

# CM, CME

Horizontal, multistage centrifugal pumps

50/60 Hz



<b>1. Product introduction</b>	<b>4</b>	<b>16. Performance curves, CM 50 Hz</b>	<b>38</b>
<b>2. Overview</b>	<b>6</b>	CM 1	38
<b>3. Applications</b>	<b>7</b>	CM 3	39
<b>4. Features and benefits</b>	<b>9</b>	CM 5	40
<b>5. Identification</b>	<b>11</b>	CM 10	41
<b>6. Product range</b>	<b>12</b>	CM 15	42
<b>7. Performance range</b>	<b>14</b>	CM 25	43
CM, 50 Hz	14		
CM, 60 Hz	14		
New-generation CME, 50/60 Hz	15		
CME, 50/60 Hz	15		
<b>8. Operating conditions</b>	<b>17</b>	<b>17. Performance curves, CM 60 Hz</b>	<b>44</b>
Ambient temperature	17	CM 1	44
Storage and transport temperature	17	CM 3	45
Installation altitude	17	CM 5	46
Installation of pump	18	CM 10	47
Maximum operating pressure and permissible liquid temperature	18	CM 15	48
Frequency of starts and stops	18	CM 25	49
Operation in condensing environments	18		
Environmental rating	19		
Operating range of the shaft seal	19		
Viscosity	19		
Sound pressure level	19		
<b>9. Construction</b>	<b>21</b>	<b>18. Performance curves, CME 50/60 Hz</b>	<b>50</b>
Pump	21	CME 1	50
Motor	21	CME 3	51
Frequency converter operation	22	CME 5	52
Shaft seal	22	CME 10	53
Material specification	25	CME 15	54
		CME 25	55
<b>10. CME pumps</b>	<b>26</b>	<b>19. Dimensions, CM 50 Hz</b>	<b>56</b>
Communication with CME pumps	26	CM 1-A	56
Speed control of CME pumps	27	CM 1-I and CM 1-G	57
<b>11. Grundfos CUE</b>	<b>29</b>	CM 3-A	58
CM pumps connected to Grundfos CUE, external frequency converters	29	CM 3-I and CM 3-G	59
		CM 5-A	72
<b>12. Approvals and markings</b>	<b>30</b>	CM 5-I and CM 5-G	73
Approvals	30	CM 10-A	74
Markings	30	CM 10-I and CM 10-G	75
		CM 15-A	76
<b>13. Certificates</b>	<b>31</b>	CM 15-I and CM 15-G	77
		CM 25-A	78
		CM 25-I and CM 25-G	79
<b>14. Selection and sizing</b>	<b>34</b>	<b>20. Dimensions, CM 60 Hz and 50/60 Hz</b>	<b>68</b>
Selection of pumps	34	CM 1-A	68
Selection of CME pumps	36	CM 1-I and CM 1-G	69
<b>15. How to read the curve charts</b>	<b>37</b>	CM 3-A	70
Guidelines for performance curves	37	CM 3-I and CM 3-G	71
		CM 5-A	72
		CM 5-I and CM 5-G	73
		CM 10-A	74
		CM 10-I and CM 10-G	75
		CM 15-A	76
		CM 15-I and CM 15-G	77
		CM 25-A	78
		CM 25-I and CM 25-G	79
		<b>21. Dimensions, CME 60 Hz and 50/60 Hz</b>	<b>80</b>
		CME 1-A	80
		CME 1-I and CME 1-G	81
		CME 3-A	83
		CME 3-I and CME 3-G	84
		CME 5-A	86
		CME 5-I and CME 5-G	87
		CME 10-A	89
		CME 10-I and CME 10-G	90
		CME 15-A	91
		CME 15-I and CME 15-G	92
		CME 25-A	93
		CME 25-I and CME 25-G	94

<b>22. Weights and shipping volume</b>	<b>95</b>
<b>23. Motor data</b>	<b>106</b>
Mains-operated motors, 50 Hz	106
Mains-operated motors, 60 Hz	107
Mains-operated motors, 50/60 Hz	108
Speed-controlled motors	109
Additional data for speed-controlled motors	111
<b>24. Customisation</b>	<b>113</b>
Motors	113
Pumps	119
<b>25. Accessories</b>	<b>120</b>
Pipework connections	120
Potentiometer for CME	125
Communication interface modules (CIM) for CME	125
Communication interface units (CIU) for CME	125
Grundfos GO Remote	126
Sensors for CME	127
MP 204 motor protector	128
Cover for CM motor	128
Angled cable gland	128
<b>26. Further product documentation</b>	<b>129</b>
WebCAPS	129
WinCAPS	130
GO CAPS	131

## 1. Product introduction

The Grundfos CM and CME pumps are non-self-priming, horizontal, multistage, end-suction centrifugal pumps. The pumps are of the close-coupled type. CM pumps are fitted with mains-operated motors whereas the motor for CME pumps has an integrated frequency converter. Both CM and CME pumps have mechanical shaft seals.

The CM and CME pumps are available in these three material versions:

- cast iron (EN-GJL-200)\*
- stainless steel (EN 1.4301/AISI 304)
- stainless steel (EN 1.4401/AISI 316).

\* The pump shaft, impeller, chamber and filling plugs are made of stainless steel (EN 1.4301/AISI 304).

CM



TM05 1128 2211 - TM05 1129 2211

**Fig. 1** Grundfos CM pumps

The CM pumps are unique products that have been developed in order to fulfil a wide variety of customer demands. The development of the pumps has resulted in no less than five patent applications.

The CM pumps are available in various sizes and numbers of stages to provide the flow and pressure required.


The CM pumps consist of two main components: the motor and the pump unit. The motor is a Grundfos motor designed to EN standards. The pump unit incorporates optimised hydraulics and offers various types of connections.

The pumps offer many advantages, some of which are listed below and described in detail in *Features and benefits* on page 9:

- compact design
- worldwide usage
- high reliability
- service-friendly
- wide performance range
- low noise
- customised solutions.

# CM, CME

## CME

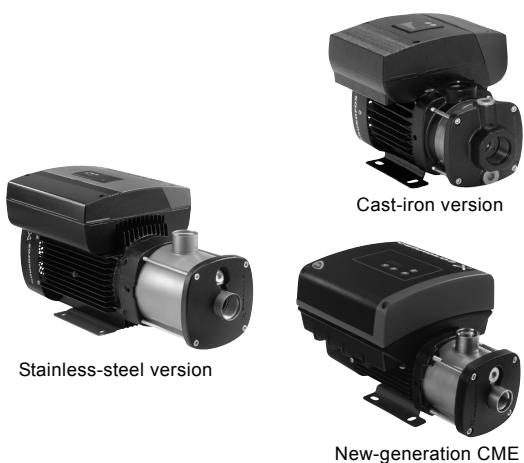

**Fig. 2** Grundfos CME pumps

The CME pumps are built on the basis of CM pumps. CME pumps belong to the so-called E-pump family. The difference between the CM and the CME pump ranges is the motor.

The CME pump motor is a Grundfos MGE motor designed to EN standards. The motor incorporates a frequency converter.

Frequency control enables continuously variable control of the motor speed, which makes it possible to set the pump to operation at any duty point. The aim of continuously variable control of the motor speed is to adjust the performance to a given requirement.

It is possible to connect a pressure sensor to the built-in frequency converter on CME pumps.

For further information, see *Sensors for CME* on page 127.

The pump materials are identical to those of the CM pump range.

### New-generation CME 0.37 to 2.2 kW (supply voltages S, T, U)

The CME pumps in this range are fitted with the new-generation MGE motors which are permanent-magnet motors incorporating a high-efficiency frequency converter. This ensures an even higher efficiency of the pump.

The new motor including frequency converter has a total efficiency which exceeds the IE4 super premium efficiency level defined for fixed-speed motors.

### CME 0.37 to 7.5 kW (supply voltages K, L, M, N, Q, R)

The CME pumps in this range are fitted with the former generation of MGE motors which are asynchronous motors. These motors are IE2-compliant as standard. Grundfos is in the process of phasing out these motors in the range from 0.37 to 2.2 kW. The timing is different throughout the world. Contact Grundfos for more information.

## Selecting a CME pump

Select a CME pump if the following features are required:

- controlled operation, i.e. consumption fluctuates
- constant pressure
- communication with the pump.

Adaptation of performance through frequency-controlled speed offers obvious benefits such as:

- energy savings
- increased comfort
- control and monitoring of the application and pump performance.


For further information about CME pumps, see *CME pumps* on page 26.

TM05 1126 2211 - TM05 1122 2211 - TM05 6830 0113

## 2. Overview



**Construction**




Pages 21 to 25

**Certificates and approvals**



Pages 31 and 32

**Selection and sizing**



Pages 34 to 36

**Applications**



Pages 7 and 8

**Identification**




Page 11

**Product range**




Pages 12 and 13

**Operating conditions**




Pages 17 to 20

**Performance curves**



Pages 38 to 55

**Dimensions**



Pages 56 to 94

**Motor data**



Pages 106 to 111

**Accessories**



Pages 120 to 128

**Customisation**



Page 113

**Further product information**



Pages 129 and 131

### 3. Applications

The CM and CME pumps are designed to cover a wide variety of applications, ranging from small domestic installations to large industrial systems. The pumps are therefore suitable for a wide diversity of pumping systems where the performance and material of the pump must meet specific demands.

Some of the most typical applications are mentioned below:

- washing and cleaning
- water treatment
- temperature control
- pressure boosting.

#### Washing and cleaning



G13572

**Fig. 3** Washing and cleaning

CM and CME pumps can be used in washing and cleaning applications, which usually involve pumping of water containing soap or other cleaning agents.

#### Reference applications

Typical washing and cleaning applications:

- degreasing and washing of production equipment in industrial environments such as the food and beverage industry
- washing machines
- vehicle-washing tunnels
- mobile-washing units
- units for CIP (Cleaning In Place).

#### Water treatment



G7052

**Fig. 4** Water treatment


In water treatment plants, the water undergoes a process which makes it more suited for its end-use. In this process, the CM and CME pumps can be utilised either as feed pumps or as booster pumps.

#### Reference applications

Typical water treatment applications:

- nano-, micro- and ultra-filtration systems
- softening, ionising, demineralising systems
- desalination systems
- distillation systems
- separators
- swimming baths.

#### Temperature control

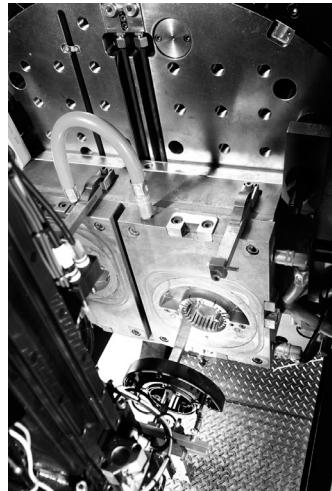

G1A6288

**Fig. 5** Temperature control

Temperature control involves applications where the CM and CME pumps circulate a liquid in a closed loop consisting of a heating or cooling element for optimising a process by means of temperature. Temperature control is also chilling of equipment or food and beverage in the food production industry.

## Reference applications

The CM and CME pumps can for example be used in temperature control systems such as:

- electronic data processing
- laser equipment
- medical equipment
- industrial refrigeration
- heating and cooling in industrial processes
- moisturising and humidifying.

To ensure safe and reliable operation in applications involving temperature control, we offer CM and CME pumps designed to meet your needs!

We provide solutions for applications involving pumping of these liquids:

- liquids at temperatures down to -20 °C
- high-temperature liquids
- high-viscous liquids, etc.

### Pumping of liquids at temperatures down to -20 °C

When pumping liquids at temperatures down to -20 °C, it is crucial that the pump parts are made of the right materials and have the right dimensions. At such low temperatures, the selection of wrong materials and dimensions may cause deformation because of thermal expansion, and eventually stoppage of operation.

**Note:** CM and CME pumps for pumping liquids at temperatures below -20 °C are available on request. Please contact Grundfos.

### Pumping of high-temperature liquids

The pumping of hot liquids such as water-based liquids up to +120 °C demands much of the pump parts, such as shaft seals and rubber parts.

### Pumping of high-viscous liquids

In applications where high-viscous liquids are pumped, the motor of the pump can be overloaded, and the pump performance will be reduced.

The viscosity of a pumped liquid depends strongly on the pumped liquid and its temperature.

To meet the above-mentioned requirements, we offer CM and CME pumps with oversize motors.

## Pressure boosting



G0526

**Fig. 6** Pressure boosting

In pressure-boosting applications, the pumped liquid must be delivered at a desired pressure on demand. The main priorities in pressure-boosting applications are to ensure maximum reliability and user comfort. Therefore, the CM and CME pumps are also ideal for such applications.

### Reference applications

Typical pressure-boosting applications:

- pressure boosting and transfer of drinking water
- process-water systems.

### Other applications

Besides the applications mentioned above, the CM and CME pumps can be used in many other applications.

Examples:

- distilling systems
- dosing/mixing
- evaporation
- comprised machinery
- chemical industry
- pharmaceutical industry.

## 4. Features and benefits



TM04 3509 4508 - TM04 3511 4508

**Fig. 7** CM and CME pumps

CM and CME pumps present the following features and benefits:

### Compact design

Pump and motor are integrated in a compact and user-friendly design. The pump is fitted to a low-profile base plate, making it ideal for installation in systems where compactness is important.

### Modular construction/customised solutions

The modular construction of the CM and CME pumps makes it easy to create many different variants based on standard factory parts. This means that it is possible to create pump variants that are customised for the application in question.

### Energy-optimised pumps

CM and CME pumps are energy-optimised and comply with the EuP Directive (Commission Regulation (EC) No 547/2012) in which most pumps are classified/graduated in a new energy efficiency index (MEI). See also page 16.

### Worldwide usage

- With different voltage and frequency combinations, the CM and CME product ranges cover markets worldwide.
- The CM and CME product ranges have been approved and are marked for worldwide usage. See *Approvals and markings* on page 30.

### High reliability


New state-of-the-art shaft seal design and materials offering these benefits:

- high wear resistance and long operating life
- improved sticking and dry-running capabilities.

The pumps are less sensitive to impurities in the pumped liquid than similar pumps of the canned-rotor type.

### Easy installation and commissioning

- A Quick Guide supplied with the CM pump enables easy installation and commissioning. Detailed multilingual installation and operating instructions are supplied with each pump.
- An installation indicator fitted to three-phase CM pumps makes it easy to see if the electrical connection of the motor is correct. Based on the motor cooling air, it indicates the direction of rotation of the motor.

**Fig. 8** Installation indicator

TM05 0870 1811

### Service-friendly

- Service was in mind during the development.
- No special service tools required.
- Spare parts in stock for quick delivery.
- Service parts available as kits, single parts or bulks.
- Service instructions and video make it simple to disassemble and assemble the pump.
- Service kit instructions available where estimated necessary.

**Wide performance range**

Can be used in a wide range of applications:

- washing and cleaning
- water treatment
- temperature control
- pressure boosting
- chemical industry
- pharmaceutical industry
- etc.

Product range in WinCAPS and WebCAPS.

See *Further product documentation* on page 129.

**Low noise level**

The CM and CME pumps offer very silent operation.

**High-performance hydraulics**

Pump efficiency is maximised by the optimised hydraulics and carefully crafted production technology.

**Electrocoated cast-iron parts**

- optimised corrosion resistance
- better efficiency because of smooth surfaces.

**Customised solutions**

It is possible to create many different variants of the CM and CME pumps. For further information, see *Customisation* on page 113.

- motor adaptation
- pump body modifications.

**Grundfos motor**

Grundfos motors are remarkably silent and highly efficient.

Grundfos motors are available with integrated frequency converter designed for speed-controlled operation.

**Data and literature about the CM and CME pumps**

All literature and technical data related to CM and CME pumps are available online in Grundfos WebCAPS.

## 5. Identification

Example	CM	10	-	3	A	-	R	-	I	-	E	-	A	V	B	E	F	-	A	-	A	-	N																					
<b>Type range</b>	CM:	Centrifugal Modular																					Sensor																					
CME:	Centrifugal Modular with integrated frequency converter																						N: No sensor																					
<b>Rated flow rate</b>	Rated flow rate at 50 Hz [m <sup>3</sup> /h]																						Mains plug																					
Number of impellers																							A: Prepared for cable glands B: Harting plug C: With cable D: Cable gland included																					
<b>Pump version</b>	A: Basic version B: Oversize motor (one flange size larger) E: Pumps with certificates/approvals N: CME pump with pressure sensor P: Undersize motor (one flange size smaller) T: Oversize motor (two flange sizes larger) BE: Oversize motor with certificates/approvals BN: Oversize motor with pressure sensor EN: Pumps with certificates/approvals and pressure sensor EP: Pumps with certificates/approvals and undersize motor ET: Pumps with certificates/approvals and double-oversize motor EX: Pumps with certificates/approvals and two other variants selected NP: Undersize motor with pressure sensor NT: Double-oversize motor with pressure sensor O: Self-priming version (max. suction lift 8 metres) S: Self-priming version (max. suction lift 4 metres) X: Special pump																						Motor information																					
<b>Pipe connection</b>	C: Tri-Clamp® F: DIN/ANSI/JIS flange P: Victaulic® coupling R: Whitworth thread Rp (ISO 7/1) S: Internal NPT thread																						A: Standard motor (IP55) B: Phase-insulated motor for use with frequency converter C: Condensing environments D: Pt100 in stator E: Angular contact bearing F: Motor heater G: Three-phase motor with overload protection H: Single-phase motor with no protection I: Radio communication not available																					
<b>Materials in contact with pump media</b>	A: Suction and discharge parts Pump shaft EN 1.4301/AISI 304 Impellers/chambers EN 1.4301/AISI 304 G: Sleeve EN 1.4401/AISI 316 Pump shaft EN 1.4401/AISI 316 Impellers/chambers EN 1.4401/AISI 316 I: Sleeve EN 1.4301/AISI 304 Pump shaft EN 1.4301/AISI 304 Impellers/chambers EN 1.4301/AISI 304 X: Special version																						Supply voltage																					
<b>Rubber parts in pump (excluding neck ring and shaft seal)</b>	E: EPDM (ethylene propylene) K: FFKM (perflour) V: FKM (flour)																						A: 1 x 220 V, 60 Hz B: 1 x 115/230 V, 60 Hz B1: 1 x 115/230 V, 60 Hz, with terminal board C: 1 x 220-240 V, 50 Hz D: 1 x 127 V, 60 Hz E: 3 x 208-230/440-480 V, 60 Hz E1: 3 x 208-230/440-480 V, 60 Hz, with terminal board F: 3 x 220-240/380-415 V, 50 Hz G: 3 x 200/346 V, 50 Hz; 200-220/346-380 V, 60 Hz H: 3 x 575 V, 60 Hz I: 3 x 400 V, 50/60 Hz J: 3 x 380-415 V, 50 Hz; 440-480 V, 60 Hz K: 1 x 200-240 V, 50/60 Hz (E-motor) L: 3 x 380-480 V, 50/60 Hz (E-motor) M: 1 x 208-230 V, 50/60 Hz (E-motor) N: 3 x 460-480 V, 60 Hz (E-motor) O: 3 x 220-240/380-415 V, 50 Hz O: 3 x 220-255/380-440 V, 60 Hz Q: 3 x 208-230 V, 50/60 Hz (E-motor) R: 3 x 200-230 V, 50/60 Hz (E-motor) S: 3 x 380-500 V, 50/60 Hz (E-motor) <sup>1)</sup> T: 3 x 440-480 V, 50/60 Hz (E-motor) <sup>1)</sup> U: 1 x 200-240 V, 50/60 Hz (E-motor) <sup>1)</sup>																					
<b>Note:</b> Gaskets between chambers of cast-iron versions are always made of Tesnit® BA-U.																							Material of secondary seal																					
<b>Shaft seal</b>	A: O-ring seal with fixed driver R: O-ring seal with fixed driver and reduced seal face																						E: EPDM (ethylene propylene) K: FFKM (perflour) V: FKM (flour)																					
<b>Material of stationary seal face</b>	B: Carbon, resin-impregnated Q: Silicon carbide (SiC) U: Tungsten carbide																						Material of rotating seal face																					
<b>Material of rotating seal face</b>	Q: Silicon carbide (SiC) V: Aluminium oxide (Al2O3) U: Tungsten carbide																																											

<sup>1)</sup> The new-generation MGE, currently 0.37 to 2.2 kW.

Note: The type key cannot be used for ordering as not all combinations are possible.

## 6. Product range

Pump type	50 Hz Material	60 Hz Material	Shaft seal	Mains-operated motor			Electronically speed-controlled motor
				50 Hz	60 Hz	50/60 Hz	
				Voltage [V]	Voltage [V]	Voltage [V]	
CM 1-2	• Cast iron EN-GJL-200 (CM-A) • Stainless steel EN 1.4301/AISI 304 (CM-I)	• Stainless steel EN 1.4401/AISI 316 (CM-G)	• AVBE, AVBV	• AQQE, AQBE AQQV, AQBV	• 1 x 220-240 V (supply voltage C)	• 3 x 220-240/380-415 V (supply voltage F)	•
CM 1-3	• •	• •	• •	• •	• •	• 1 x 220 V (supply voltage A)	•
CM 1-4	• •	• •	• •	• •	• •	• 1 x 115/230 V (supply voltage B/B1) <sup>4)</sup>	•
CM 1-5	• •	• •	• •	• •	• •	• 1 x 127 V (supply voltage D) <sup>1)</sup>	•
CM 1-6	• •	• •	• •	• •	• •	• 3 x 208-230/440-480 V (supply voltage E/E1) <sup>4)</sup>	•
CM 1-7	• •	• •	• •	• •	• •	• 3 x 575 V (supply voltage H)	•
CM 1-8	• •	• •	• •	• <sup>2)</sup>	• •	• 3 x 220-240/380-415 V, (50 Hz)/ 3 x 220-255/380-440 V, (60 Hz) (supply voltage O)	•
CM 1-9	• •	• •	• •	• <sup>2)</sup>	• •	• 3 x 380-415 V, (50 Hz)/ 3 x 440-480 V, (60 Hz) (supply voltage J)	•
CM 1-10	• •	• •	• •	• <sup>2)</sup>	• •	• 3 x 200 V/346 V, (50 Hz); 3 x 200-220/346-380 V, (60 Hz), (supply voltage G)	•
CM 1-11	• •	• •	• •	• <sup>3)</sup>	• •	• 3 x 400 V, (50/60 Hz) (supply voltage I)	•
CM 1-12	• •	• •	• •	• <sup>3)</sup>	• •	• 3 x 380-480 V, (50/60 Hz) (supply voltage L)	•
CM 1-13	• •	• •	• •	• <sup>3)</sup>	• •	• 1 x 200-240 V, (50/60 Hz) (supply voltage K)	•
CM 1-14	• •	• •	• •	• <sup>3)</sup>	• •	• 3 x 460-480 V, (60 Hz) (supply voltage N)	•
CM 3-2	• •	• •	• •	• •	• •	• 1 x 208-230 V, (50/60 Hz) (supply voltage M)	•
CM 3-3	• •	• •	• •	• •	• •	• 3 x 200-230 V, 50/60 Hz (supply voltage R)	•
CM 3-4	• •	• •	• •	• •	• •	• 3 x 208-230 V, 50/60 Hz (supply voltage Q)	•
CM 3-5	• •	• •	• •	• •	• •	• 3 x 380-500 V, (50/60 Hz) (supply voltage S) <sup>5)</sup>	•
CM 3-6	• •	• •	• •	• •	• •	• 3 x 440-480 V, (50/60 Hz) (supply voltage T) <sup>5)</sup>	•
CM 3-7	• •	• •	• •	• <sup>2)</sup>	• •	• 1 x 200-240 V, (50/60 Hz) (supply voltage U) <sup>5)</sup>	•
CM 3-8	• •	• •	• •	• <sup>2)</sup>	• •	•	•
CM 3-9	• •	• •	• •	• <sup>2)</sup>	• •	•	•
CM 3-10	• •	• •	• •	• <sup>2)</sup>	• •	•	•
CM 3-11	• •	• •	• •	• <sup>3)</sup>	• •	•	•
CM 3-12	• •	• •	• •	• <sup>3)</sup>	• •	•	•
CM 3-13	• •	• •	• •	• <sup>3)</sup>	• •	•	•
CM 3-14	• •	• •	• •	• <sup>3)</sup>	• •	•	•

1) On request.

2) Neither suitable for 60 Hz mains-operated pumps, nor for CME pumps running at 100 % speed.

3) Not suitable for pumping liquids at temperatures above +90 °C.

4) Pumps with supply voltages B and E are supplied for wire connection without terminal board inside the terminal box (flying wires). Pumps with supply voltages B1 and E1 are supplied with terminal board inside the terminal box.

5) The new-generation MGE, currently 0.37 to 2.2 kW.

Pump type	50 Hz		60 Hz		Shaft seal	Mains-operated motor			Electronically speed-controlled motor	
	Material	Material				50 Hz	60 Hz	50/60 Hz		
			Voltage [V]	Voltage [V]		Voltage [V]	Voltage [V]	Voltage [V]		
CM 5-2	•	•	Cast iron EN-GJL-200 (CM-A)	Stainless steel EN 1.4301/AISI 304 (CM-I)		•	•	•		
CM 5-3	•	•	Stainless steel EN 1.4401/AISI 316 (CM-G)	Cast iron EN-GJL-200 (CM-A)		•	•	•		
CM 5-4	•	•	Stainless steel EN 1.4301/AISI 304 (CM-I)	Stainless steel EN 1.4401/AISI 316 (CM-G)		•	•	•		
CM 5-5	•	•				•	•	•		
CM 5-6	•	•				•	•	•		
CM 5-7	•	•				•	•	•		
CM 5-8	•	•		• <sup>2)</sup>		•	•	•		
CM 5-9	•	•		• <sup>2)</sup>		•	•	•		
CM 5-10	•	•		• <sup>2)</sup>		•	•	•		
CM 5-11	•	•		(• <sup>3)</sup> )	(• <sup>3)</sup> )	•	•	•		
CM 5-12	•	•		(• <sup>3)</sup> )	(• <sup>3)</sup> )	•	•	•		
CM 5-13	•	•		(• <sup>3)</sup> )	(• <sup>3)</sup> )	•	•	•		
CM 10-1	•	•	•	•	•	•	•	•	•	
CM 10-2	•	•	•	•	•	•	•	•	•	
CM 10-3	•	•	•	•	•	•	•	•	•	
CM 10-4	•	•	•	•	•	•	•	•	•	
CM 10-5	•	•	•	• <sup>2)</sup>	•	•	•	•	•	
CM 10-6	•	•	•	• <sup>2)</sup>	•	•	•	•	•	
CM 10-7	•	•		(• <sup>3)</sup> )	(• <sup>3)</sup> )	•	•	•	•	
CM 10-8	•	•		(• <sup>3)</sup> )	(• <sup>3)</sup> )	•	•	•	•	
CM 15-1	•	•	•	•	•	•	•	•	•	
CM 15-2	•	•	•	•	•	•	•	•	•	
CM 15-3	•	•	•	•	•	•	•	•	•	
CM 15-4	•	•	•	• <sup>2)</sup>	•	•	•	•	•	
CM 25-1	•	•	•	•	•	•	•	•	•	
CM 25-2	•	•	•	•	•	•	•	•	•	
CM 25-3	•	•		• <sup>2)</sup>	•	•	•	•	•	
CM 25-4	•	•		• <sup>2)</sup>	•	•	•	•	•	

<sup>1)</sup> On request.

<sup>2)</sup> Neither suitable for 60 Hz mains-operated pumps, nor for CME pumps running at 100 % speed.


<sup>3)</sup> Not suitable for pumping liquids at temperatures above +90 °C.

<sup>4)</sup> Pumps with supply voltages B and E are supplied for wire connection without terminal board inside the terminal box (flying wires).  
Pumps with supply voltages B1 and E1 are supplied with terminal board inside the terminal box.

<sup>5)</sup> The new-generation MGE, currently 0.37 to 2.2 kW.


## 7. Performance range

**CM, 50 Hz**

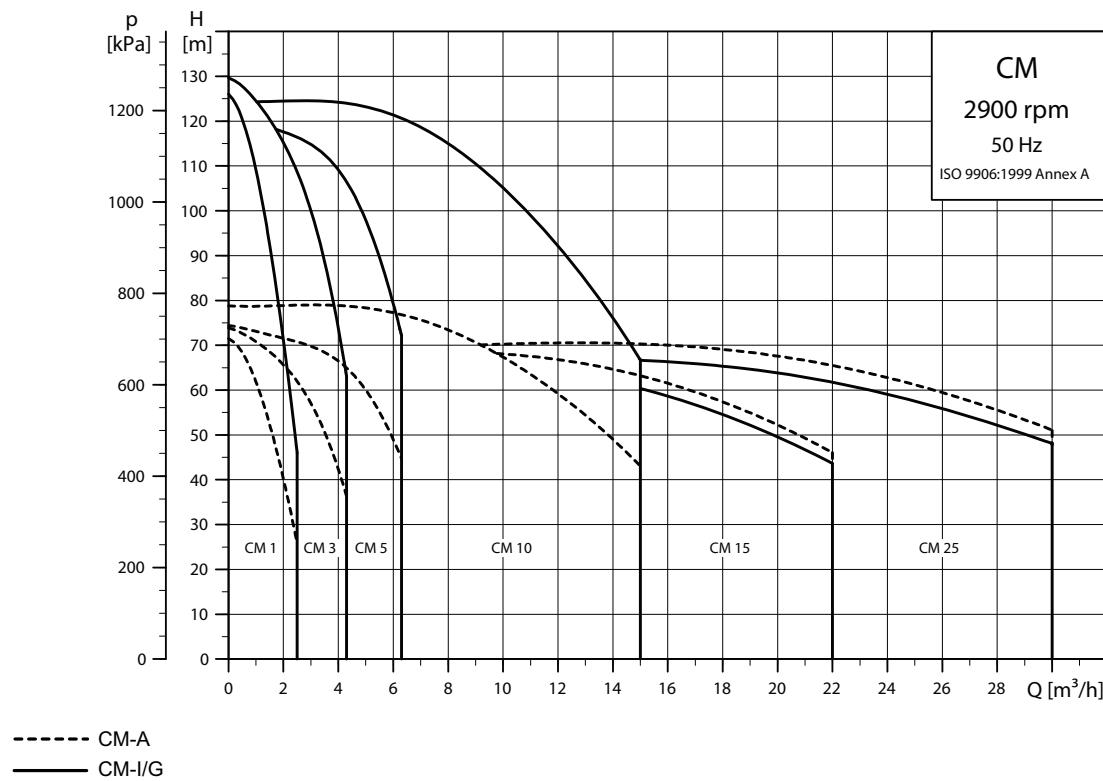

TM04 3340 5112


**CM, 60 Hz**

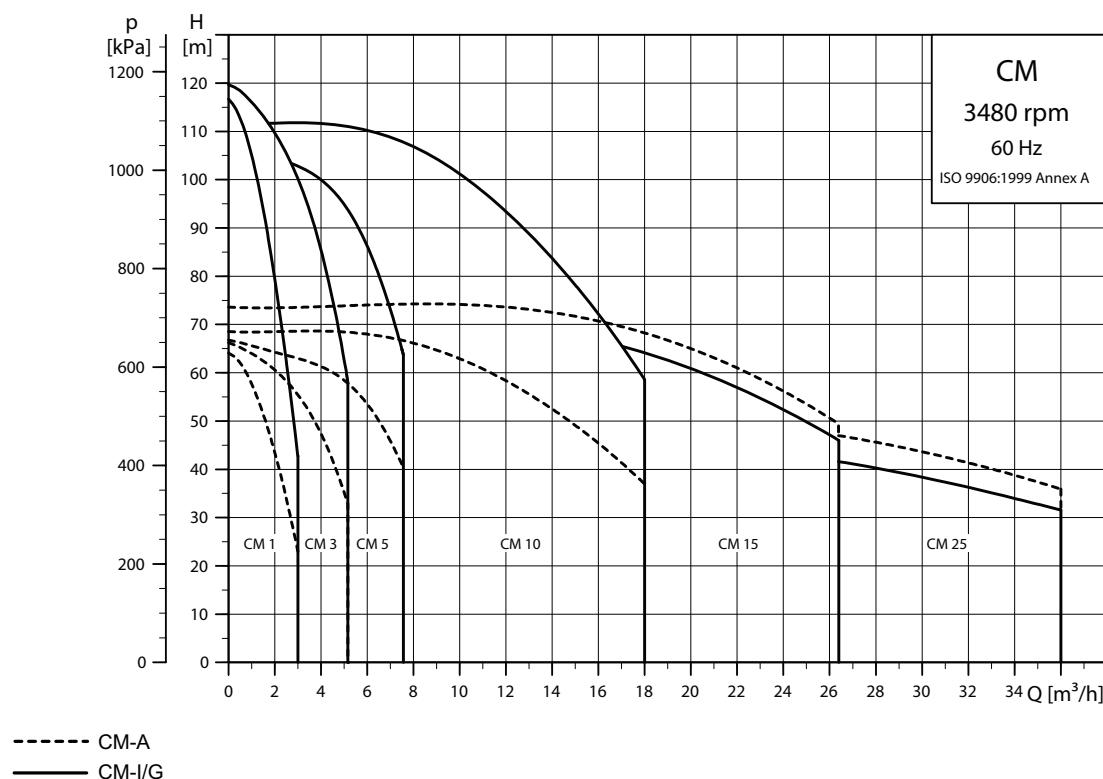

TM04 3369 5112

**New-generation CME, 50/60 Hz**


(supply voltages S, T, U)

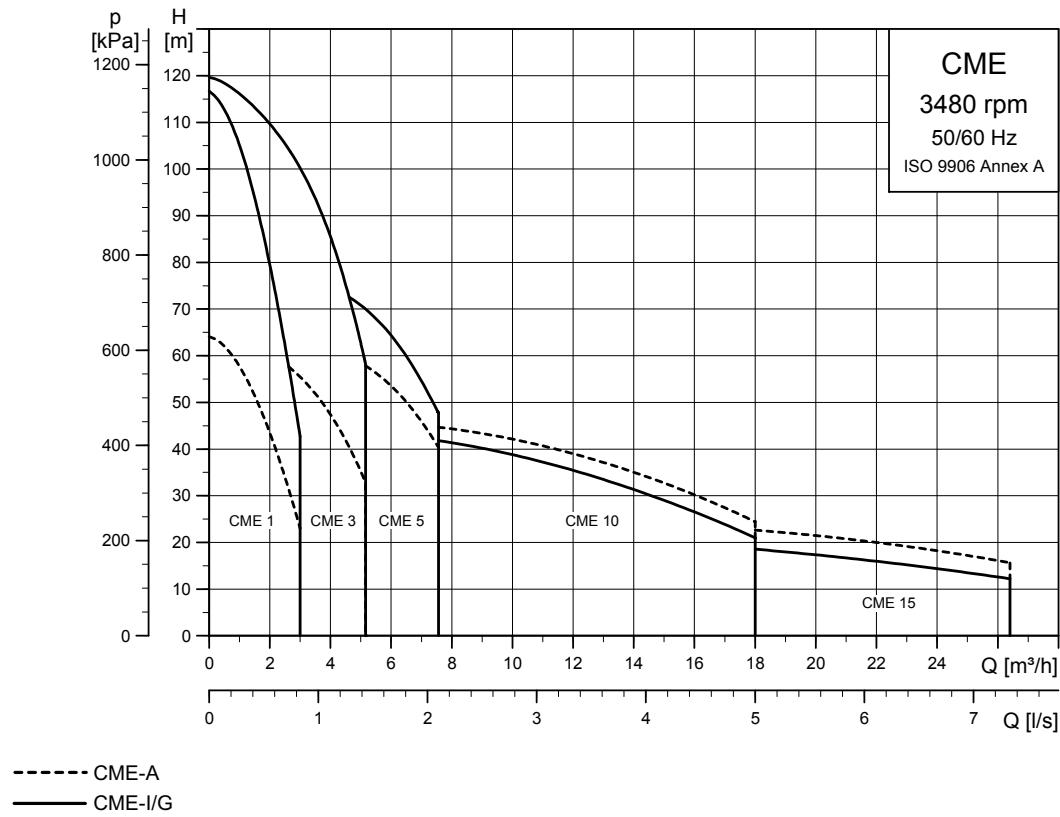

TM05 7576 1313

**CME, 50/60 Hz**

(supply voltages K, L, M, N, Q, R)

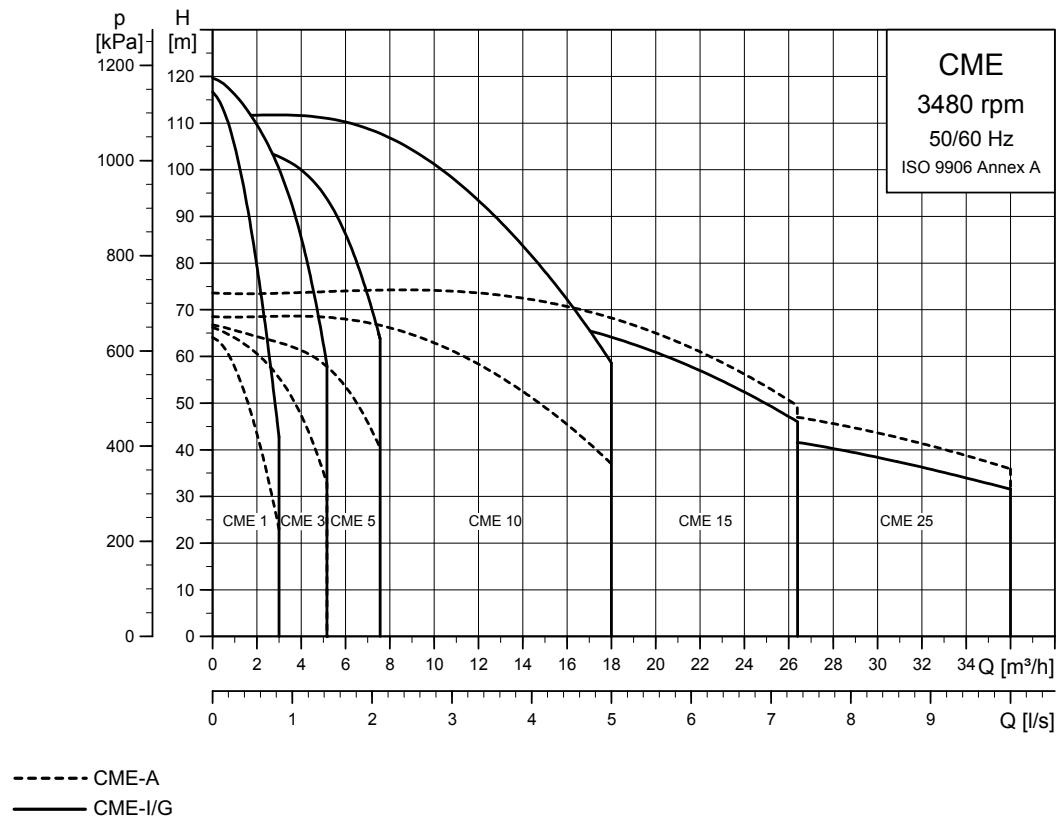

TM04 3568 5112

## **EuP ready**

The CM, CME pumps are energy-optimised and comply with the EuP Directive (Commission Regulation (EC) No 547/2012) which has been effective since 1 January 2013. As from this date, all pumps will be classified/graduated in a new energy efficiency index (MEI).

### **Minimum efficiency index**

Minimum efficiency index (MEI) means the dimensionless scale unit for hydraulic pump efficiency at best efficiency point (BEP), part load (PL) and overload (OL). The Commission Regulation (EU) sets efficiency requirements to  $MEI \geq 0.10$  as from 1 January 2013 and  $MEI \geq 0.40$  as from 1 January 2015. An indicative benchmark for best-performing water pump available on the market as from 1 January 2013 is determined in the Regulation.

- The benchmark for most efficient water pumps is  $MEI \geq 0.70$ .
- The efficiency of a pump with a trimmed impeller is usually lower than that of a pump with the full impeller diameter. The trimming of the impeller will adapt the pump to a fixed duty point, leading to reduced energy consumption. The minimum efficiency index (MEI) is based on the full impeller diameter.
- The operation of this water pump with variable duty points may be more efficient and economic when controlled, for example, by the use of a variable-speed drive that matches the pump duty to the system.
- Information on benchmark efficiency is available at <http://europump.eu/efficiencycharts>.

Pump type	MEI	Efficiency at best efficiency point [%]
CM, CME 1 A	0.70	37.1
CM, CME 1 I/G	0.68	36.4
CM, CME 3 A	0.70	50.6
CM, CME 3 I/G	0.70	49.3
CM, CME 5 A	0.70	53.3
CM, CME 5 I/G	0.70	52.1
CM, CME 10 A	0.70	62.2
CM, CME 10 I/G	0.52	57.9
CM, CME 15 A	0.70	67.5
CM, CME 15 I/G	0.59	63.1
CM, CME 25 A	0.70	68.3
CM, CME 25 I/G	0.19	62.7

## 8. Operating conditions

### Ambient temperature

The maximum ambient temperature depends on the liquid temperature. The table below shows within which temperature ranges the CM and CME pumps should be used.

**Note:** The maximum permissible liquid temperature for CM-A and CME-A is +90 °C.


Maximum ambient temperature	Liquid temperature	Pump type		
		CM	CME <sup>1)</sup>	CME
+55 °C	+90 °C	•	-	-
+50 °C	+100 °C <sup>1)</sup>	•	•	-
+45 °C	+110 °C <sup>1)</sup>	•	•	-
+40 °C	+120 °C <sup>1)</sup>	•	•	•

<sup>1)</sup> New-generation CME 0.37 to 2.2 kW (supply voltages S, T, U)

### CM (mains-operated motors)

If the ambient temperature for CM pumps exceeds 55 °C, the motor must not be fully loaded due to the risk of overheating.

In such cases, it may be necessary to derate the motor output or use an oversize motor with higher rated output. The CM pumps can be derated in relation to ambient temperature without consequence. Contact Grundfos for further information.

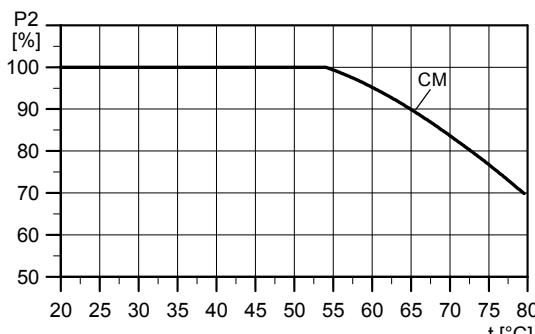

TM05 7630 1313

Fig. 9 Derating of CM pump, in relation to ambient temperature

### CME (speed-controlled motors)

The electronics incorporated in the CME pumps is limiting the maximum ambient temperature.

This means that the maximum ambient temperature must not be exceeded. If the pump is operated at temperatures exceeding the maximum ambient temperature, the motor life will be reduced.

#### Maximum ambient temperature

CME 0.37 to 2.2 kW (supply voltages S, T, U):

50 °C.

CME 0.37 to 7.5 kW (supply voltages K, L, M, N, Q, R):

40 °C.

**Note:** It is possible to operate the new-generation CME pumps at 60 °C as well. In such case, contact Grundfos for further information.

### Storage and transport temperature

CM: -50 to +70 °C.

CME: -30 to +60 °C.

### Installation altitude

Installation altitude is the height above sea level of the installation site. Motors installed at maximum altitude can be loaded 100 %. Motors installed above maximum altitude must not be fully loaded due to the low density and consequently low cooling effect of the air.

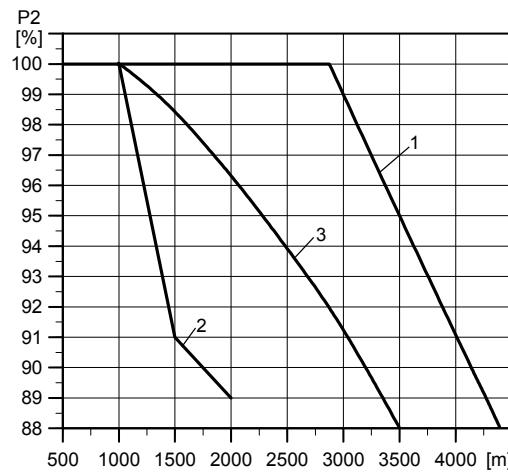


Fig. 10 Relationship between motor output (P<sub>2</sub>) and altitude

Pos.	Motor output [kW]	Pump type
1	0.37 - 7.5	CM
2	0.37 - 2.2	CME <sup>1)</sup>
3	0.37 - 7.5	CME

<sup>1)</sup> New-generation CME 0.37 to 2.2 kW (supply voltages S, T, U)

TM05 7630 1313

## Installation of pump

The pump must be installed on a plane surface and fixed so that it cannot be displaced during startup and operation.

The pump must be installed so that air locks are avoided in the pump housing and pipework. Figure 11 shows the permissible pump positions.

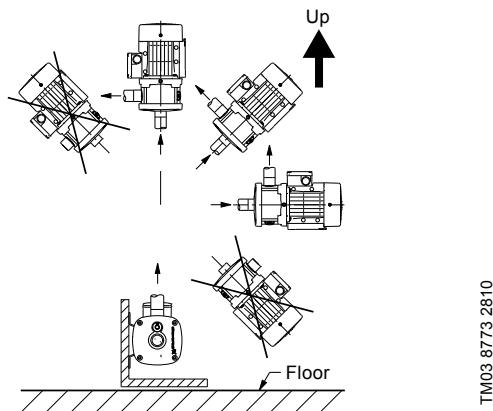


Fig. 11 Pump positions

The pump should be installed with easy access for inspection, maintenance and service.

The pump should be installed in a well-ventilated location.

## Maximum operating pressure and permissible liquid temperature

The maximum operating pressure and the permissible liquid temperature depend on the pump material, the type of shaft seal and the pumped liquid.

Material variant	Shaft seal	Permissible liquid temperature <sup>1)</sup>	Maximum operating pressure
Cast iron (EN-GJL-200)	AVBx	-20 to +40 °C +41 to +90 °C	10 bar 6 bar
	AQQx/ AQBx	-20 to +90 °C	10 bar
	RUUx	-20 to +60 °C	6 bar
Stainless steel (EN 1.4301/AISI 304)	AVBx	-20 to +40 °C +41 to +90 °C	10 bar 6 bar
	AQQx/ AQBx	-20 <sup>3)</sup> to +90 °C +91 to +120 °C <sup>2)</sup>	16 bar 10 bar
	RUUx	-20 to +60 °C	6 bar
Stainless steel (EN 1.4401/AISI 316)	AVBx	-20 to +40 °C +41 to +90 °C	10 bar 6 bar
	AQQx/ AQBx	-20 <sup>3)</sup> to +90 °C +91 to +120 °C <sup>2)</sup>	16 bar 10 bar
	RUUx	-20 to +60 °C	6 bar

<sup>1)</sup> At liquid temperatures below 0 °C (32 °F), higher motor outputs may be needed due to increased viscosity, for instance if glycol has been added to the water.

<sup>2)</sup> 120 °C applies only if the pump has an AQQE/AQBE shaft seal.

<sup>3)</sup> CM-I, -G and CME-I, -G pumps for liquid temperatures below -20 °C are available on request. Please contact Grundfos.

## Maximum liquid temperature change gradient

Cast-iron pumps (CM-A, CME-A) should not be used in applications where rapid temperature changes of more than 45 °C may occur. If exposed to such rapid temperature changes, a cast-iron pump may leak.

Under such operating conditions, we recommend to use stainless-steel pumps (CM-I, -G and CME-I, -G).

## Liquid temperature range

O-ring material/liquid	Permissible liquid temperature
EPDM	-20 to +120 °C
FFKM	0 to +120 °C
FKM/liquids containing water	-20 to +90 °C
FKM/oil without water	-20 to +120 °C

## Frequency of starts and stops

Maximum 100 per hour.

## Operation in condensing environments

If the liquid temperature becomes lower than the ambient temperature, condensation may form in the motor during inactivity. In such cases, a motor suited for condensing environments must be used.

When installing CM and CME pumps outdoors, provide them with a suitable cover to protect them from build-up of condensed water. See fig. 12.




Fig. 12 CME pump with protective cover

Motors in outdoor installations radiate heat to and absorb heat from their surroundings. By day, a stopped motor will absorb more heat than it radiates; by night, especially clear nights, radiation from a stopped motor may be so high that the surface temperature falls a few degrees below the air temperature. This may cause the formation of condensation. Condensation on the inner surfaces may result in moisture on the electronic components, including the printed-circuit boards, which means a risk of failure or even destruction of the motor and electronics.

Furthermore, the cover protects the motor against direct sunlight.

## Environmental rating

Three-phase CME motors hold a UL NEMA 3R environmental rating.

Single-phase CME motors have not been tested against the UL NEMA environmental rating.


All motors are IP55.

## Operating range of the shaft seal

The operating range of the shaft seal depends on operating pressure, type of shaft seal and liquid temperature.

The curve in fig. 13 shows which shaft seals are suitable at a given temperature and a given pressure.

The curve applies to clean water.

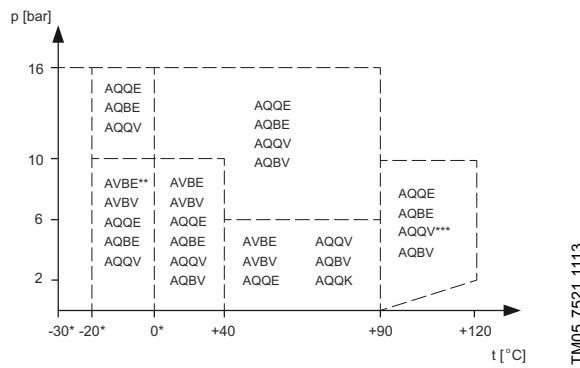

**Fig. 13** Curve for the selection of shaft seals

\* Antifreeze should be added at liquid temperatures below  $0^\circ\text{C}$ .

\*\* CM and CME pumps for liquid temperatures below  $-20^\circ\text{C}$  are available on request. Please contact Grundfos.

\*\*\* AQQV/AQBV above  $+90^\circ\text{C}$  only in media not containing water.

### Shaft seal run-in

The seal faces are lubricated by the pumped liquid, meaning that there may be a certain amount of leakage from the shaft seal.

When the pump is started up for the first time, or when a new shaft seal is installed, a certain run-in period is required before the leakage is reduced to an acceptable level. The time required for this depends on the operating conditions, i.e. every time the operating conditions change, a new run-in period will be started.

Under normal conditions, the leaking liquid will evaporate. As a result, no leakage will be detected. However, liquids such as kerosene will not evaporate. The leakage may therefore be seen as a shaft seal failure.

## Viscosity

The pumping of liquids with densities or kinematic viscosities higher than those of water will cause a considerable pressure drop, a drop in the hydraulic performance and a rise in the power consumption.

For instance at liquid temperatures below  $0^\circ\text{C}$  ( $32^\circ\text{F}$ ), higher motor outputs may be needed due to increased viscosity if glycol has been added to the water.

In such situations, the pump should be fitted with a larger motor. If in doubt, contact Grundfos or visit WebCAPS. See page 129.

## Sound pressure level

The sound pressure values in the table below apply for CM pumps. If the motor output (P2) for a given pump is not found in the table, use the nearest rounded-up value. The values for sound pressure include a tolerance of 3 dB(A) according to EN ISO 4871.

$P_2$ [kW]	50 Hz		60 Hz	
	$L_{pA}$ [dB(A)]		$L_{pA}$ [dB(A)]	
0.37	50		55	
0.55	50		53	
0.75	50		54	
1.1	52		57	
1.5	54		59	
2.2	54		59	
3.0	55		60	
4.0	62		66	
5.5	60		65	
7.5	60		65	
11.0	60		65	

The audible noise from CM pumps is primarily noise from the motor fan. The selection of CME pumps will reduce the noise at partial load, as the motor, and consequently, the motor fan runs at a lower speed. Possible flow noise from control valves is also reduced at partial load in the case of the CME pump.

## Minimum inlet pressure, NPSH

Calculation of the inlet pressure "H" is recommended in these situations:

- The liquid temperature is high.
- The flow is significantly higher than the rated flow.
- Water is drawn from depths.
- Water is drawn through long pipes.
- Inlet conditions are poor.

To avoid cavitation, make sure that there is a minimum pressure on the suction side of the pump.


The maximum suction lift "H" in metres head can be calculated as follows:

$$H = p_b \times 10.2 - \text{NPSH} - H_f - H_v - H_s$$

$p_b$	Barometric pressure in bar. (Barometric pressure can be set to 1 bar). In closed systems, $p_b$ indicates the system pressure in bar.
NPSH	Net Positive Suction Head in metres head. (To be read from the NPSH curve at the highest flow the pump will be delivering).
$H_f$	Friction loss in suction pipe in metres head. (At the highest flow the pump will be delivering).
$H_v$	Vapour pressure in metres head. (To be read from the vapour pressure scale, " $H_v$ " depends on the liquid temperature " $T_m$ ").
$H_s$	Safety margin = minimum 0.5 metres head.

If the "H" calculated is positive, the pump can operate at a suction lift of maximum "H" metres head.

If the "H" calculated is negative, an inlet pressure of minimum "H" metres head is required.

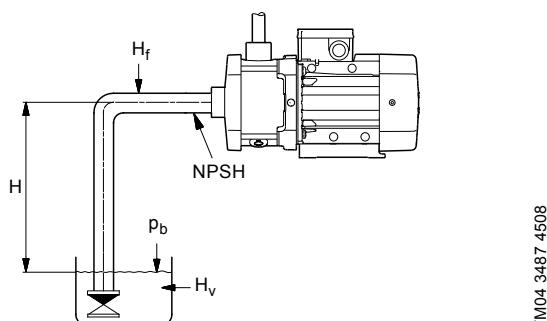

TM04 3487 4508

Fig. 14 Minimum inlet pressure (NPSH)

**Note:** To avoid cavitation, never select a pump with a duty point too far to the right on the NPSH curve.

Always check the NPSH value of the pump at the highest possible flow.

## 9. Construction

### Pump

The CM and CME pumps are non-self-priming, horizontal, multistage centrifugal pumps. The pumps have axial suction port and radial discharge port and are mounted on a base plate.

All movable parts are made of stainless steel.

The pumps are available with mains-operated motors (CM pumps) and electronically speed-controlled motors (CME pumps).

All pumps incorporate a maintenance-free mechanical O-ring shaft seal with fixed driver.



TM05 1130 2211

Fig. 15 CM and CME pump hydraulics

### Motor

CM and CME pumps are fitted with totally enclosed, fan-cooled, 2-pole motors with principal dimensions to EN 50347. The motors have been developed especially for CM and CME pumps.

Electrical tolerances comply with EN 60034.

Single-phase CME pumps are available from 0.37 to 1.5 kW.

Three-phase CME pumps are available from 0.37 to 7.5 kW.

### Soft starter

Soft starters should only be used for three-phase motors.

### Efficiency

Motors for CM and CME pumps comply with different energy-efficiency requirements throughout the world, for example the European Ecodesign.

For China, motors with CCC and CEL marking are available.

Generally, this means that all three-phase motors of 0.75 kW and up are IE2-compliant as standard. IE3-compliant motors are available on request.

The new-generation MGE motors have a total efficiency which exceeds the IE4 super premium efficiency level defined for fixed-speed motors including the frequency converter.

### Electrical data

<b>Insulation class</b>	F
<b>Enclosure class</b>	IP55*
<b>CM</b>	
Supply voltages (tolerance $\pm 10\%$ )	1 x 220 V, 60 Hz 1 x 115/230 V, 60 Hz 1 x 220-240 V, 50 Hz 1 x 127 V, 60 Hz 3 x 208-230/440-480 V, 60 Hz 3 x 220-240/380-415 V, 50 Hz 3 x 200/346 V, 50 Hz; 200-220/346-380 V, 60 Hz 3 x 575 V, 60 Hz 3 x 400 V, 50/60 Hz 3 x 400 V, 50/60 Hz 3 x 380-415 V, 50 Hz; 440-480 V, 60 Hz 3 x 220-240/380-415 V, 50 Hz 3 x 220-255/380-440 V, 60 Hz
CME	1 x 200-240 V, 50/60 Hz 1 x 208-230 V, 50/60 Hz 3 x 380-480 V, 50/60 Hz 3 x 460-480 V, 60 Hz 3 x 208-230 V, 50/60 Hz 3 x 200-230 V, 50/60 Hz 3 x 380-500 V, 50/60 Hz 3 x 440-480 V, 50/60 Hz

\* IP55 is not recommended for operation in condensing environments.

For operation in such environments, see *Operation in condensing environments* on page 18.

## Motor protection

### Mains-operated motors (CM)

Single-phase motors, 1 x 115/230 V, 60 Hz, do not incorporate motor protection and must be connected to a motor-protective circuit breaker which can be manually reset. Set the motor-protective circuit breaker according to the rated current of the motor ( $I_{1/1}$ ). See nameplate.

Other single-phase motors have built-in current- and temperature-dependent motor protection in accordance with IEC 60034-11 and require no further motor protection. The motor protection reacts to both slow- and quick-rising temperatures. The motor protection is automatically reset.

Three-phase motors up to 3 kW must be connected to a motor-protective circuit breaker which can be manually reset. Set the motor-protective circuit breaker according to the rated current of the motor ( $I_{1/1}$ ). See nameplate. Motors with power ratings of 3 kW and up have built-in thermistors (PTC)\*. The thermistors are designed according to DIN 44082. The motor protection reacts to both slow- and quick-rising temperatures.

\* Applies only to supply voltages F, G and O. Motors for other supply voltages must be connected to a motor-protective circuit breaker as described for three-phase motors up to 3 kW.

### Electronically speed-controlled motors (CME)

CME pumps require no external motor protection. The MGE motor incorporates thermal protection against steady overload and stalled condition (IEC 34-11).

## Frequency converter operation

All three-phase motors can be connected to a frequency converter. Depending on the frequency converter type, this may cause increased acoustic noise from the motor. Furthermore, it may cause the motor to be exposed to detrimental voltage peaks. As standard MG 71- and MG 80-based motors have no phase insulation and must therefore be protected against voltage peaks higher than 650 V (peak value) between the supply terminals.

**Note:** MG 71- and MG 80-based motors with phase insulation are available on request.


The above disturbances, i.e. both increased acoustic noise and detrimental voltage peaks, can be eliminated by fitting an LC filter between the frequency converter and the motor.

For further information, please contact the frequency converter supplier or Grundfos.

## Shaft seal

The shaft seal for the CM and CME pumps is of the O-ring type, which makes it very flexible when different types of O-rings and seal-face materials are needed. The shaft seal has a fixed seal driver which ensures a reliable rotation of all parts - even under the most extreme operating conditions.

Due to the special design of the shaft seal and the interfaces to the rest of the pump construction, the dry-running capabilities are improved significantly compared to most other similar shaft seals and pump types. Furthermore, improvements have been made to reduce the risk and effect of sticking. The shaft seal types available can be found in *Selection of shaft seal* on page 36 where the key parameters of selecting a shaft seal are also described.

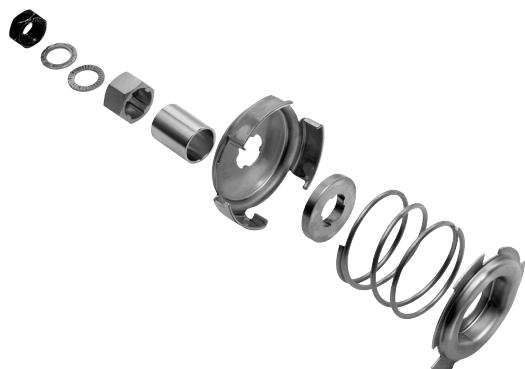

TM05 1131 2211

Fig. 16 Exploded view of shaft seal

**Note:** The available shaft seals for CM and CME pumps are very robust and durable, but dry running must always be avoided.


Details regarding operating conditions for the shaft seal can be found in *Operating range of the shaft seal* on page 19.

Further information about the shaft seal can be found in the separate data booklet covering shaft seals which can be downloaded from WebCAPS. See *Further product documentation* on page 129.

Title	Publication number
Shaft seals	96519875

**CM(E) 1-A**

(A = cast iron EN-GJL-200)

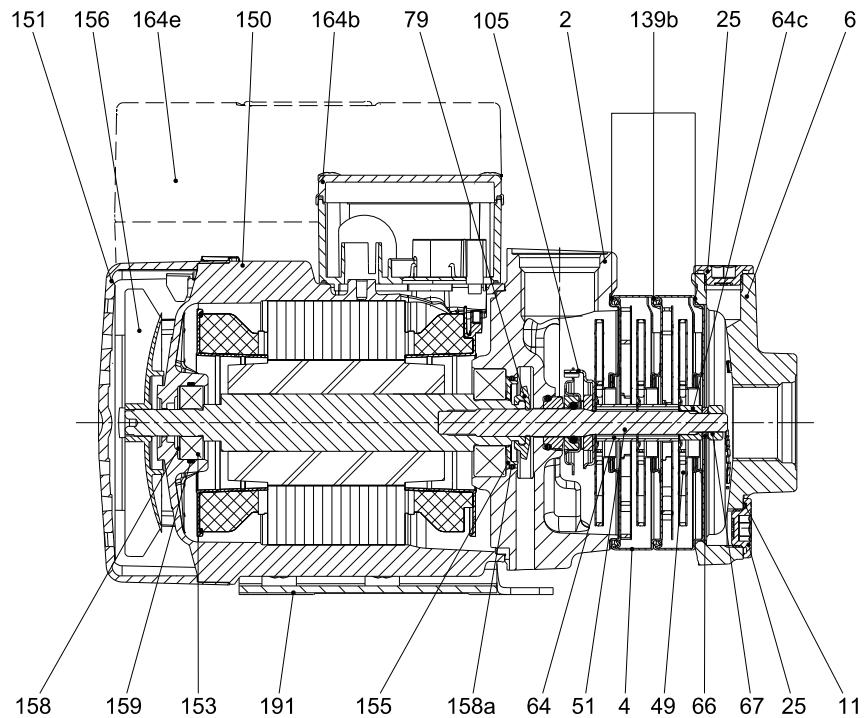**Sectional drawing**


TM04 3723 3809

**Fig. 17** CM(E) 1-3 with MG(E) 71 motor**Components**

<b>Pos.</b>	<b>Component</b>	<b>Pos.</b>	<b>Component</b>	<b>Pos.</b>	<b>Component</b>
2	Discharge part	64c	Clamp	153	Ball bearing
4	Chamber	66	Washer (NORD-LOCK®)	155	Bearing cover plate
6	Inlet part	67	Nut	156	Fan
11	O-ring	79	Diverting disc	158	Corrugated spring
25	Plug	105	Shaft seal	158a	O-ring
49	Impeller	139b	Gasket	159	O-ring
51	Pump shaft	150	Stator housing	164b, 164e	Terminal box
64	Spacing pipe	151	Fan cover	191	Base plate

**CM(E) 1-I and CM(E) 1-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

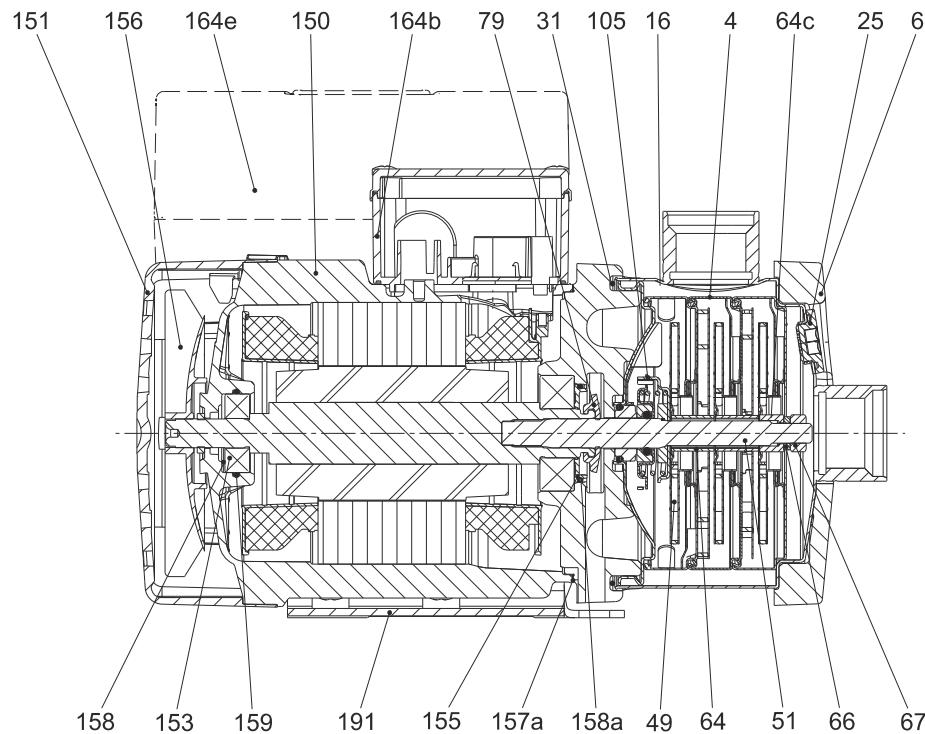**Sectional drawing**

TM04\_3722\_3809

**Fig. 18** CM(E) 1-3 with MG(E) 71 motor**Components**

<b>Pos.</b>	<b>Component</b>	<b>Pos.</b>	<b>Component</b>	<b>Pos.</b>	<b>Component</b>
4	Chamber	64c	Clamp	155	Bearing cover plate
6	Flange	66	Washer (NORD-LOCK®)	156	Fan
16	Sleeve	67	Nut	157a	Gasket
25	Plug	79	Diverting disc	158	Corrugated spring
31	O-ring	105	Shaft seal	158a	O-ring
49	Impeller	150	Stator housing	159	O-ring
51	Pump shaft	151	Fan cover	164b, 164e	Terminal box
64	Spacing pipe	153	Ball bearing	191	Base plate

## Material specification

Pos.	Description	Material	Pump material version					
			Cast iron (EN-GJL-200)		Stainless steel (EN 1.4301/AISI 304)		Stainless steel (EN 1.4401/AISI 316)	
			EN	ISO/AISI/ASTM	EN	ISO/AISI/ASTM	EN	ISO/AISI/ASTM
<b>Motor parts</b>								
156b	Motor flange	Cast iron						
150	Stator housing	Silumin (Alu)						
151	Fan cover	Composite PBT/PC						
153	Ball bearing							
156	Fan	Composite PA 66 30 % GF						
158	Corrugated spring	Steel						
164b	Terminal box, MG	Composite PC/ASA or						
164e	Terminal box, MGE	silumin (Alu)						
		Steel, electrocoated	1.0330.3		1.0330.3			
191	Base plate	Steel, powder-coated, 60 to 120 µ, NCS 7005					1.0330.3	
79	Diverting disc	Silicone fluid (LSR)						
155	Bearing cover plate	PPS						
<b>Pump parts</b>								
105	Shaft seal, steel parts	Stainless steel	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4401	AISI 316
	Shaft seal, seal faces	Al <sub>2</sub> O <sub>3</sub> /carbon or SiC						
51	Pump shaft	Stainless steel	1.4301	AISI 304	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4401	AISI 316
11 31 <sup>3)</sup> 158a 159	O-rings	EPDM, FKM or FFKM						
157a <sup>3)</sup>	Gasket	Paper						
139b <sup>4)</sup>	Gasket	Aramidé fibres (nbr)						
2 <sup>4)</sup>	Discharge part	Cast iron						
6 <sup>4)</sup>	Inlet part	Cast iron						
4	Chamber	Stainless steel	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4401	AISI 316
25	Plug	Stainless steel	1.4404	AISI 316L	1.4404	AISI 316L	1.4404	AISI 316L
49	Impeller	Stainless steel	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4301/ 1.4401 <sup>1)</sup>	AISI 304/ AISI 316 <sup>1)</sup>	1.4401	AISI 316
64	Spacing pipe	Stainless steel	1.4401	AISI 316	1.4401	AISI 316	1.4401	AISI 316
64c	Clamp	Stainless steel	STX2000 <sup>5)</sup>		STX2000 <sup>5)</sup>		STX2000 <sup>3)</sup>	
6 <sup>3)</sup>	Flange	Cast iron						
16	Sleeve	Stainless steel			1.4301/ 1.4401 <sup>1)</sup> + 2)	AISI 304/ AISI 316 <sup>1)</sup>	1.4401	AISI 316
67	Nut	Stainless steel A4						
66	Washer (NORD-LOCK®)	Steel	1.4547		1.4547		1.4547	

1) On request.

2) As standard, the pumps listed below are fitted with sleeves made of stainless steel 1.4401:

CM(E) 1-9 up to and including CM(E) 1-14  
CM(E) 3-9 up to and including CM(E) 3-14  
CM(E) 5-9 up to and including CM(E) 5-13  
CM(E) 10-6 up to and including CM(E) 10-8

3) Only in CM(E)-I/G pumps.

4) Only in CM(E)-A pumps.

5) STX2000 ~ CrNiMO 22 19 4.

## 10. CME pumps

### Communication with CME pumps

Communication with CME pumps is possible via

- a central building management system
- Grundfos GO Remote
- a control panel.

### Central building management system

The operator can communicate with a CME pump at a distance. Communication can take place via a central building management system allowing the operator to monitor and change control modes and setpoint settings.

The communication interface between the CME pump and central building management systems varies, depending on pump size.

### New-generation CME 0.37 to 2.2 kW


#### (supply voltages S, T, U)

This range of CME pumps can be fitted with a communication interface module (CIM). This means that no external communication interface is required.

### CME 0.37 to 7.5 kW

#### (supply voltages K, L, M, N, Q, R)

This range of CME pumps communicates via an external communication interface unit (CIU).

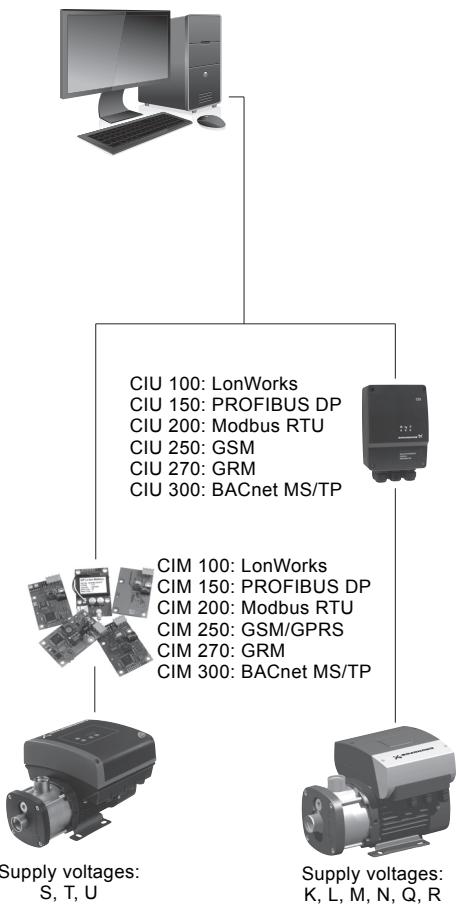

**Fig. 19** Communication via a central building management system


TM05 7520 1113

## Grundfos GO Remote

CME pumps can communicate with the Grundfos GO Remote via radio or infrared light.

The Grundfos GO Remote enables setting of functions and gives access to status overviews, technical product information and actual operating parameters.

The Grundfos GO Remote offers three different mobile interfaces (MI). See fig. 20.

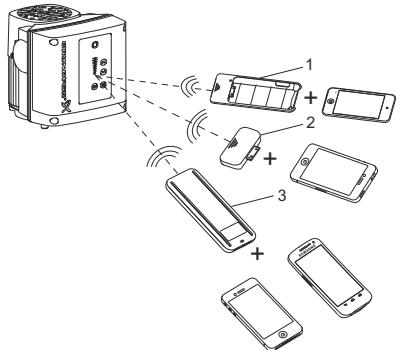

TM05 5383 4312

**Fig. 20** Grundfos GO Remote

Pos.	Description
1	Grundfos MI 201: Consists of an Apple iPod touch 4G and a Grundfos cover.
2	Grundfos MI 202: Add-on module which can be used in conjunction with Apple iPod touch 4, iPhone 4G or later.
2	Grundfos MI 204: Add-on module which can be used in conjunction with Apple iPod touch 5G or iPhone 5.
3	Grundfos MI 301: Separate module enabling radio or infrared communication. The module can be used in conjunction with an Android or iOS-based Smartphone with Bluetooth connection.

The Grundfos GO Remote is available as an accessory. See page 126.


## Control panel

The operator can change the setpoint settings manually on the control panel of the CME pump terminal box.

The design and functionality of the control panels vary, depending on the MGE motor fitted to the CME pump.

The control panel of the new-generation CME pumps enables radio communication. The Grundfos Eye at the top of the control panel is a pump status indicator light providing information about the pump operating status. Less or more advanced control panels are available on request.

New-generation CME with supply voltages S, T, U

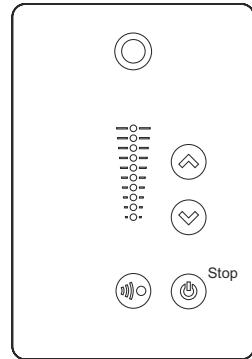

CME with supply voltages K, L, M, N, Q, R



TM05 5382 3612

TM00 7600 0404

**Fig. 21** Standard control panels of CME pumps

## Speed control of CME pumps

### Affinity equations

Normally, CME pumps are used in applications characterised by a variable flow. Consequently, it is not possible to select a pump that is constantly operating at its optimum efficiency.

In order to achieve optimum operating economy, the duty point should be close to the optimum efficiency (eta) for most operating hours.

Between the min. and max. performance curves, CME pumps have an infinite number of performance curves, each representing a specific speed. It may therefore not be possible to select a duty point close to the max. curve.

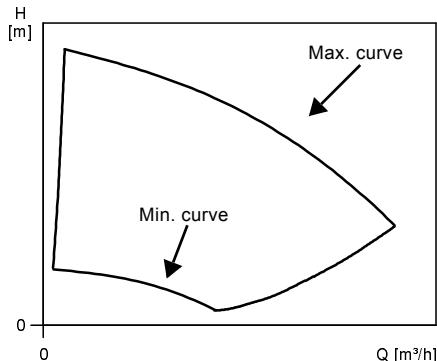


Fig. 22 Min. and max. performance curves

In situations where it is not possible to select a duty point close to the max. curve, use the affinity equations below. The head (H), the flow rate (Q) and the input power (P) are the appropriate variables for calculating the motor speed (n).

**Note:** The approximated formulas apply on condition that the system characteristic remains unchanged for  $n_n$  and  $n_x$  and that it is based on the formula  $H = k \times Q^2$  where k is a constant.

The power equation implies that the pump efficiency is unchanged at the two speeds. In practice, this is not quite correct.

Finally, it is worth noting that the efficiency of the frequency converter and the motor must be taken into account if a precise calculation of the power saving resulting from a reduction of the pump speed is wanted.

TMO149164803

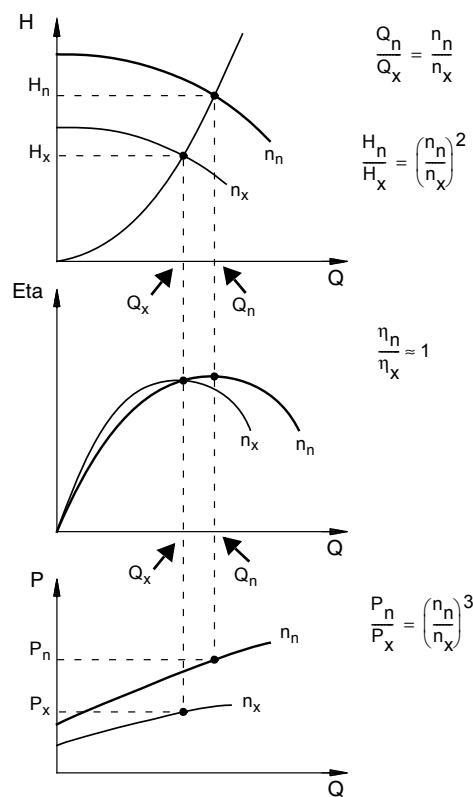


Fig. 23 Affinity equations

### Legend

$H_n$	Rated head [m]
$H_x$	Current head [m]
$Q_n$	Rated flow rate [ $m^3/h$ ]
$Q_x$	Current flow rate [ $m^3/h$ ]
$n_n$	Rated motor speed [ $min^{-1}$ ]
$n_x$	Current motor speed [ $min^{-1}$ ]
$\eta_n$	Rated efficiency [%]
$\eta_x$	Current efficiency [%].

### WinCAPS and WebCAPS

WinCAPS and WebCAPS are selection programs offered by Grundfos.

The two programs make it possible to calculate the specific duty point and energy consumption of a CME pump.

When you enter the dimensions of the pump, WinCAPS and WebCAPS can calculate the exact duty point and energy consumption. For further information, see page 129.

TM00 8720 3496

## 11. Grundfos CUE

### CM pumps connected to Grundfos CUE, external frequency converters



GIA4404

**Fig. 24** Grundfos CUE product range

Grundfos CUE is a complete range of frequency converters for pump control in a wide range of applications. Grundfos CUE is designed for wall mounting.

Grundfos CUE provides a variety of benefits to the end-user.

The benefits include

- Grundfos CME pump functionality and user interface
- application- and pump family-related functions
- increased comfort compared to mains-operated pump solutions
- simple installation and commissioning compared to standard frequency converters.

#### Functions

##### Intuitive startup guide

The startup guide enables easy installation and commissioning as well as plug-and-pump convenience. Few settings need to be made by the installer as the rest is done automatically or preset from the factory.

##### Smart user interface

**Fig. 25** Grundfos CUE control panel

Grundfos CUE features a unique user-friendly control panel with graphic display and easy-to-use buttons. Panel layout resembles the well-known Grundfos R100 remote control, which is used with Grundfos CME pumps.

##### Controlling the value you choose

Grundfos CUE has a built-in PI controller offering closed-loop control of a desired value.

The values include

- constant differential pressure
- proportional pressure
- constant temperature
- constant flow.

##### Wide product range

The CUE product range is quite comprehensive, covering five different voltage ranges, enclosure classes IP20/21 (NEMA 1) and IP54/55 (NEMA 12), and a wide range of output powers.

The table below provides a general overview.

Input voltage [V]	Output voltage [V]	Motor [kW]
1 x 200-240	3 x 200-240	1.1 - 7.5
3 x 200-240	3 x 200-240	0.75 - 45
3 x 380-500	3 x 380-500	0.55 - 250
3 x 525-600	3 x 525-600	0.75 - 7.5

## 12. Approvals and markings

### Approvals

C-tick mark, New Zealand and Australian EMC.

TR certificate.

### cULus

The cULus approval covers the following supply voltages:

- 1 x 115/230 V, 60 Hz (supply voltage B)
- 3 x 208-230/440-480 V, 60 Hz (supply voltage E)
- 3 x 575 V, 60 Hz (supply voltage H)
- 1 x 115/230 V, 60 Hz (supply voltage B1)
- 3 x 208-230/440-480 V, 60 Hz (supply voltage E1)
- 3 x 400 V, 50/60 Hz (supply voltage I)
- 3 x 380-415 V, 50 Hz/3 x 440-480 V, 60 Hz (supply voltage J).

### Pumps

UL778 and C22.2 No 108-01

NEMA 250 (IP code).

### Overheating protection

UL2111 and C22.2 No 77-95.

**Note:** cULus/cURus-approved motors have no internal protection. Motors fitted with PTC/PTO have no cULus/cURus approval.

### cURus motors

CME motors comply with UL508C and C22.2 No 14.

The cURus approval covers the following supply voltages:

- 3 x 380-480 V, 50/60 Hz (supply voltage L)
- 3 x 460-480 V, 60 Hz (supply voltage N)
- 1 x 208-230 V, 50/60 Hz (supply voltage M)
- 3 x 208-230 V, 50/60 Hz (supply voltage Q)
- 3 x 200-460 V, 60 Hz (supply voltage G)
- 1 x 115-230 V, 60 Hz (supply voltage B)
- 1 x 200-240 V, 50/60 Hz (supply voltage K)
- 3 x 380-500 V, 50/60 Hz (supply voltage S)
- 3 x 440-480 V, 50/60 Hz (supply voltage T)
- 1 x 200-230 V, 50/60 Hz (supply voltage U).

### Other approvals and compliance with directives

- GOST (Russia)
- Compliance with RoHS, directive 2002/96/EC
- CCC
- CEL
- EuP.

### Drinking water approvals

- WRAS
- ACS
- NSF61.

### Markings



C-tick



CE



cULus



cURus



UL



TR



ccc

## 13. Certificates

Certificate	Description
Certificate of compliance with the order	According to EN 10204, 2.1. Grundfos document certifying that the pump supplied is in compliance with the order specifications.
Test certificate. Non-specific inspection and testing	According to EN 10204, 2.2. Certificate with inspection and test results of a non-specific pump.
Inspection certificate 3.1	Grundfos document certifying that the pump supplied is in compliance with the order specifications. Inspection and test results are mentioned in the certificate.
Inspection certificate	Grundfos document certifying that the pump supplied is in compliance with the order specifications. Inspection and test results are mentioned in the certificate. Certificate from the surveyor is included. We offer the following inspection certificates: <ul style="list-style-type: none"><li>• Lloyds Register of Shipping (LRS)</li><li>• Det Norske Veritas (DNV)</li><li>• Germanischer Lloyd (GL)</li><li>• Bureau Veritas (BV)</li><li>• American Bureau of Shipping (ABS)</li><li>• Registro Italiano Navale Agenture (RINA)</li><li>• China Classification Society (CCS)</li><li>• Russian maritime register of Shipping (RS)</li><li>• Biro Klassifikasjio Indonesia (BKI)</li><li>• United States Coast Guard (USCG)</li><li>• Nippon Kaiji Koykai (NKK)</li></ul>
Standard test report	Certifies that the main components of the specific pump are manufactured by Grundfos, and that the pump has been QH-tested, inspected and conforms to the full requirements of the appropriate catalogues, drawings and specifications.
Material specification report	Certifies the material used for the main components of the specific pump.
Material specification report with certificate from raw material supplier	Certifies the material used for the main components of the specific pump. A material certificate, EN 10204, 3.1, will be supplied for each main component.
Duty-point verification report	Certifies a test point specified by the customer. Issued according to ISO 9906:1999 concerning "Duty point verification".
Surface-roughness	Shows the measured roughness of the cast pump base of the specific pump. The report indicates the values measured at the base inlet and outlet according to ISO 1302.
Vibration report	Vibration report indicating the values measured during the performance test of the specific pump according to ISO 10816.
Motor test report	Shows the performance test of the specific motor, including power output, current, temperature, stator windings resistance and insulation test.
Cleaned and dried pump	Confirms that the specific pump has been cleaned and dried, and how it was done.
Electro-polished pump	Confirms that the specific pump has been electro-polished. The maximum surface roughness is specified in the report.

Examples of the certificates are shown on pages 32 and 33.

**Note:** Other certificates are available on request.

## Examples of certificates

### Certificate of compliance with the order

BE > THINK > INNOVATE >		GRUNDFOS X										
<b>Certificate of compliance with the order</b>												
EN 10204 2.1												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Customer name</td><td></td></tr> <tr><td>Customer order no.</td><td></td></tr> <tr><td>Customer Tag no.</td><td></td></tr> <tr><td>GRUNDFOS order no.</td><td></td></tr> <tr><td>Product type</td><td></td></tr> </table>			Customer name		Customer order no.		Customer Tag no.		GRUNDFOS order no.		Product type	
Customer name												
Customer order no.												
Customer Tag no.												
GRUNDFOS order no.												
Product type												
<p>We the undersigned hereby guarantee and certify that the materials and/or parts for the above mentioned product were manufactured, tested, inspected, and conform to the full requirements of the appropriate catalogues, drawings and/or specifications relative thereto.</p>												
<b>GRUNDFOS</b> Date: Signature: Name: Dept.: <small>Part no. 96 50 78 95/1001002</small>												

### Test certificate

BE > THINK > INNOVATE >		GRUNDFOS X																				
<b>Test certificate</b>																						
Non-specific inspection and testing																						
EN 10204 2.2																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Customer name</td><td></td></tr> <tr><td>Customer order no.</td><td></td></tr> <tr><td>Customer Tag no.</td><td></td></tr> <tr><td>GRUNDFOS order no.</td><td></td></tr> </table>			Customer name		Customer order no.		Customer Tag no.		GRUNDFOS order no.													
Customer name																						
Customer order no.																						
Customer Tag no.																						
GRUNDFOS order no.																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Pump</td><td></td></tr> <tr><td>Pump type</td><td></td></tr> <tr><td>Motor make</td><td></td></tr> <tr><td>Flow</td><td>m³/h</td></tr> <tr><td>Head</td><td>m</td></tr> <tr><td>Power P2</td><td>kW</td></tr> <tr><td>Voltage</td><td>V</td></tr> <tr><td>Frequency</td><td>Hz</td></tr> <tr><td>Full load current</td><td>A</td></tr> <tr><td>Motor speed</td><td>min⁻¹</td></tr> </table>			Pump		Pump type		Motor make		Flow	m³/h	Head	m	Power P2	kW	Voltage	V	Frequency	Hz	Full load current	A	Motor speed	min⁻¹
Pump																						
Pump type																						
Motor make																						
Flow	m³/h																					
Head	m																					
Power P2	kW																					
Voltage	V																					
Frequency	Hz																					
Full load current	A																					
Motor speed	min⁻¹																					
<p>We the undersigned hereby guarantee and certify that the materials and/or parts for the above mentioned product were manufactured, tested, inspected, and conform to the full requirements of the appropriate catalogues, drawings and / or specifications relative thereto.</p>																						
<b>GRUNDFOS</b> Date: Signature: Name: Dept.: <small>Part no 96 50 78 96/1001002</small>																						

### Inspection certificate 3.1

BE > THINK > INNOVATE >		GRUNDFOS X																																												
<b>Inspection certificate.</b>																																														
EN 10204 3.1																																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td></td></tr> <tr><td>GRUNDFOS order no.</td><td></td></tr> <tr><td>GRUNDFOS DUT id.</td><td></td></tr> <tr><td>Customer order no.</td><td></td></tr> <tr><td>Customer name and address</td><td></td></tr> <tr><td>Shipyard / factory</td><td></td></tr> <tr><td>Ship / new building</td><td></td></tr> <tr><td>Customer TAG no.</td><td></td></tr> <tr><td>Classifying society</td><td>GRUNDFOS authorized department</td></tr> </table>			Manufactured by		GRUNDFOS order no.		GRUNDFOS DUT id.		Customer order no.		Customer name and address		Shipyard / factory		Ship / new building		Customer TAG no.		Classifying society	GRUNDFOS authorized department																										
Manufactured by																																														
GRUNDFOS order no.																																														
GRUNDFOS DUT id.																																														
Customer order no.																																														
Customer name and address																																														
Shipyard / factory																																														
Ship / new building																																														
Customer TAG no.																																														
Classifying society	GRUNDFOS authorized department																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2"><b>Pump</b></td><td colspan="2"><b>Motor</b></td></tr> <tr><td>Pump type</td><td></td><td>Make</td><td></td></tr> <tr><td>Part number</td><td></td><td>Part number</td><td></td></tr> <tr><td>Serial no.</td><td></td><td>Serial No.</td><td></td></tr> <tr><td>Flow rate (m³/h)</td><td></td><td>P2 (kW)</td><td></td></tr> <tr><td>Head (m)</td><td></td><td>Voltage (V)</td><td></td></tr> <tr><td>Max. ope. P/t (bar / °C)</td><td></td><td>Current (A)</td><td></td></tr> <tr><td>Din / W. - No.</td><td></td><td>n(min⁻¹)</td><td></td></tr> <tr><td>Base/Pump head cover</td><td></td><td>Frequency (Hz)</td><td></td></tr> <tr><td>Impeller/guidevanes</td><td></td><td>Insulation class</td><td></td></tr> <tr><td>Shaft/sleeve</td><td></td><td>Power factor</td><td></td></tr> </table>			<b>Pump</b>		<b>Motor</b>		Pump type		Make		Part number		Part number		Serial no.		Serial No.		Flow rate (m³/h)		P2 (kW)		Head (m)		Voltage (V)		Max. ope. P/t (bar / °C)		Current (A)		Din / W. - No.		n(min⁻¹)		Base/Pump head cover		Frequency (Hz)		Impeller/guidevanes		Insulation class		Shaft/sleeve		Power factor	
<b>Pump</b>		<b>Motor</b>																																												
Pump type		Make																																												
Part number		Part number																																												
Serial no.		Serial No.																																												
Flow rate (m³/h)		P2 (kW)																																												
Head (m)		Voltage (V)																																												
Max. ope. P/t (bar / °C)		Current (A)																																												
Din / W. - No.		n(min⁻¹)																																												
Base/Pump head cover		Frequency (Hz)																																												
Impeller/guidevanes		Insulation class																																												
Shaft/sleeve		Power factor																																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2"><b>Customer's requirements</b></td></tr> <tr><td>Flow rate (m³/h)</td><td></td><tr><td>Head (m)</td><td></td></tr> </tr></table>			<b>Customer's requirements</b>		Flow rate (m³/h)		Head (m)																																							
<b>Customer's requirements</b>																																														
Flow rate (m³/h)		Head (m)																																												
Head (m)																																														
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="6"><b>Test result ref. requirements</b></td></tr> <tr><td>Q(m³/h)</td><td>H(m)</td><td>n(min⁻¹)</td><td>I(A)</td><td>P1(kW)</td><td></td></tr> </table>			<b>Test result ref. requirements</b>						Q(m³/h)	H(m)	n(min⁻¹)	I(A)	P1(kW)																																	
<b>Test result ref. requirements</b>																																														
Q(m³/h)	H(m)	n(min⁻¹)	I(A)	P1(kW)																																										
<p>Hydrostatic test   Bar – no leaks or deformation observed</p>																																														
<b>GRUNDFOS</b> Date: Signature: Name: Dept.: <small>Part no. 96 50 78 97/1014142</small>																																														

### Inspection certificate

BE > THINK > INNOVATE >		GRUNDFOS X																																																
<b>Inspection certificate.</b>																																																		
Russian Maritime Register of Shipping																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Manufactured by</td><td></td></tr> <tr><td>GRUNDFOS order no.</td><td></td></tr> <tr><td>GRUNDFOS DUT id.</td><td></td></tr> <tr><td>Customer order no.</td><td></td></tr> <tr><td>Customer name and address</td><td></td></tr> <tr><td>Shipyard / factory</td><td></td></tr> <tr><td>Ship / new building</td><td></td></tr> <tr><td>Customer TAG no.</td><td></td></tr> <tr><td>Classifying society</td><td>Russian Maritime Register of Shipping ( RS )</td></tr> </table>			Manufactured by		GRUNDFOS order no.		GRUNDFOS DUT id.		Customer order no.		Customer name and address		Shipyard / factory		Ship / new building		Customer TAG no.		Classifying society	Russian Maritime Register of Shipping ( RS )																														
Manufactured by																																																		
GRUNDFOS order no.																																																		
GRUNDFOS DUT id.																																																		
Customer order no.																																																		
Customer name and address																																																		
Shipyard / factory																																																		
Ship / new building																																																		
Customer TAG no.																																																		
Classifying society	Russian Maritime Register of Shipping ( RS )																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2"><b>Pump</b></td><td colspan="2"><b>Motor</b></td></tr> <tr><td>Pump type</td><td></td><td>Make</td><td></td></tr> <tr><td>Part number</td><td></td><td>Part number</td><td></td></tr> <tr><td>Serial no.</td><td></td><td>Serial No.</td><td></td></tr> <tr><td>Flow rate (m³/h)</td><td></td><td>P2 (kW)</td><td></td></tr> <tr><td>Head (m)</td><td></td><td>Voltage (V)</td><td></td></tr> <tr><td>Max. ope. P/t (bar / °C)</td><td></td><td>Current (A)</td><td></td></tr> <tr><td>Service</td><td></td><td>n(min⁻¹)</td><td></td></tr> <tr><td>Medium</td><td>Din / W. - No.</td><td>Frequency (Hz)</td><td></td></tr> <tr><td>Base/Pump head cover</td><td></td><td>Insulation class</td><td></td></tr> <tr><td>Impeller/guidevanes</td><td></td><td>Power factor</td><td></td></tr> <tr><td>Shaft/sleeve</td><td></td><td></td><td></td></tr> </table>			<b>Pump</b>		<b>Motor</b>		Pump type		Make		Part number		Part number		Serial no.		Serial No.		Flow rate (m³/h)		P2 (kW)		Head (m)		Voltage (V)		Max. ope. P/t (bar / °C)		Current (A)		Service		n(min⁻¹)		Medium	Din / W. - No.	Frequency (Hz)		Base/Pump head cover		Insulation class		Impeller/guidevanes		Power factor		Shaft/sleeve			
<b>Pump</b>		<b>Motor</b>																																																
Pump type		Make																																																
Part number		Part number																																																
Serial no.		Serial No.																																																
Flow rate (m³/h)		P2 (kW)																																																
Head (m)		Voltage (V)																																																
Max. ope. P/t (bar / °C)		Current (A)																																																
Service		n(min⁻¹)																																																
Medium	Din / W. - No.	Frequency (Hz)																																																
Base/Pump head cover		Insulation class																																																
Impeller/guidevanes		Power factor																																																
Shaft/sleeve																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2"><b>Customer's requirements</b></td></tr> <tr><td>Flow rate (m³/h)</td><td></td><tr><td>Head (m)</td><td></td></tr> </tr></table>			<b>Customer's requirements</b>		Flow rate (m³/h)		Head (m)																																											
<b>Customer's requirements</b>																																																		
Flow rate (m³/h)		Head (m)																																																
Head (m)																																																		
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="6"><b>Test result ref. requirements</b></td></tr> <tr><td>Q(m³/h)</td><td>H(m)</td><td>n(min⁻¹)</td><td>I(A)</td><td>P1(kW)</td><td></td></tr> </table>			<b>Test result ref. requirements</b>						Q(m³/h)	H(m)	n(min⁻¹)	I(A)	P1(kW)																																					
<b>Test result ref. requirements</b>																																																		
Q(m³/h)	H(m)	n(min⁻¹)	I(A)	P1(kW)																																														
<p>Hydrostatic test   Bar – no leaks or deformation observed</p>																																																		
<p>The pump has been marked  </p>																																																		
Surveyor signature: _____ GRUNDFOS Tested date: _____ Date: Signature: Name: Dept.: <small>Part no. 96 50 79 25/1014142</small>																																																		

**Standard test report**

**GRUNDFOS**

BE > THINK > INNOVATE	
GRUNDFOS	
<b>Standard test report</b>	
Customer name	
Customer order no.	
Customer Tag no.	
GRUNDFOS order no.	
Product type	
GRUNDFOS DUT id.	
Part number	

We the undersigned hereby guarantee and certify that the materials and/or parts for the above mentioned product were manufactured by GRUNDFOS, tested, inspected, and conform to the full requirements of the appropriate catalogues, drawings and/or specifications relative thereto.  
The attached test result is from the above mentioned pump.

GRUNDFOS  
Date:  
Signature:  
Name:  
Dept:

Part no. 96 50 79 80 P01 /A72775

**Material specification report**

**GRUNDFOS**

BE > THINK > INNOVATE	
GRUNDFOS	
<b>Material specification report.</b>	
Customer name	
Customer order no.	
Customer Tag no.	
GRUNDFOS order no.	
Pump type	
GRUNDFOS DUT id.	
Part number	
Production code	

Pump	Materials	DIN W.-Nr.	AISI / ASTM
Pump head			
Pump head cover			
Shaft			
Impeller			
Chamber			
Outer sleeve			
Base			

We the undersigned hereby guarantee and certify that the materials and/or parts for the above mentioned product were manufactured, tested, inspected, and conform to the full requirements of the appropriate catalogues, drawings and/or specifications relative thereto.

GRUNDFOS  
Date:  
Signature:  
Name:  
Dept:

Part no 96 50 79 28/A72775

TM03 4143 1706

TM03 4150 1706

**Material specification report with certificate from raw material supplier**

**GRUNDFOS**

BE > THINK > INNOVATE	
GRUNDFOS	
<b>Material specification report with EN10204 3.1 material certificate from raw material supplier</b>	
Customer name	
Customer order no.	
Customer Tag no.	
GRUNDFOS order no.	
Pump type	
GRUNDFOS DUT id.	
Part number	
Production code	

Pump	Raw materiel no.	Supplier certificate no.
Pump head		
Pump head cover		
Shaft		
Impeller		
Chamber		
Outer sleeve		
Base		

We the undersigned hereby guarantee and certify that the materials and/or parts for the above mentioned product were manufactured, tested, inspected, and conform to the full requirements of the appropriate catalogues, drawings and/or specifications relative thereto.

GRUNDFOS  
Date:  
Signature:  
Name:  
Dept:

Part no 96 50 79 29/A72775

TM03 4149 3607

TM03 4148 1706

**Duty-point verification report**

**GRUNDFOS**

BE > THINK > INNOVATE	
GRUNDFOS	
<b>Duty point verification report</b>	
Customer name	
Customer order no.	
Customer Tag no.	
GRUNDFOS order no.	
Product type	
GRUNDFOS DUT id.	
Part number	

We the undersigned hereby guarantee and certify that the materials and/or parts for the above mentioned product were manufactured by GRUNDFOS, tested, inspected, and conform to the full requirements of the appropriate catalogues, drawings and/or specifications relative thereto.

GRUNDFOS  
Date:  
Signature:  
Name:  
Dept:

Part no. 96 53 96 99 /A72775

## 14. Selection and sizing

### Selection of pumps

Selection of pumps should be based on these elements:

- the duty point of the pump (see below)
- dimensional data such as pressure loss as a result of height differences, friction loss in the pipework, pump efficiency, etc. (see below)
- pump materials (see page 35)
- pump connections (see page 35)
- shaft seal (see page 36).

#### Duty point of the pump

From a duty point it is possible to select a pump on the basis of the curve charts starting on page 38.

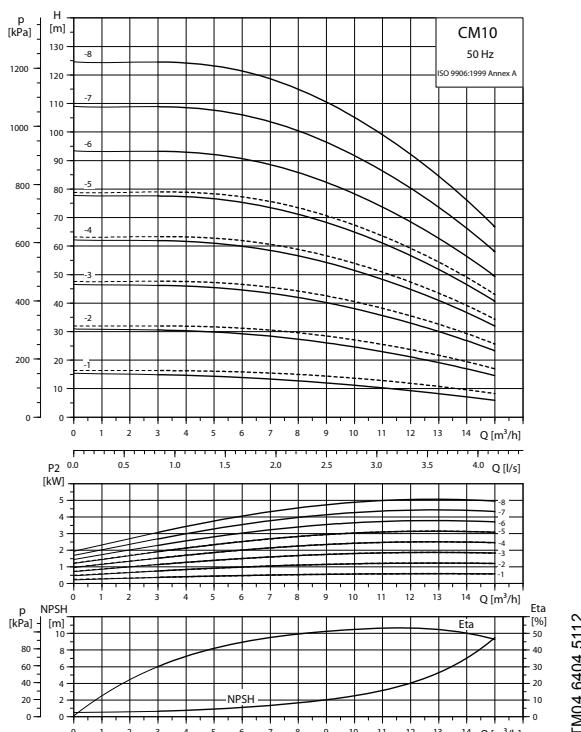


Fig. 26 Example of a curve chart

### Dimensional data

When sizing a pump, take the following factors into account:

- Required flow and pressure at the draw-off point.
- Pressure loss as a result of height differences ( $H_{geo}$ ).
- Friction loss in the pipework ( $H_f$ ). It may be necessary to account for pressure loss in connection with long pipes, bends or valves, etc.
- Best efficiency at the estimated duty point.\*
- NPSH value. For calculation of the NPSH value, see *Minimum inlet pressure, NPSH* on page 20.

\* See *Selection of CME pumps* on page 36 for further information about sizing CME pumps.

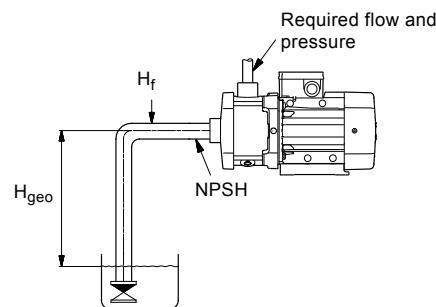


Fig. 27 Dimensional data

TM04 3496 4508

### Pump efficiency

When sizing the pump, the efficiency (eta) should be considered so that the pump will operate at or near its maximum efficiency, for instance on the right-hand side in the curve example in fig. 28.


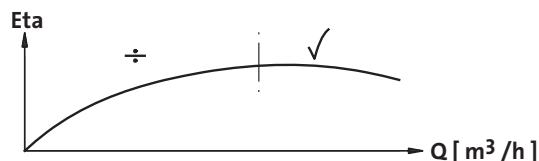


Fig. 28 Best efficiency

TM00 9190 1303

Before determining the best efficiency point, the operation pattern of the pump needs to be identified. If the pump is expected to operate at the same duty point, then select a CM pump which is operating at a duty point corresponding with the best efficiency of the pump. The example in fig. 29 shows how to check the pump efficiency when selecting a CM pump.

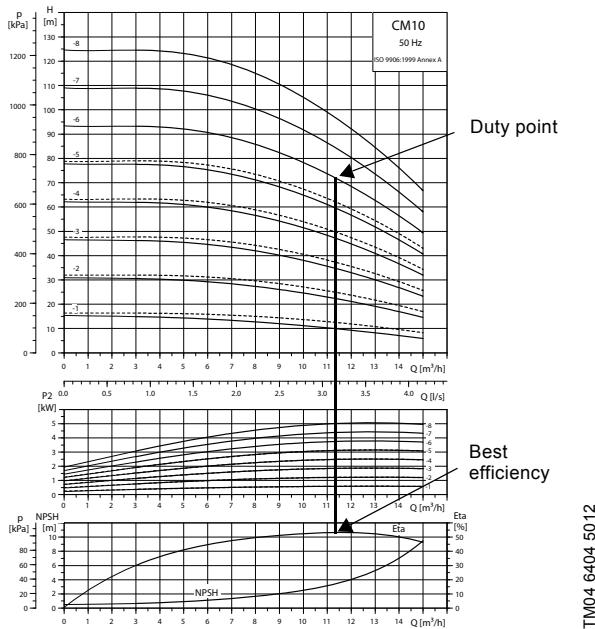

**Fig. 29** Example of a CM pump's duty point

## Pump materials


Select the material variant on the basis of the liquid to be pumped. The table below gives a general recommendation regarding selection of pump material.

Liquid to be pumped	Material in contact with pump media	Pump type
Clean, non-aggressive liquids such as potable water and oils	Cast iron* (EN-GJL-200)	CM(E)-A
Industrial liquids and acids	Stainless steel (EN 1.4301/AISI 304)	CM(E)-I
	Stainless steel (EN 1.4401/AISI 316)	CM(E)-G

\* The impeller, chamber and filling plugs are made of stainless steel (EN 1.4301/AISI 304).  
The pump shaft is made of stainless steel (EN 1.4301/AISI 316).

Contact Grundfos for more specific selection based on the pumped liquid.

## Pump connections

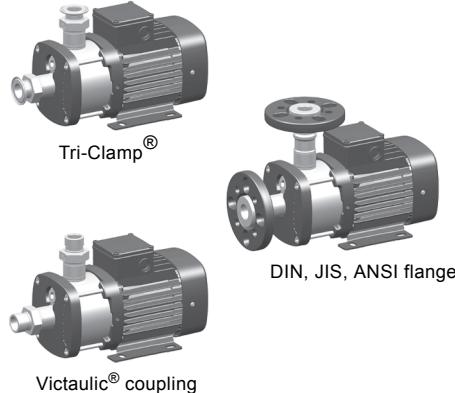

TM04 3937 0409

**Fig. 30** Examples of pump connections

Selection of pump connection depends on the rated pressure and pipework. To meet any requirement, the CM and CME pumps offer a wide range of flexible connections such as:

- Tri-Clamp®
- DIN flange
- ANSI flange
- JIS flange
- Victaulic® coupling
- Whitworth thread Rp
- internal NPT thread.

## Selection of shaft seal

As standard, the CM and CME pumps are fitted with a Grundfos O-ring type shaft seal with fixed driver suitable for the most common applications.



TM04 3034 0409

**Fig. 31** Shaft seal (O-ring type with fixed driver)

The table below shows the available shaft seal types for CM and CME pumps.

Pump type	Shaft seal type	Material	Rubber parts
CM, CME	AQQE	Stainless steel	EPDM (E)
	AQQV		FKM (V)
	AQQK		FFKM (K)
	AQBE		
	AQBV		
	AVBE		
	AVBV		

These key parameters must be taken into account when selecting the shaft seal:

- type of pumped liquid
- liquid temperature
- maximum pressure.

Use the curve in fig. 13 on page 19 to select a suitable shaft seal.

**Note:** The list should be applied with some caution, as factors such as concentration of the pumped liquid, liquid temperature or pressure may affect the chemical resistance of a specific pump version.

## Selection of CME pumps

CME pumps are normally used in applications characterised by a variable flow. Consequently, it is not possible to select a pump that is constantly operating at its optimum efficiency. In order to achieve optimum operating economy, the duty point should therefore be close to the optimum efficiency (*eta*) for most operating hours. For further information, see *CME pumps* on page 26.

**Note:** Irrespective of the input frequency, the 100 % speed of CME pumps is approximately  $3400 \text{ min}^{-1}$ .

See CME performance curves on pages 50 to 55.

## 15. How to read the curve charts

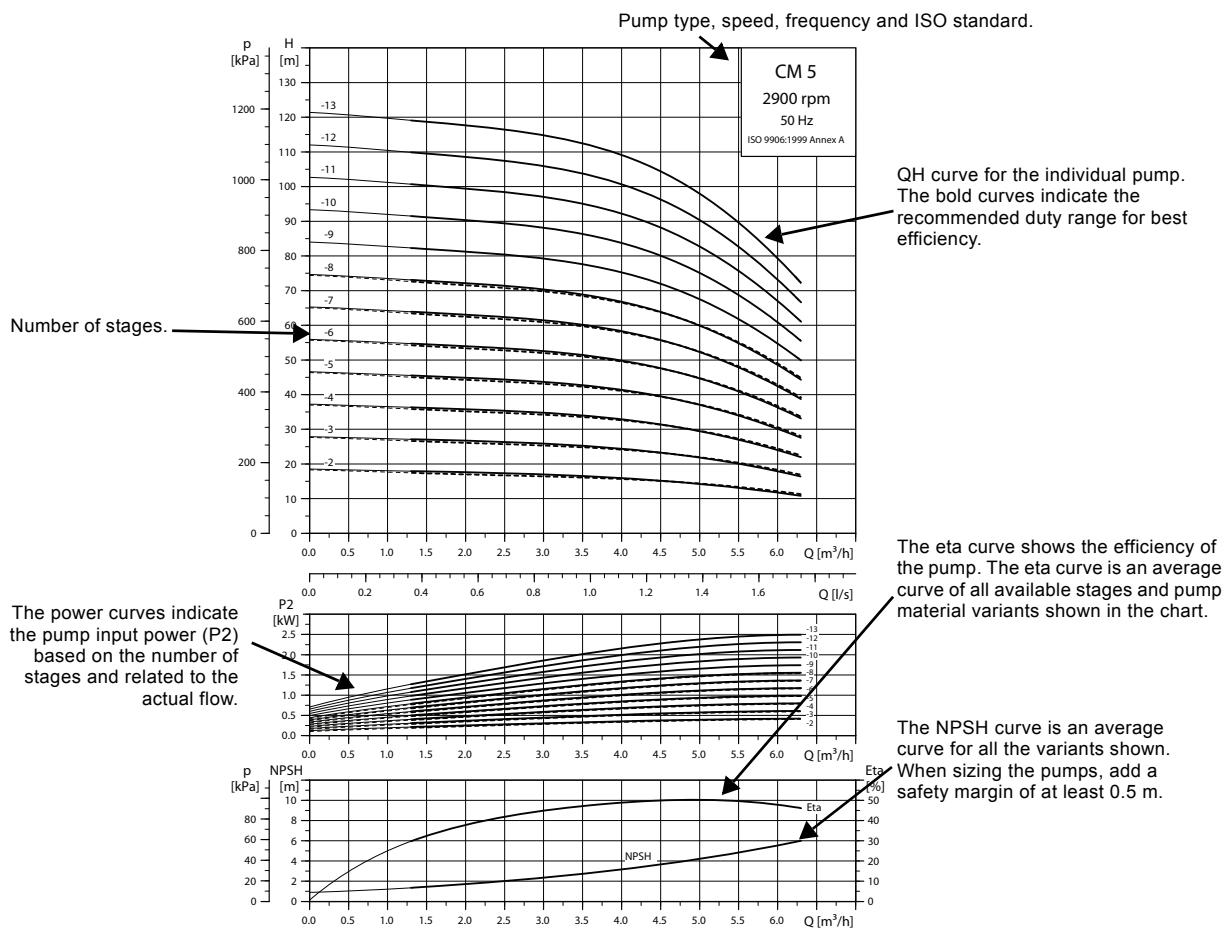


Fig. 32 How to read the curve charts

### Guidelines for performance curves

The guidelines below apply to the curves shown on the following pages:

- Tolerances to ISO 9906:1999, Annex A, if indicated.
  - Measurements have been made with airless water at a temperature of +20 °C.
  - The curves apply to the following kinematic viscosity:  $\nu = 1 \text{ mm}^2/\text{s}$  (1 cSt).
  - The QH curves apply to fixed speeds of 2900 min<sup>-1</sup> (50 Hz) and 3480 min<sup>-1</sup> (60 Hz).
- Note:** The actual speed will in most cases deviate from the above-mentioned speeds. So for realistic curves, please refer to WebCAPS where the pump curves include the characteristics of the selected motor and therefore show curves at actual speeds. In WebCAPS, it is also possible to adjust the curves depending on the density and viscosity.
- The conversion between head  $H$  (m) and pressure  $p$  (kPa) applies to a water density of  $\rho = 1000 \text{ kg/m}^3$ .

- Due to the risk of overheating, the pumps should not be used at a flow below the minimum flow rate. The curve in fig. 33 shows the minimum flow rate as a percentage of the rated flow rate in relation to the liquid temperature.



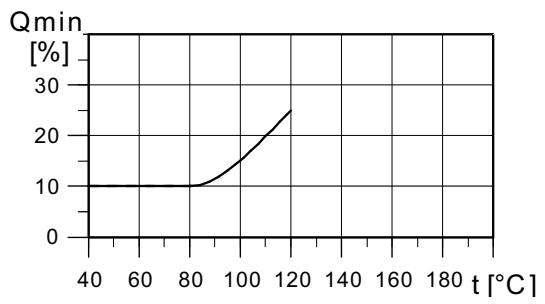


Fig. 33 Minimum flow rate

## 16. Performance curves, CM 50 Hz


**CM 1**

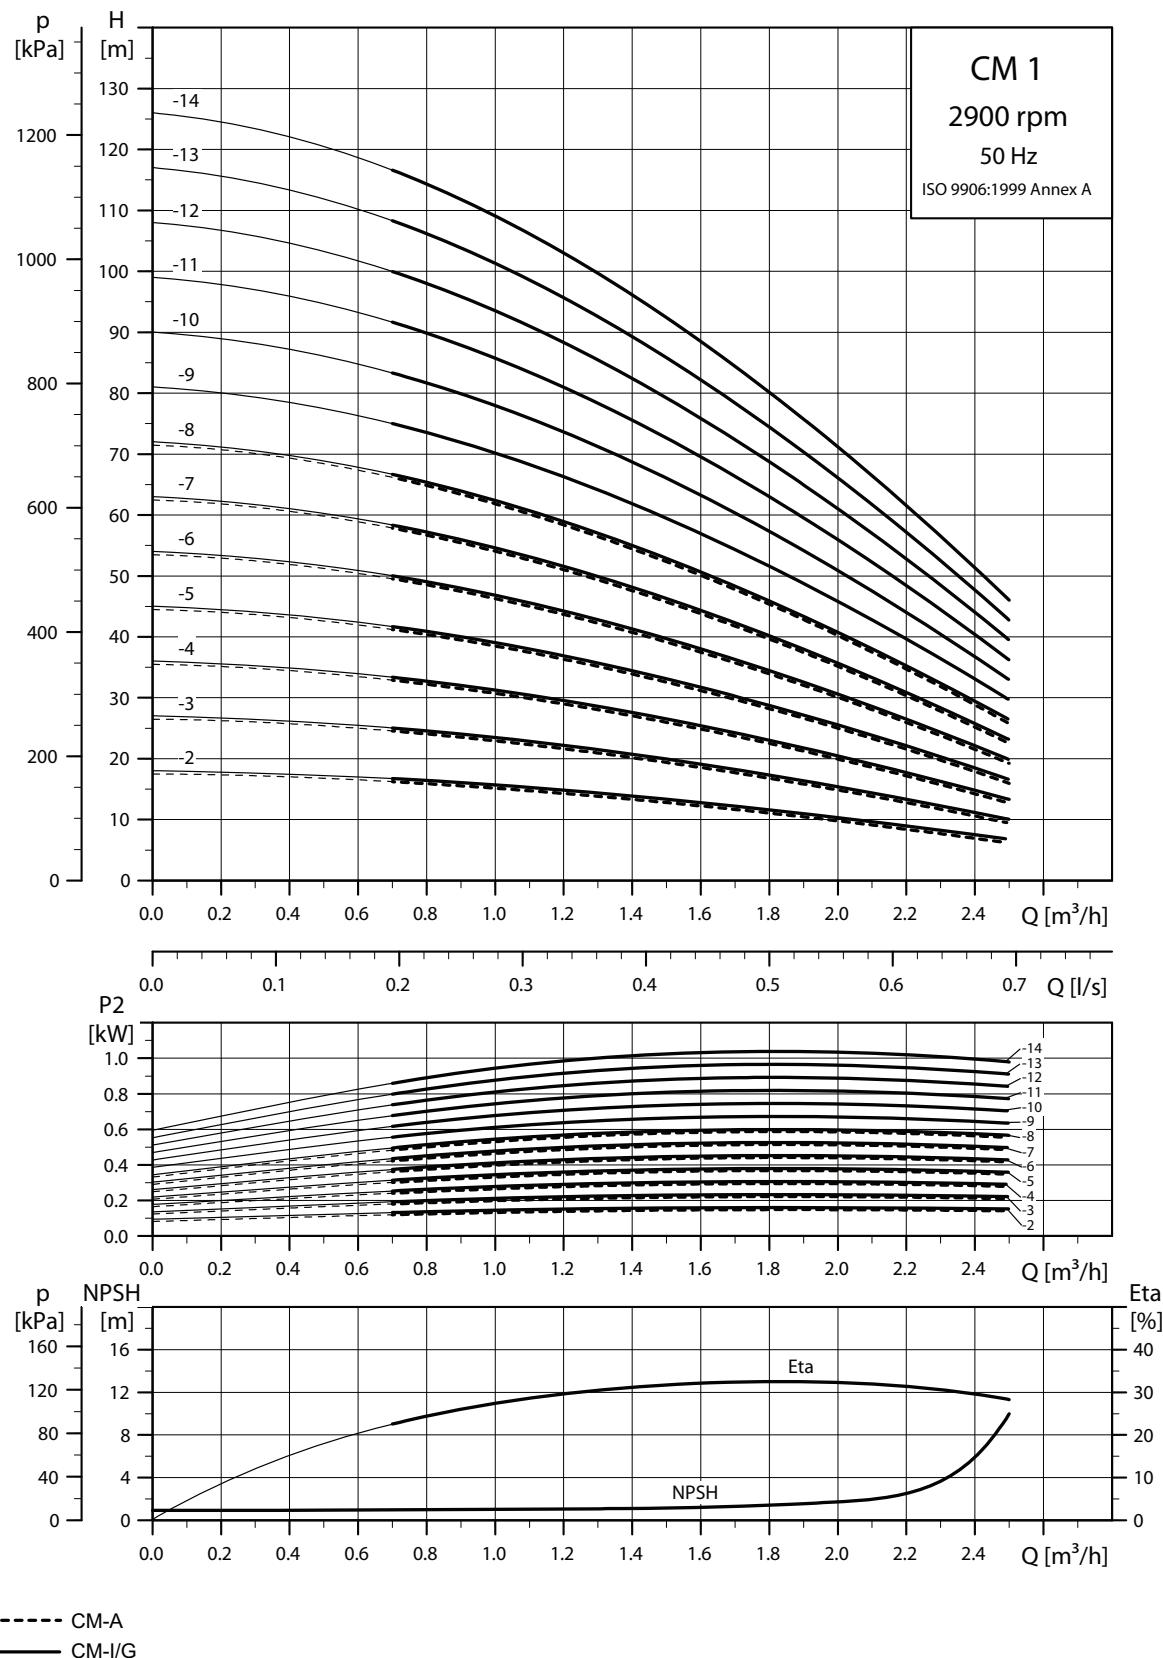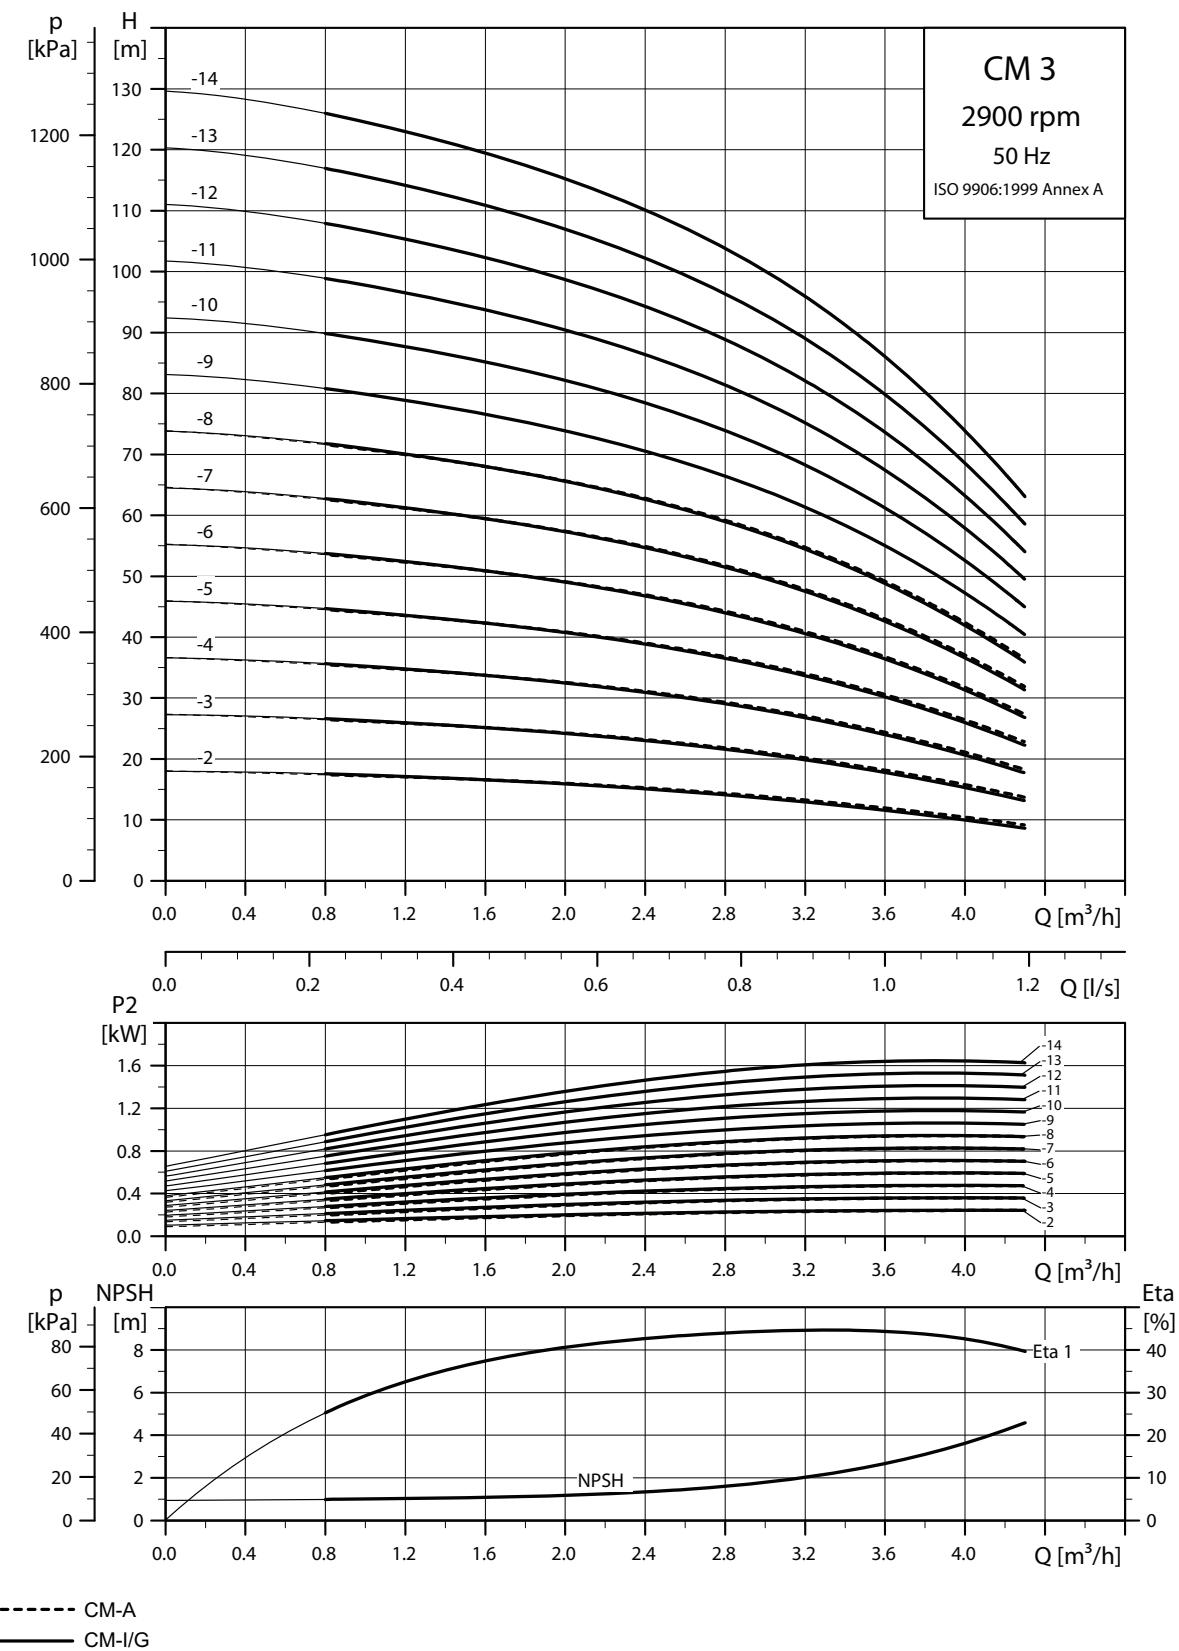


**CM 3**

TM04 3335 5112

## CM 5

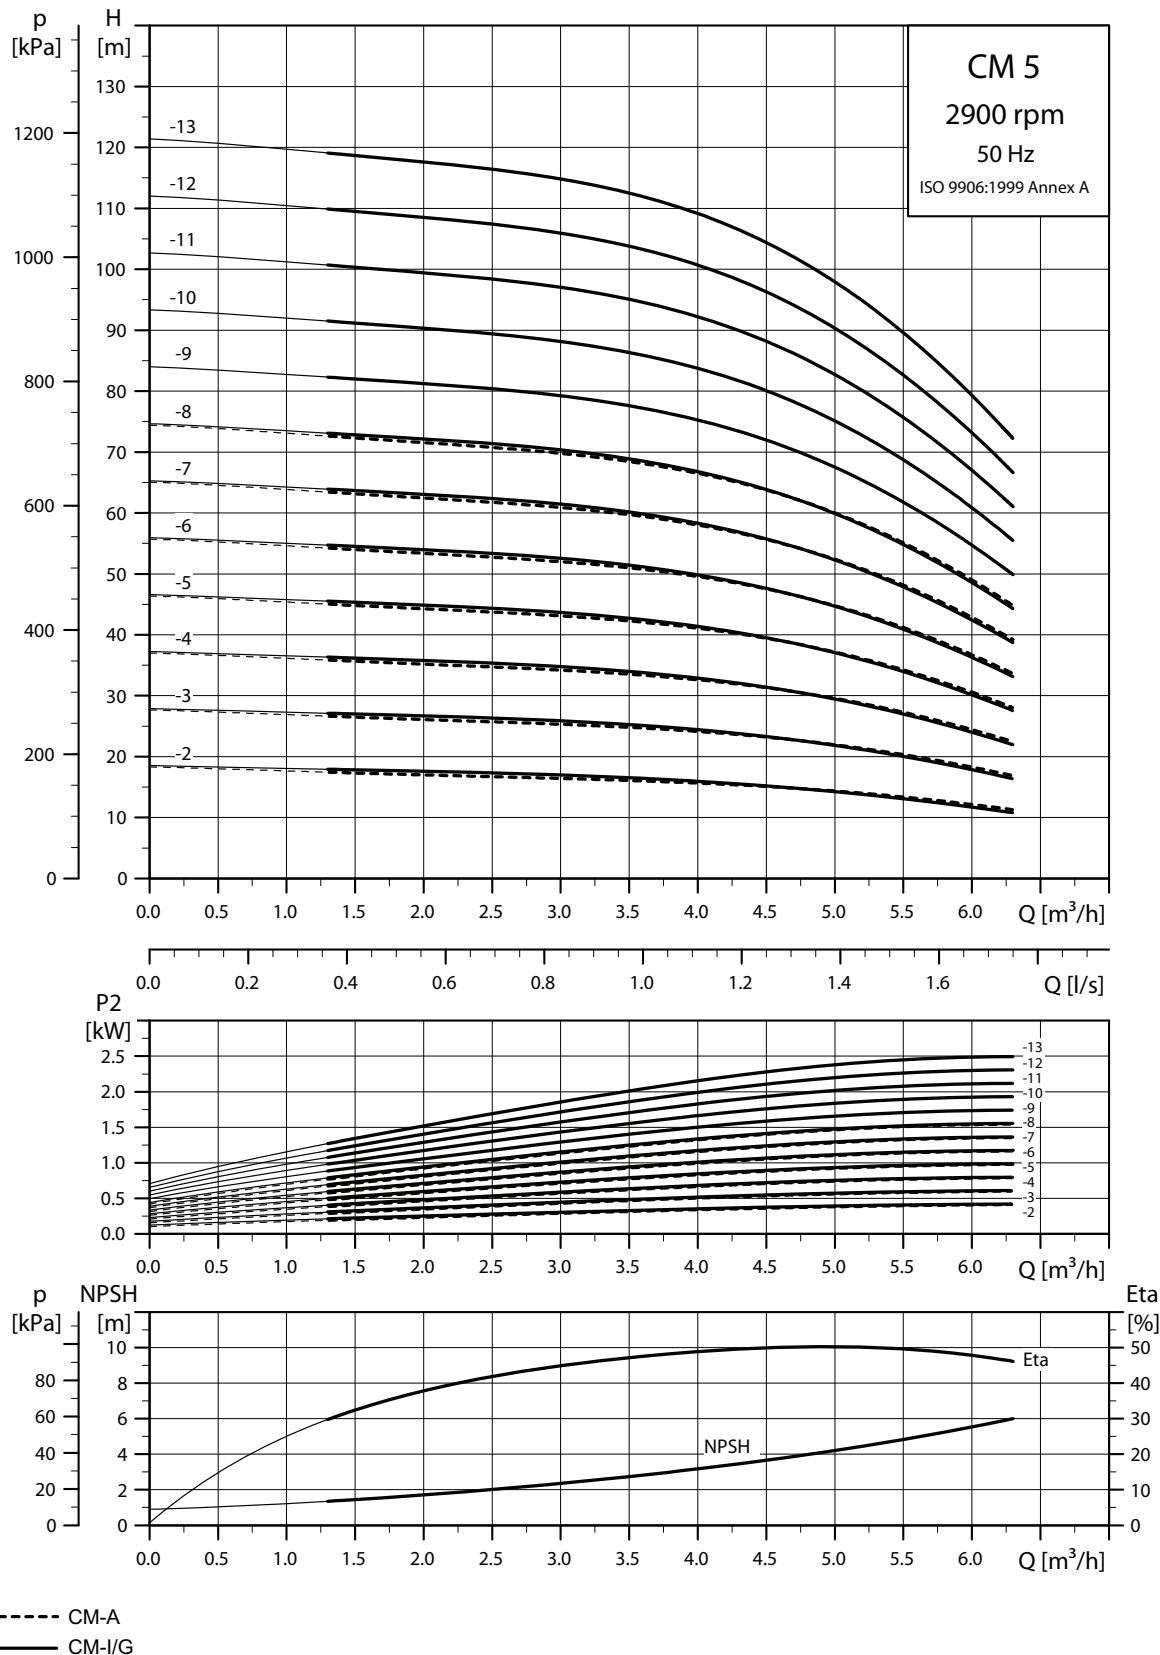


TM04 3336 512

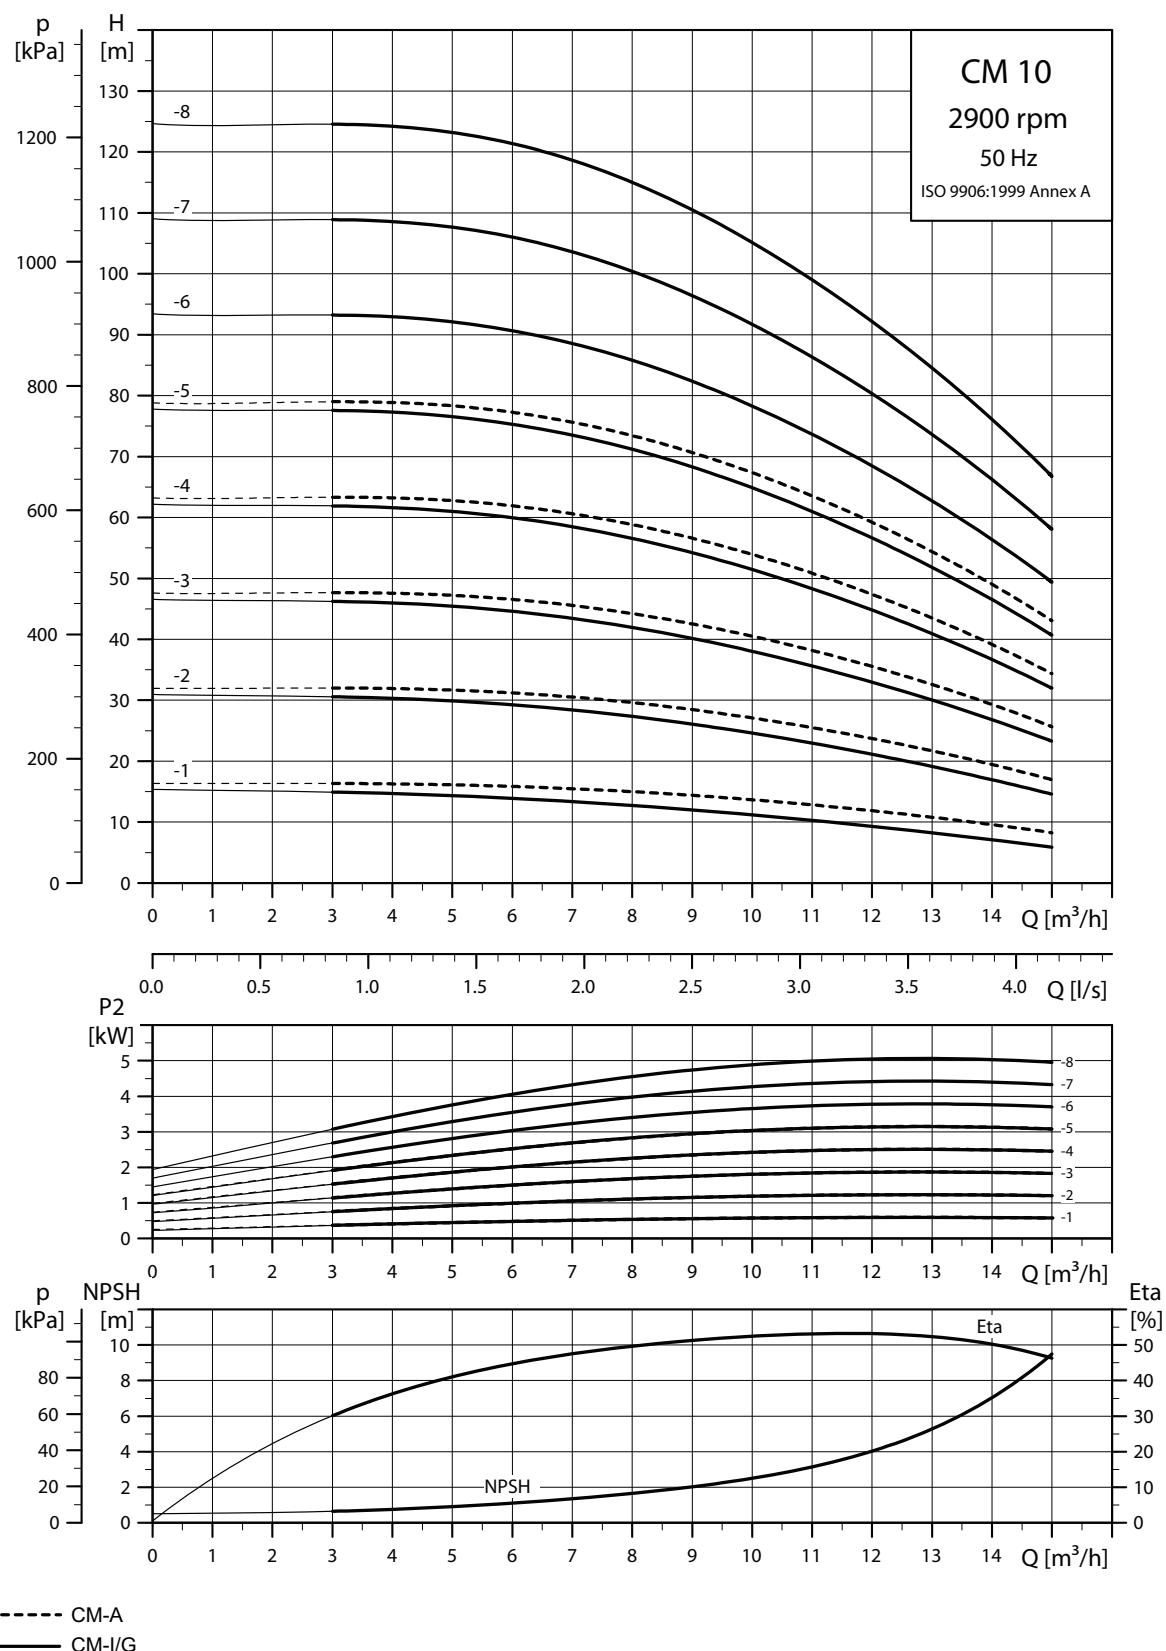
**CM 10**

TM04 33337 5112

## CM 15

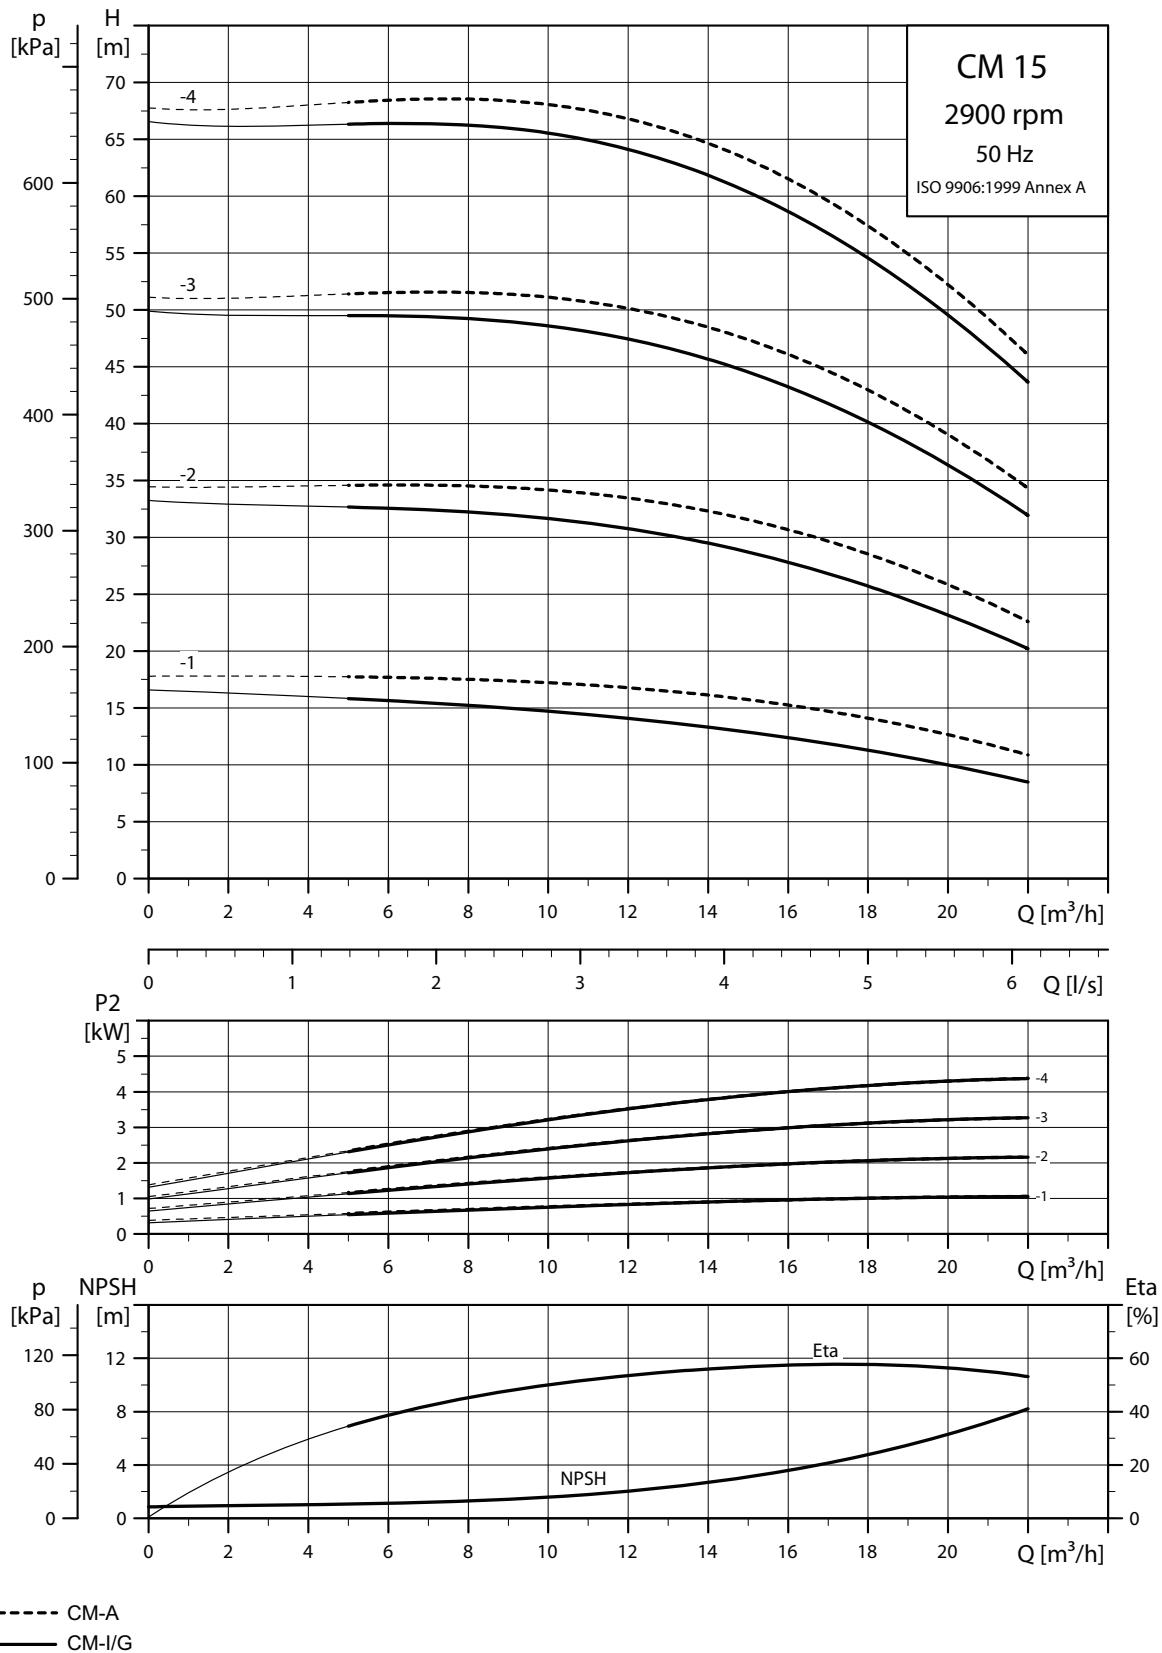


TM04 3338 5112

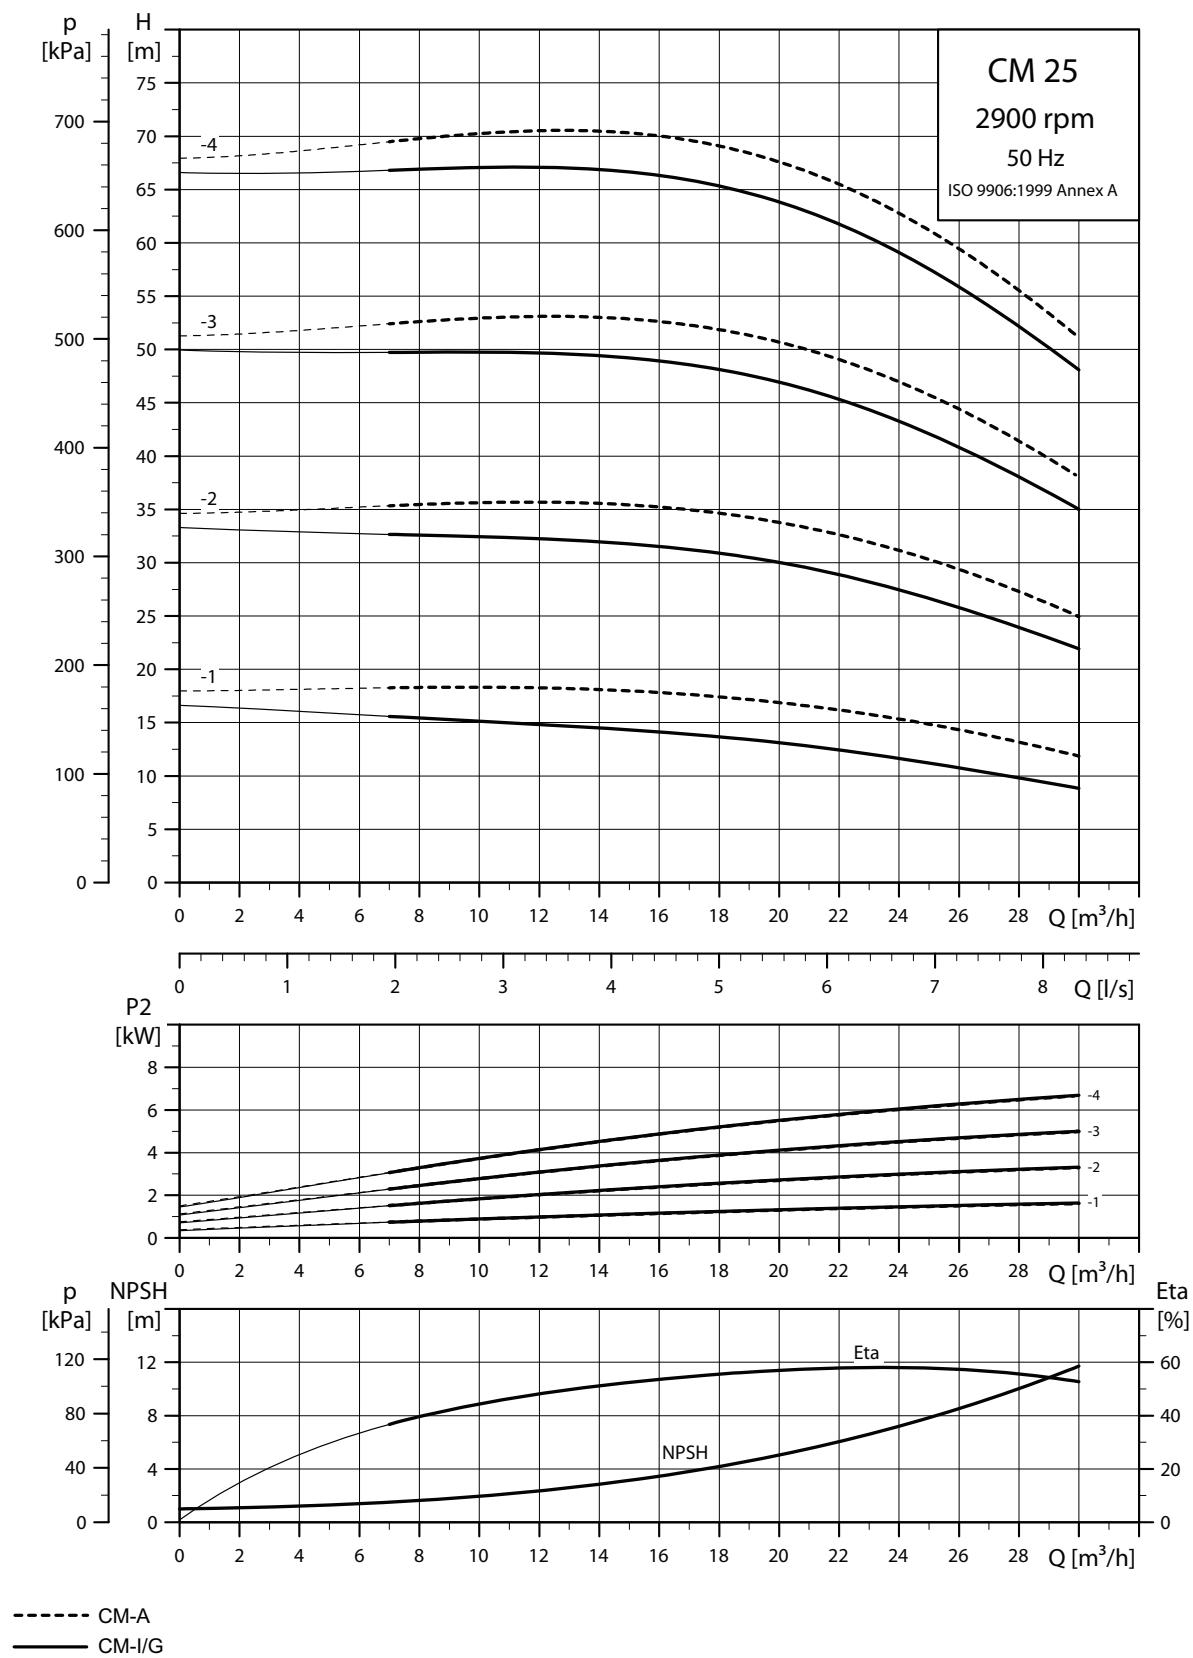**CM 25**


TM04 3339 5112

## 17. Performance curves, CM 60 Hz


**CM 1**

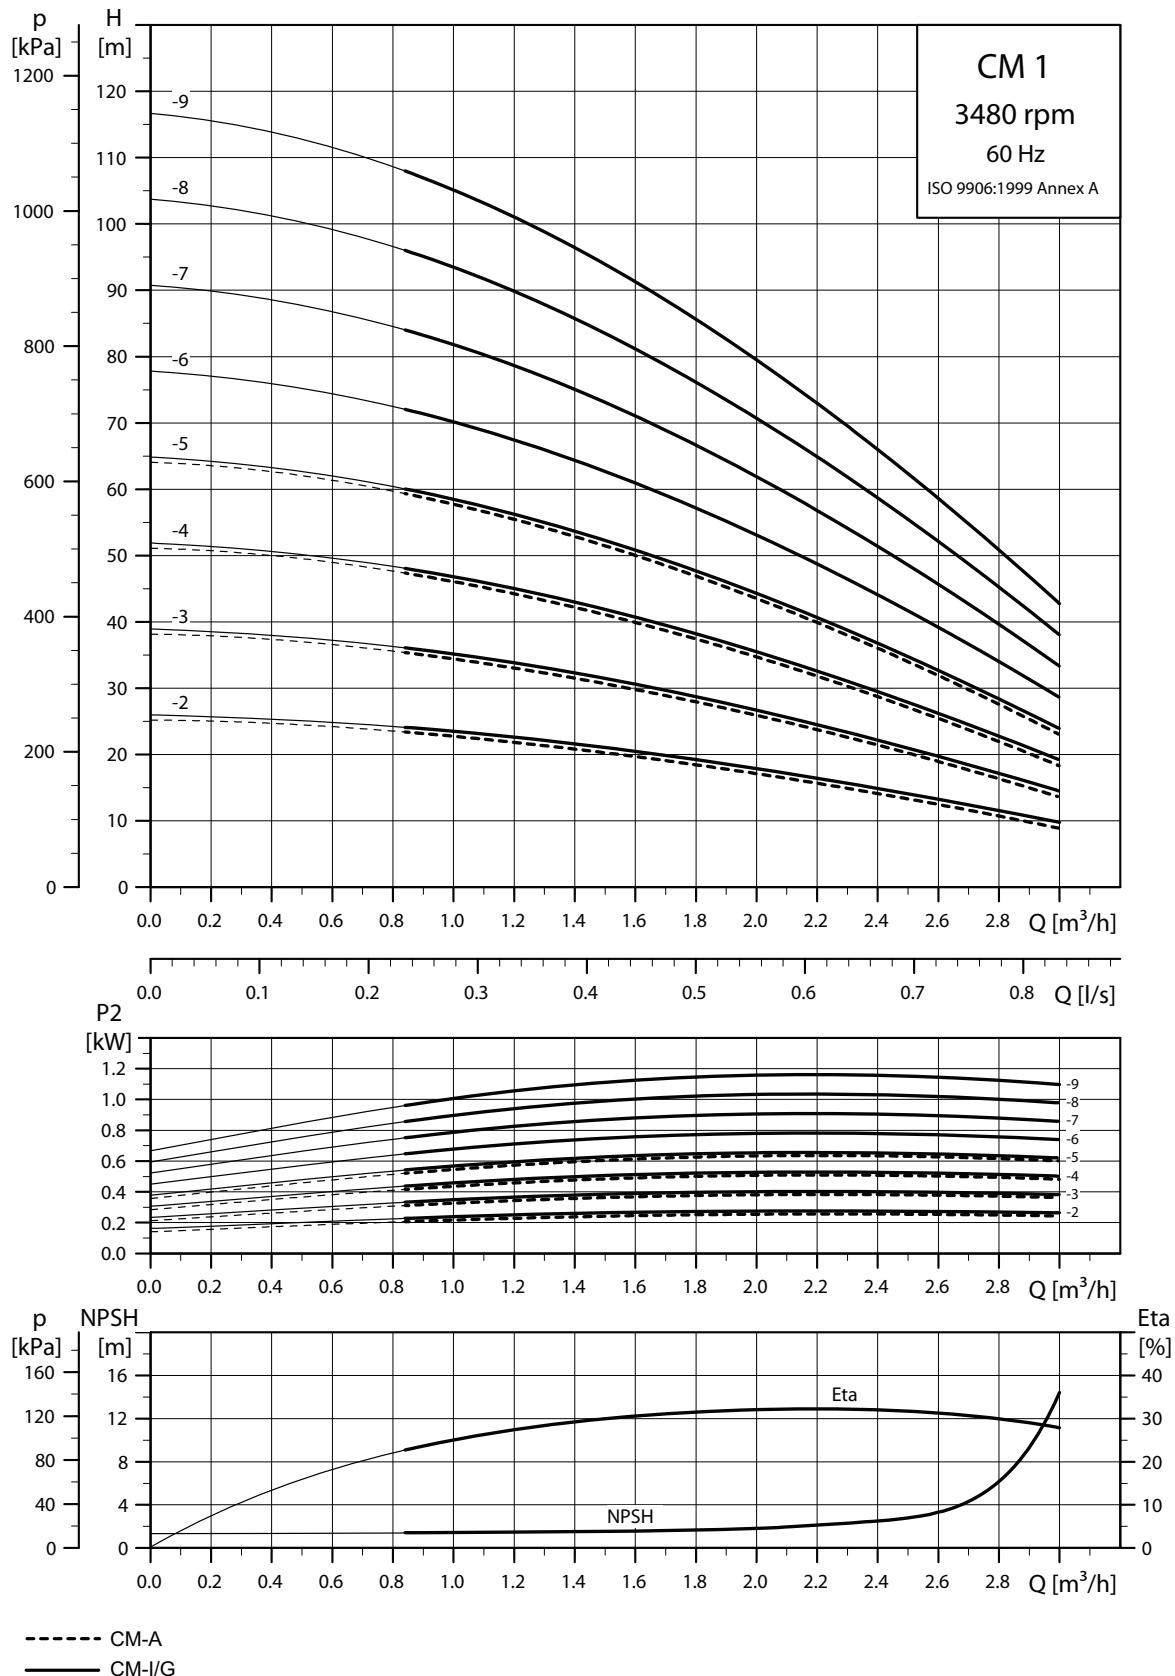


TM04 337-512

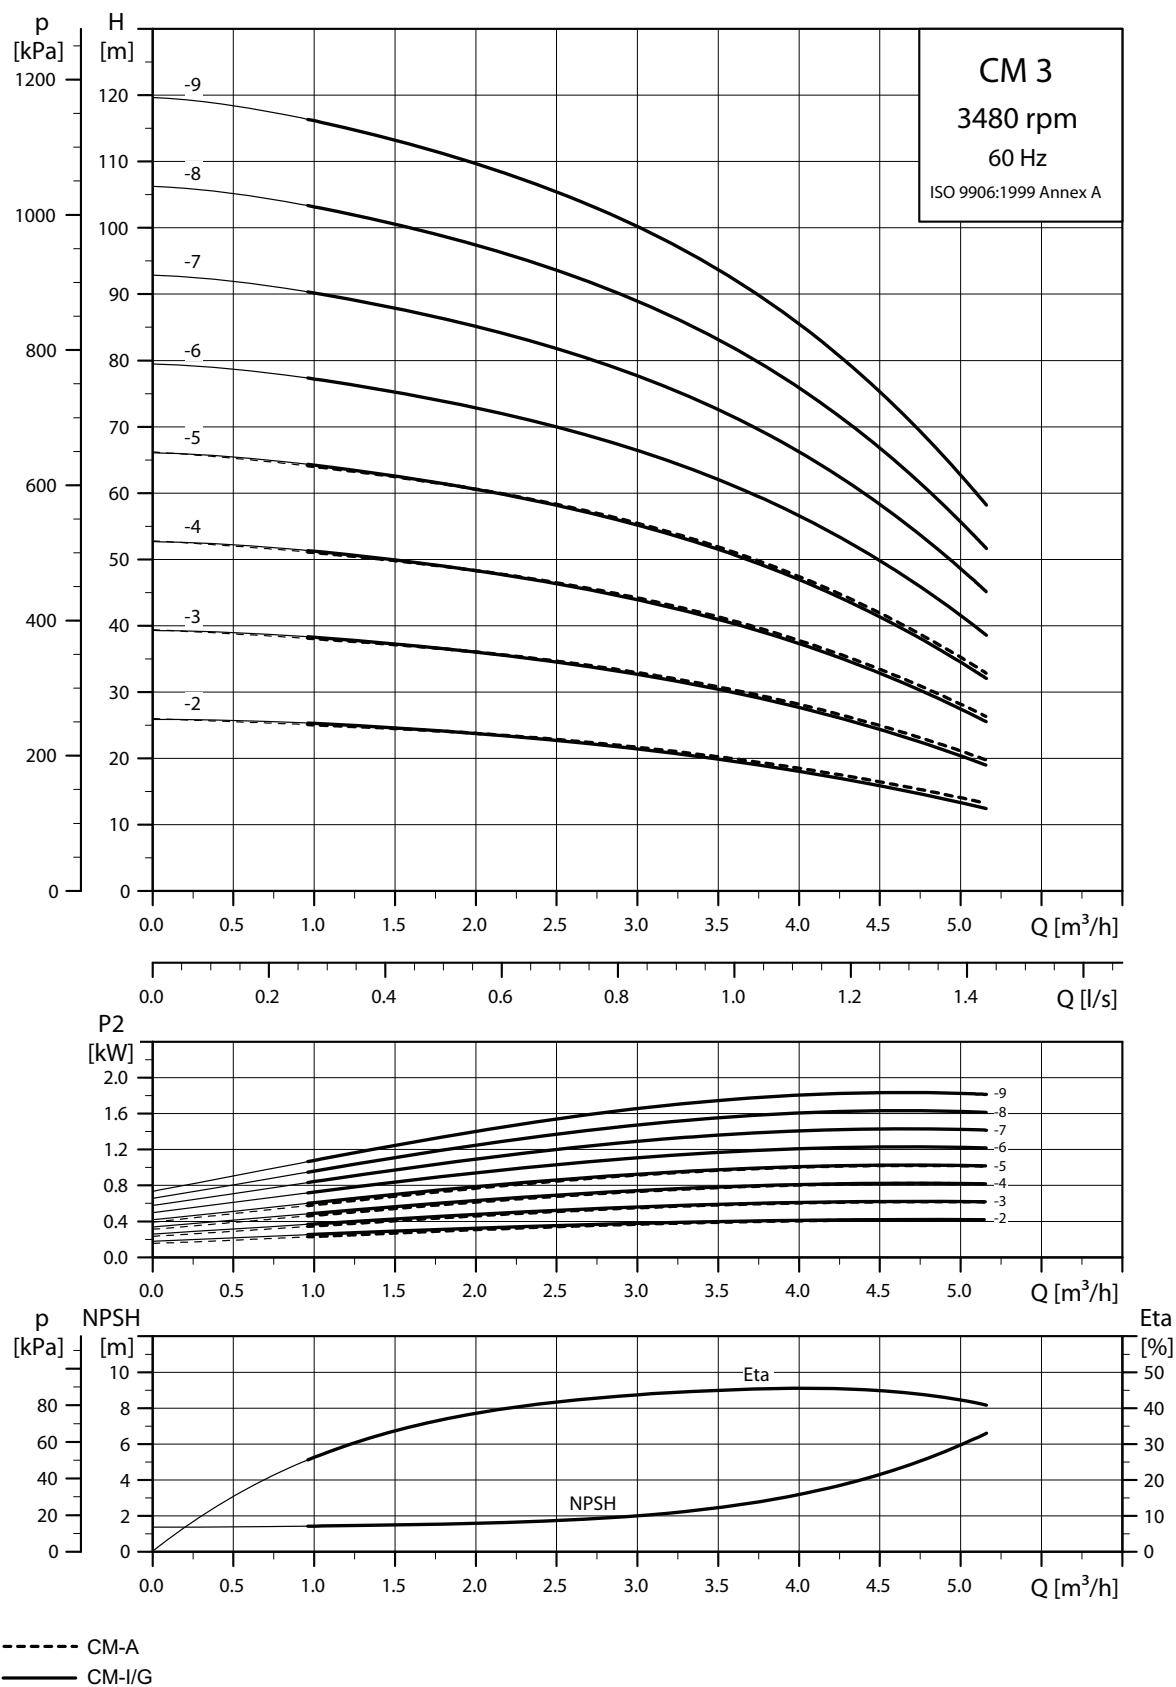
**CM 3**

TM04 33371 5112

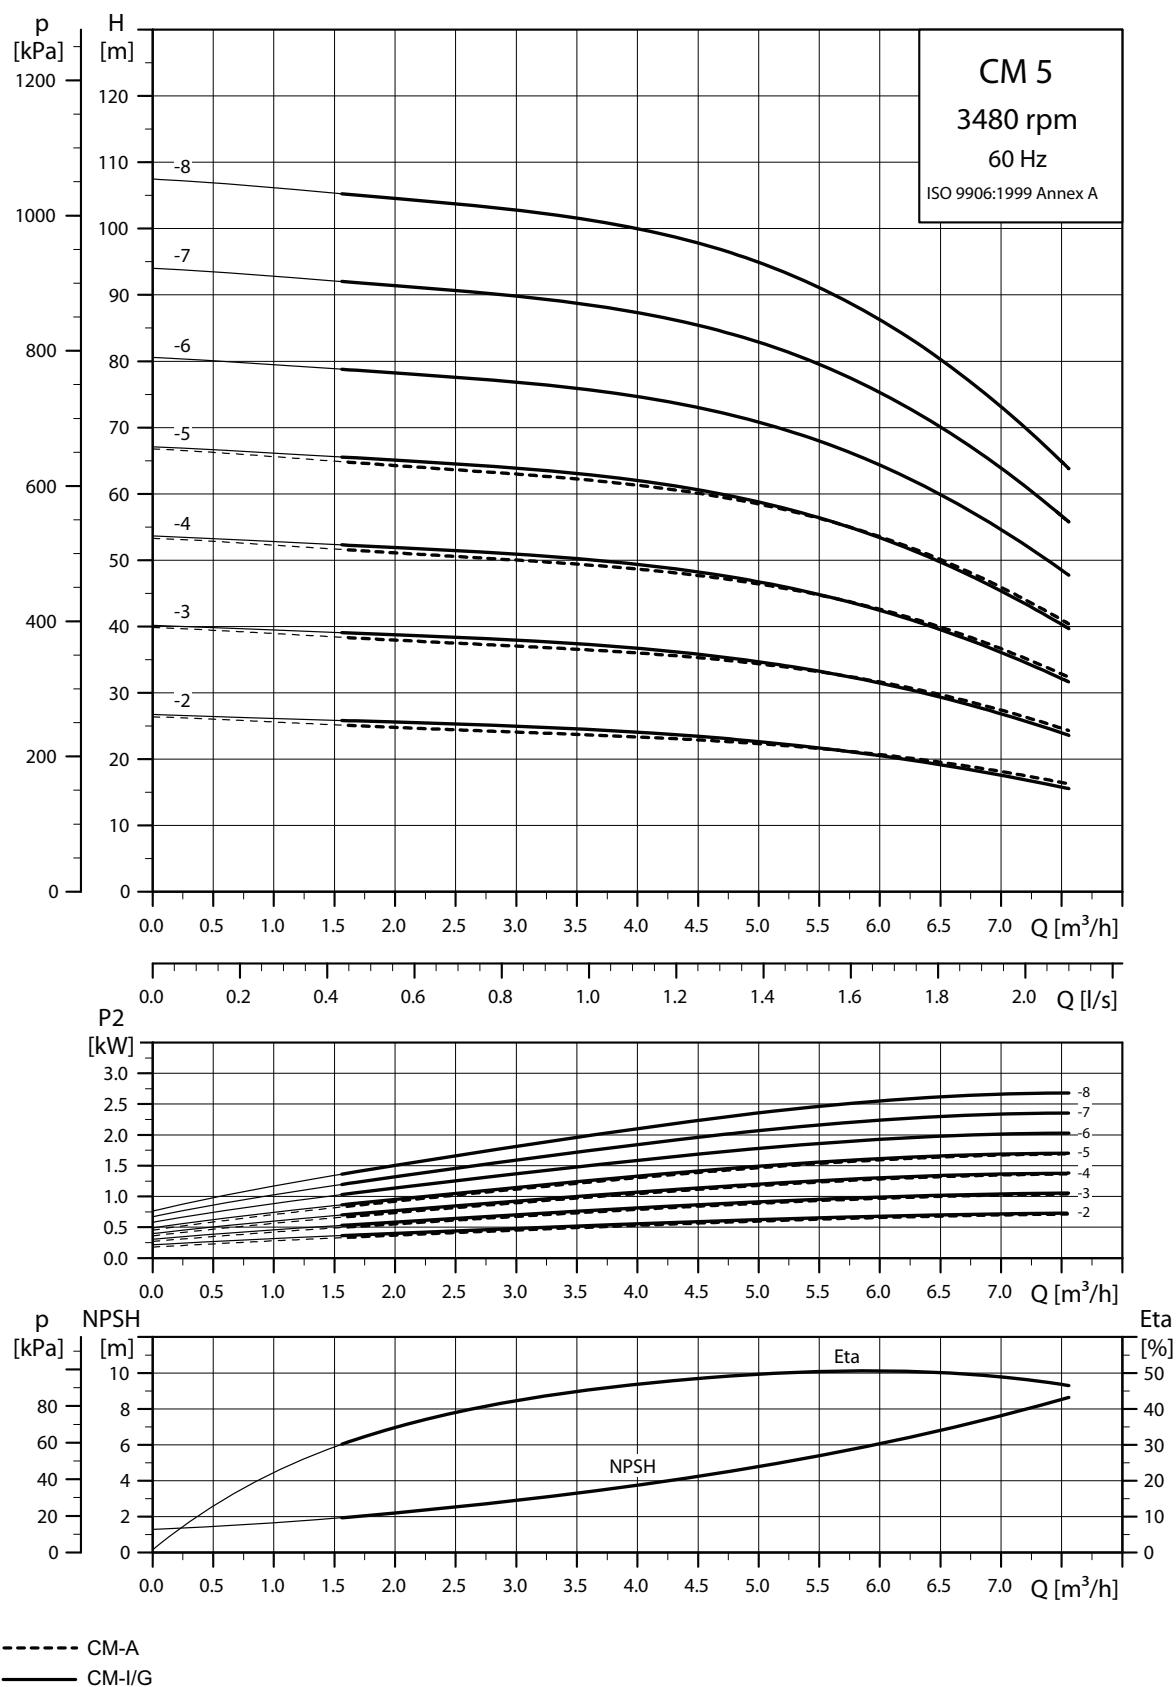
**CM 5**

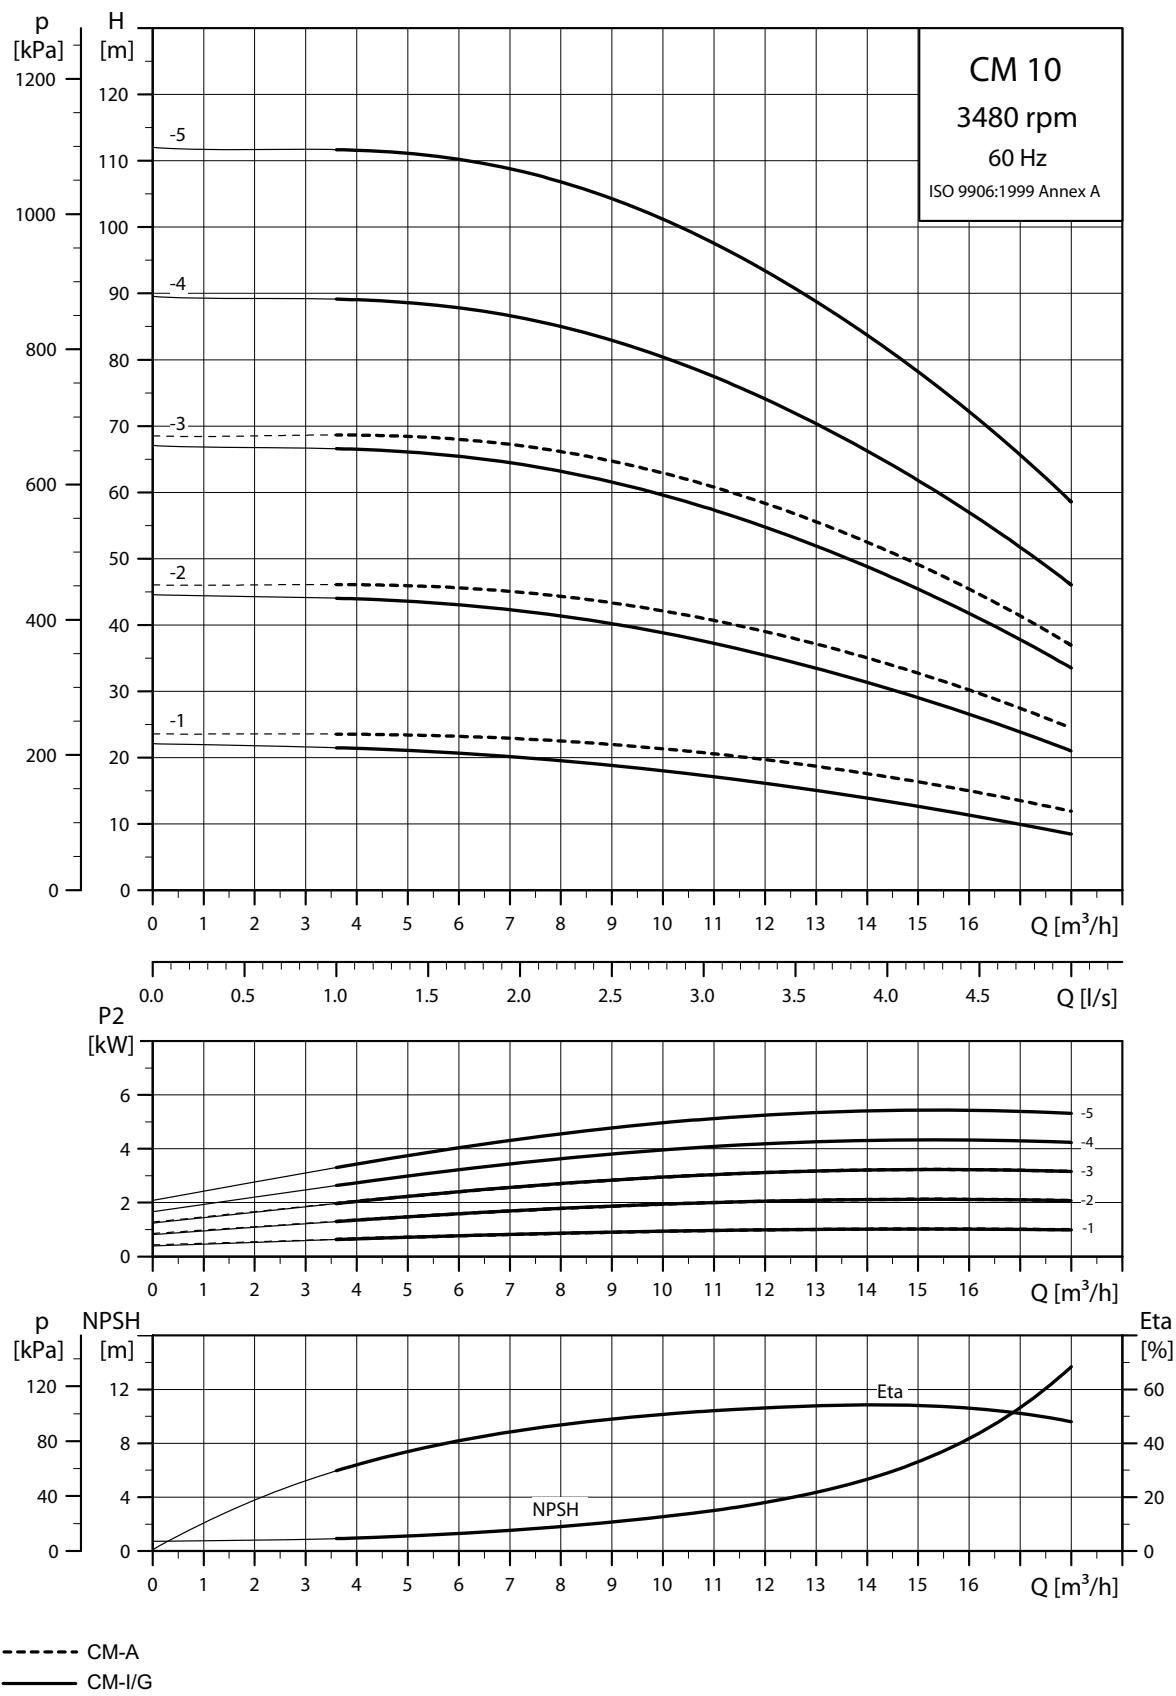**CM 10**

TM04 3373 5112

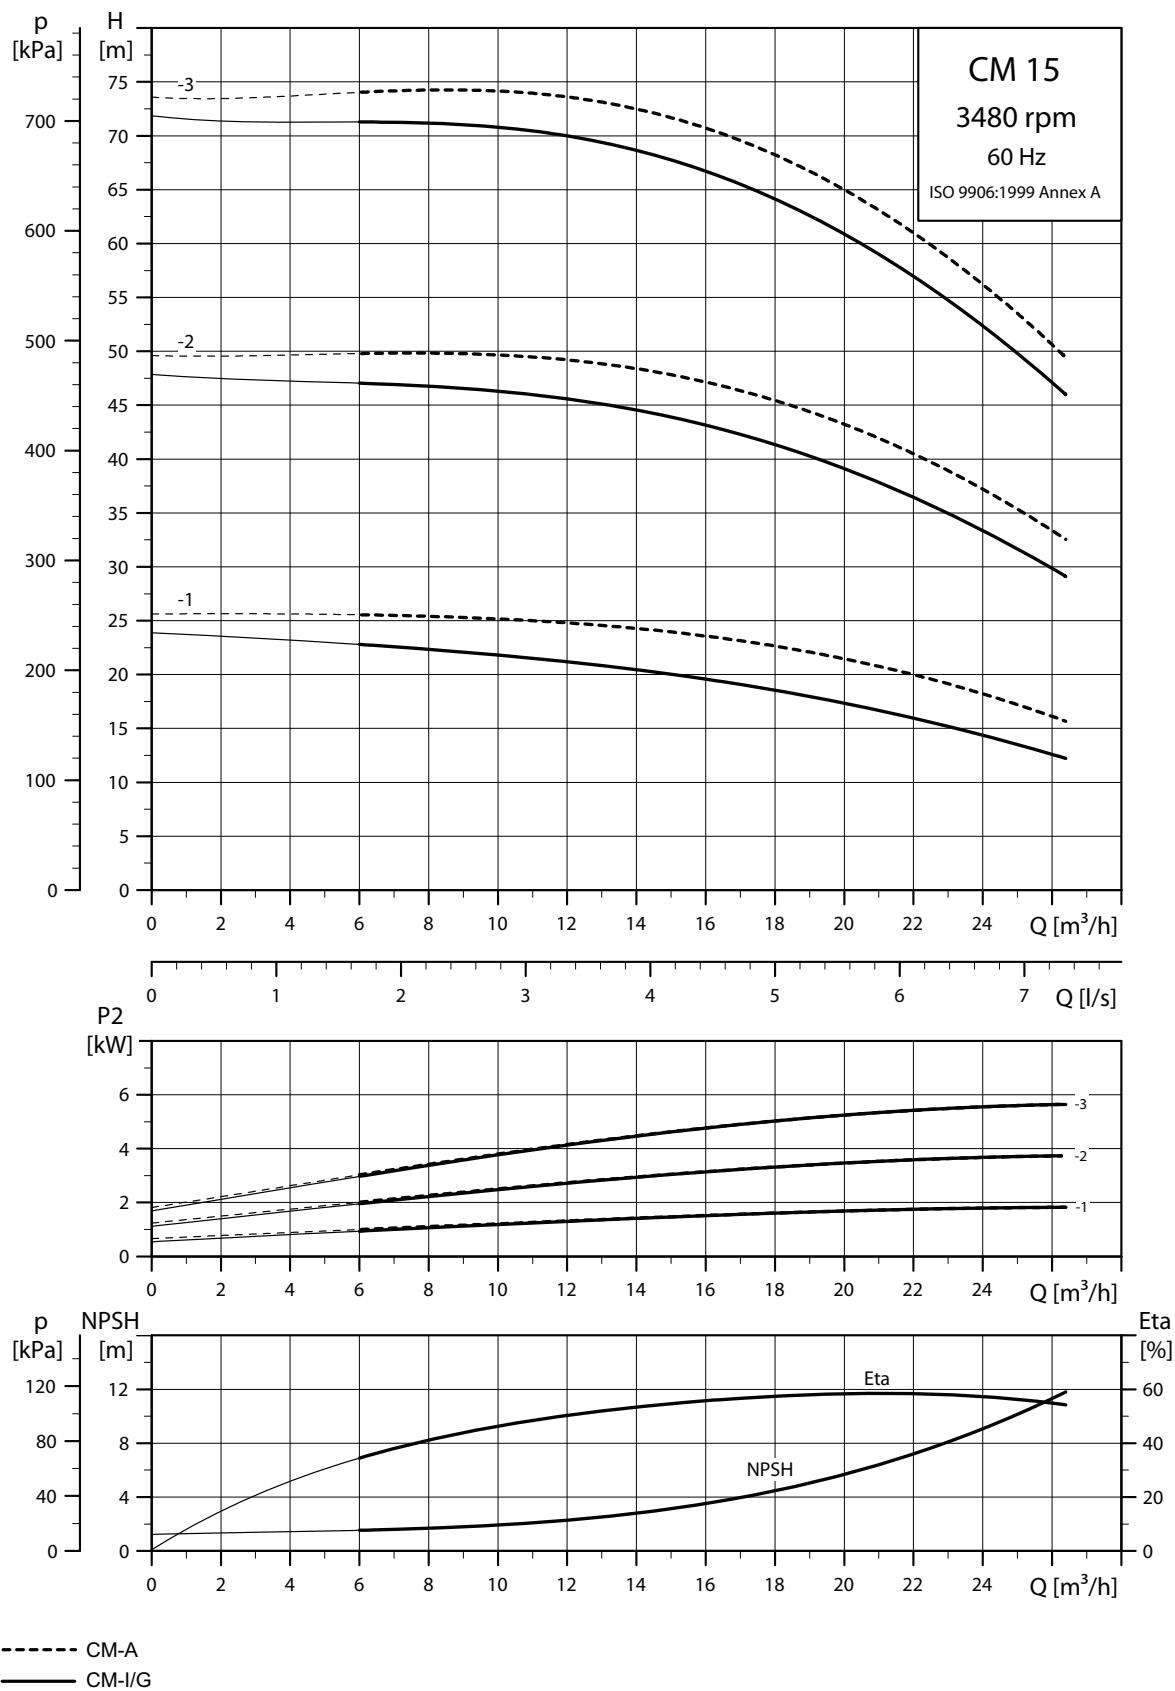**CM 15**


TMO4 3374 512

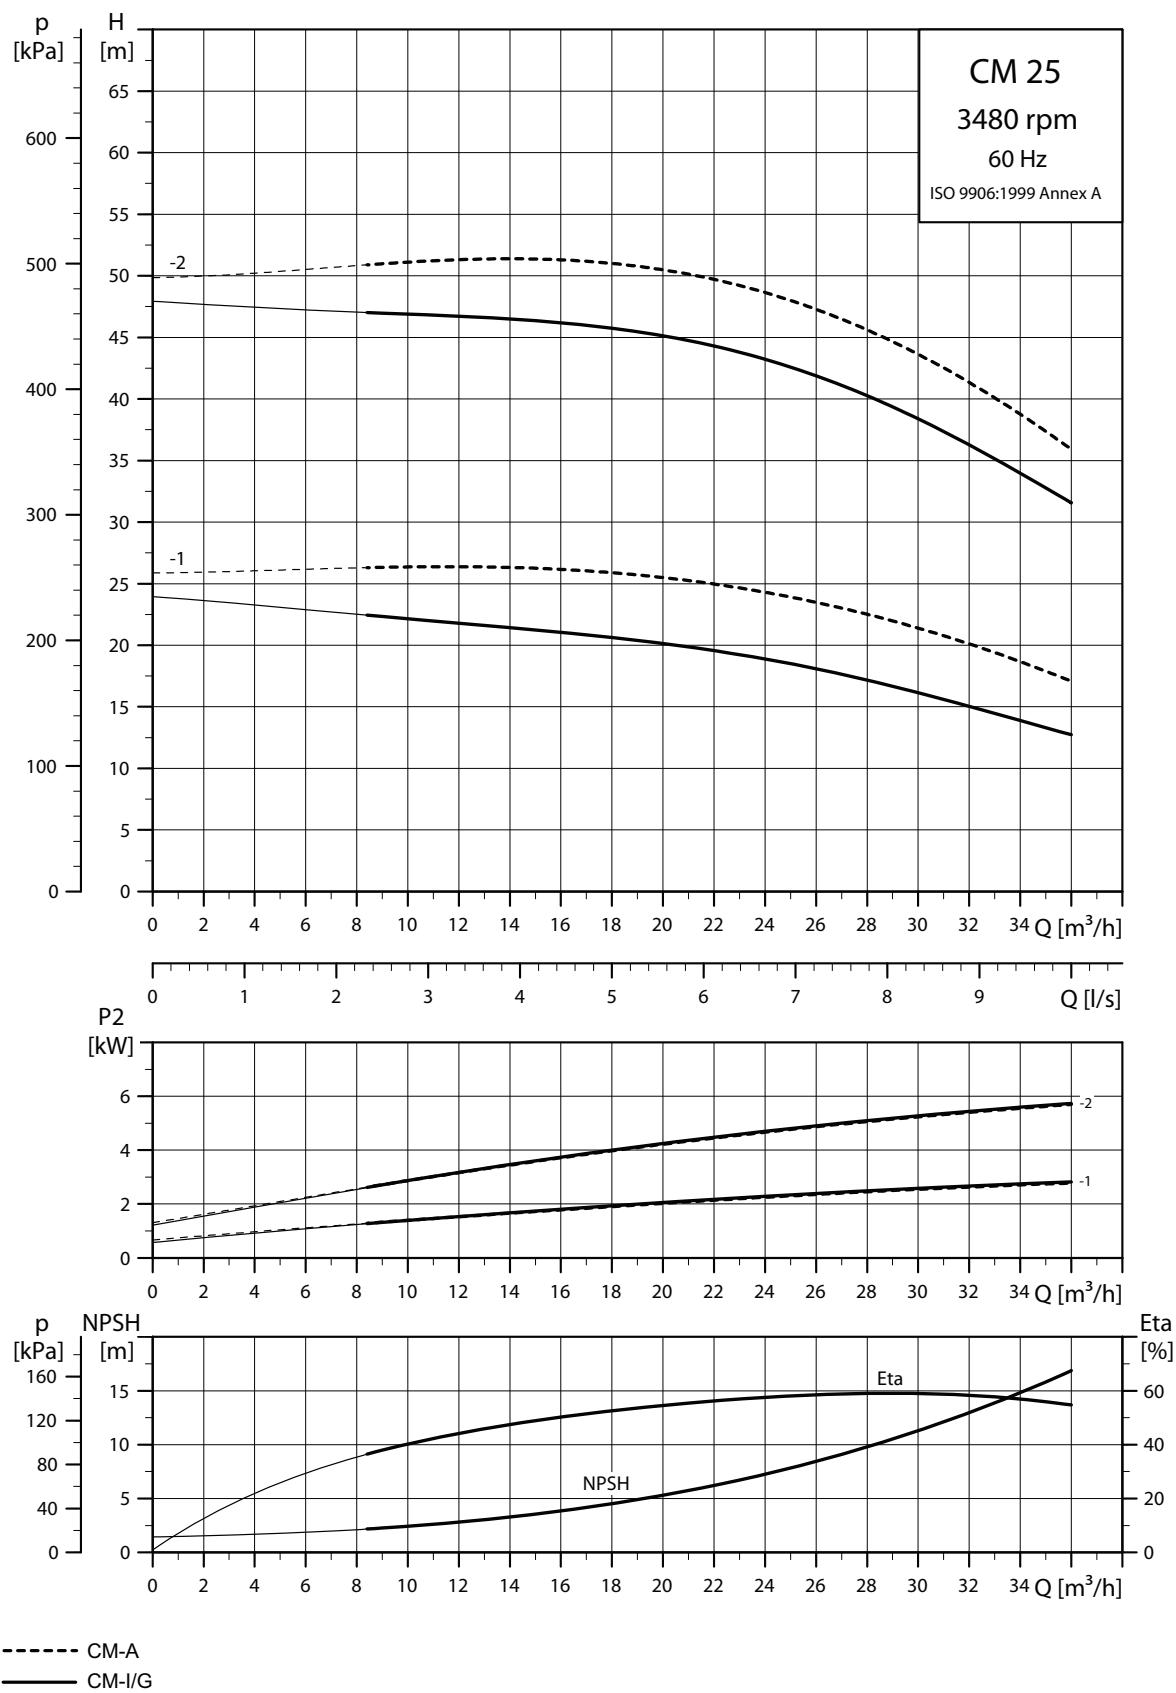**CM 25**


TM04 3375 5112

## 18. Performance curves, CME 50/60 Hz

### CME 1

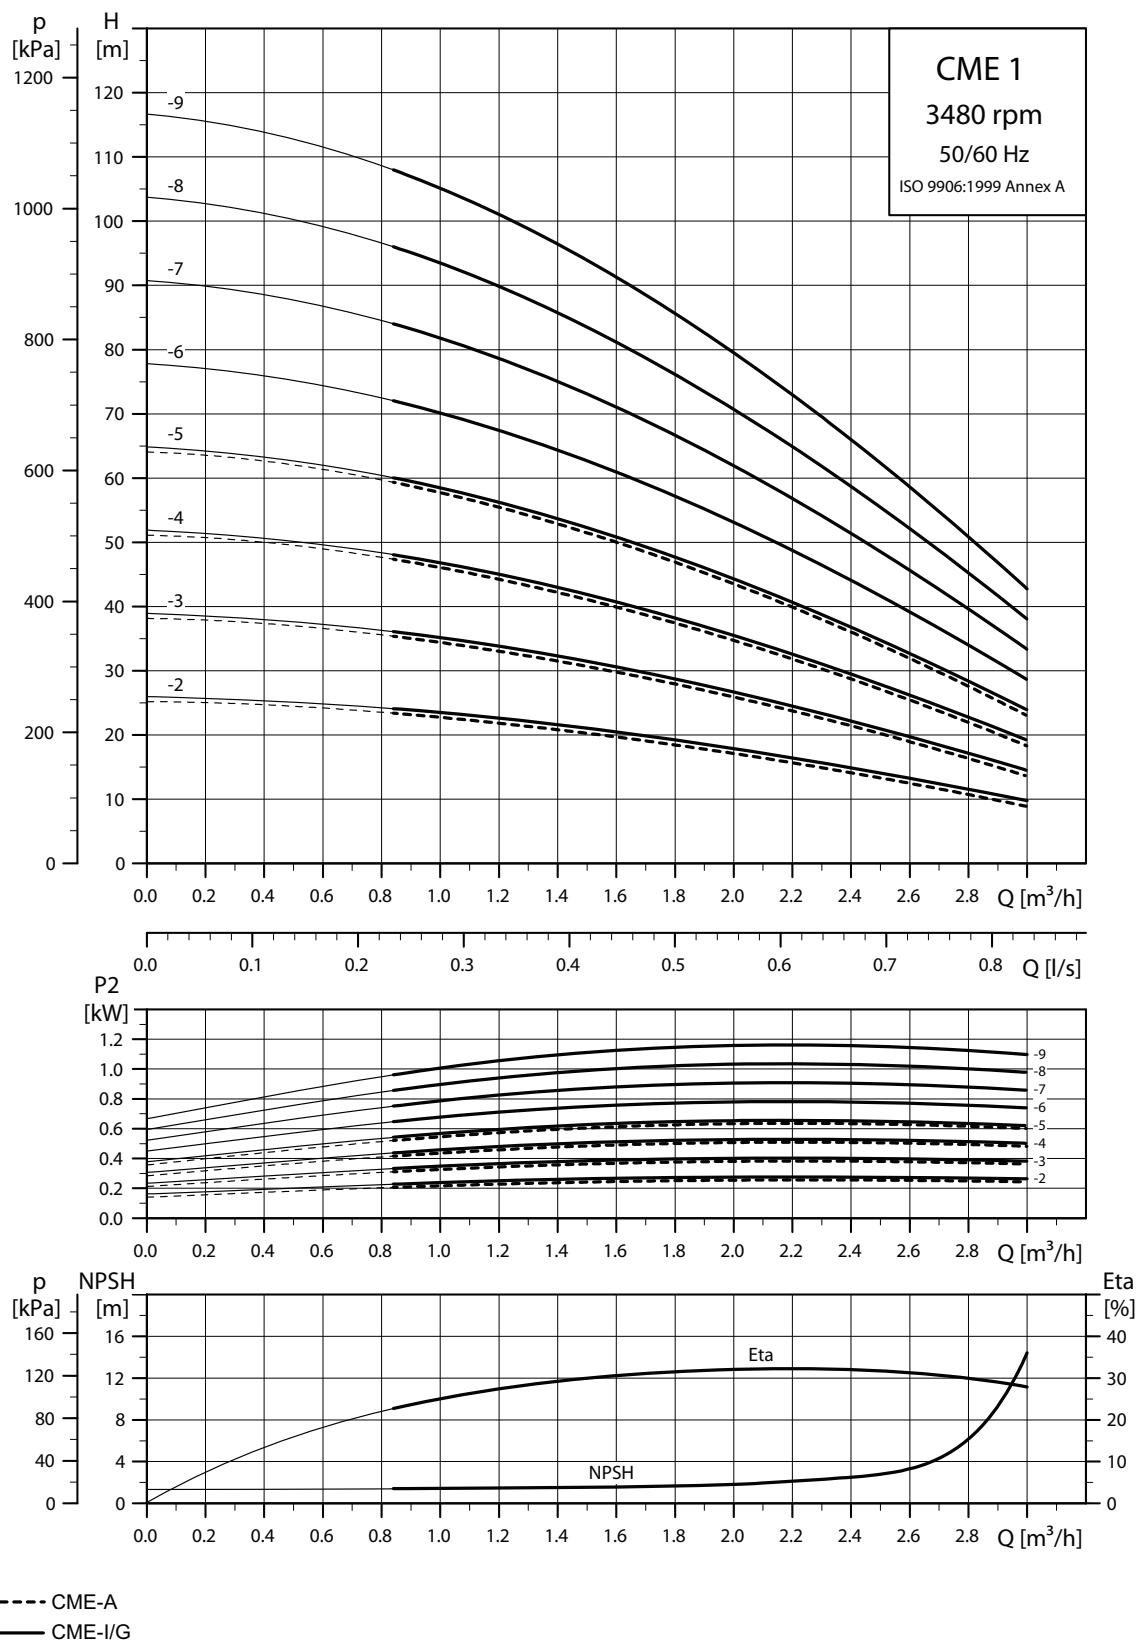


**Note:** Irrespective of the input frequency, the 100 % speed of CME pumps is approximately  $3400 \text{ min}^{-1}$ .

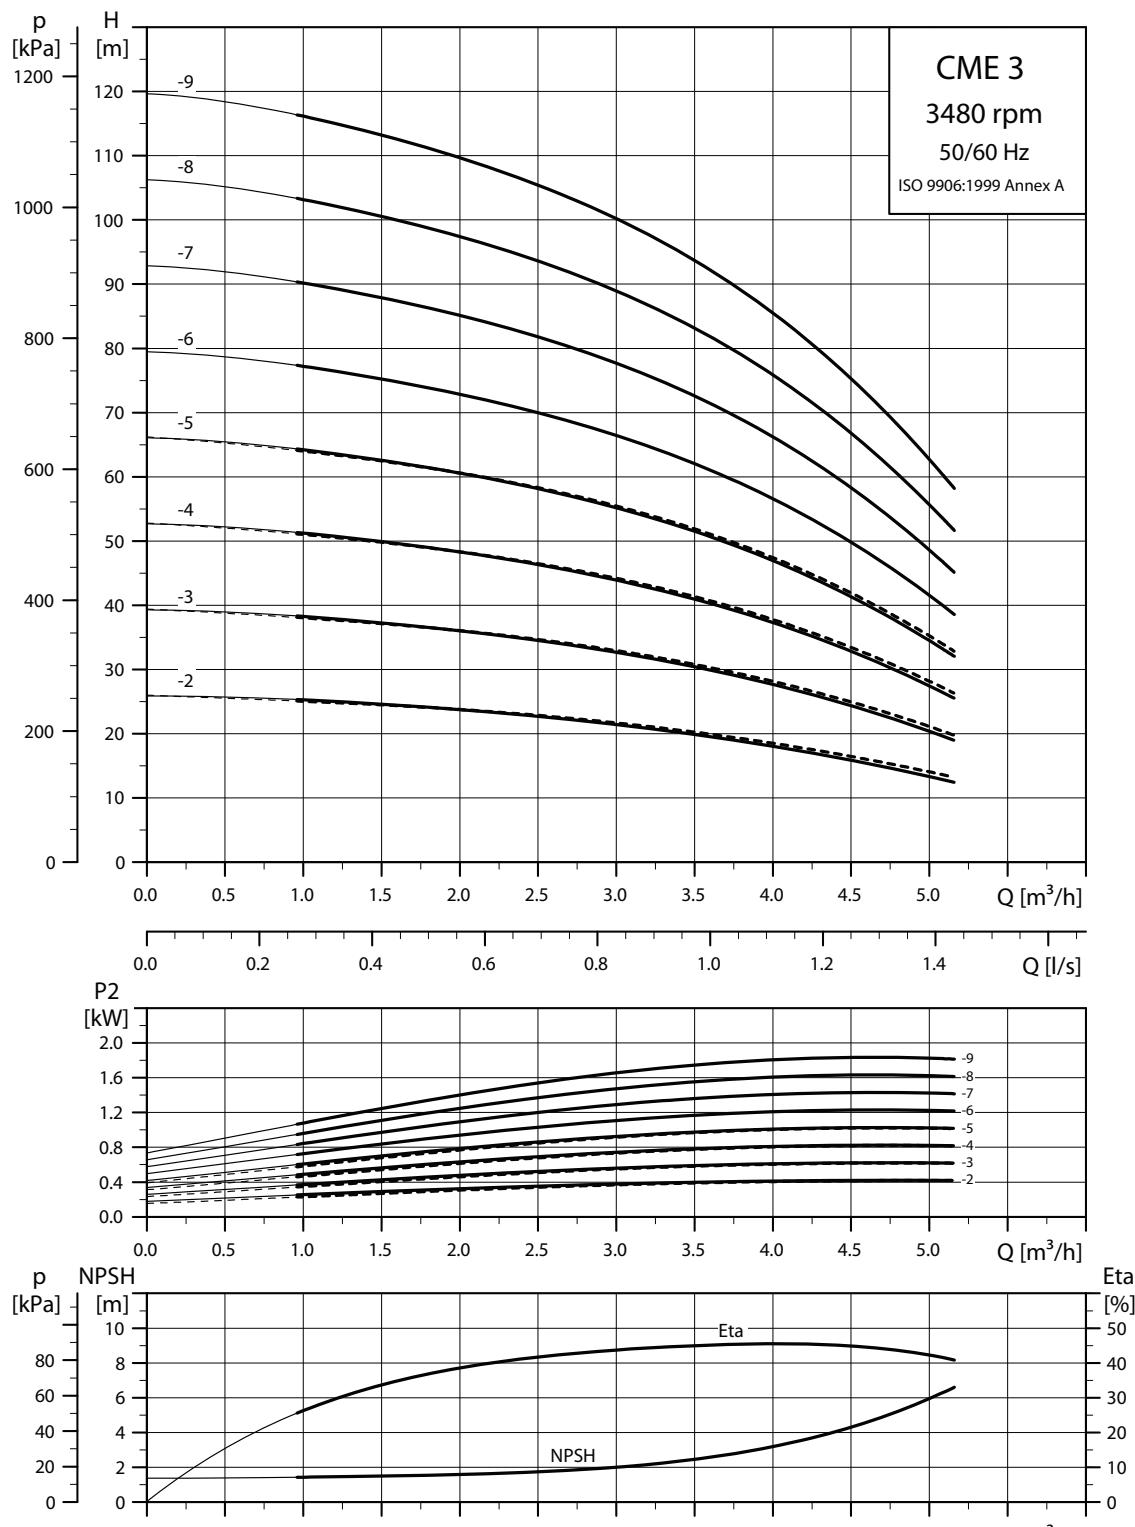
**CME 3**

**Note:** Irrespective of the input frequency, the 100 % speed of CME pumps is approximately  $3400 \text{ min}^{-1}$ .

## CME 5

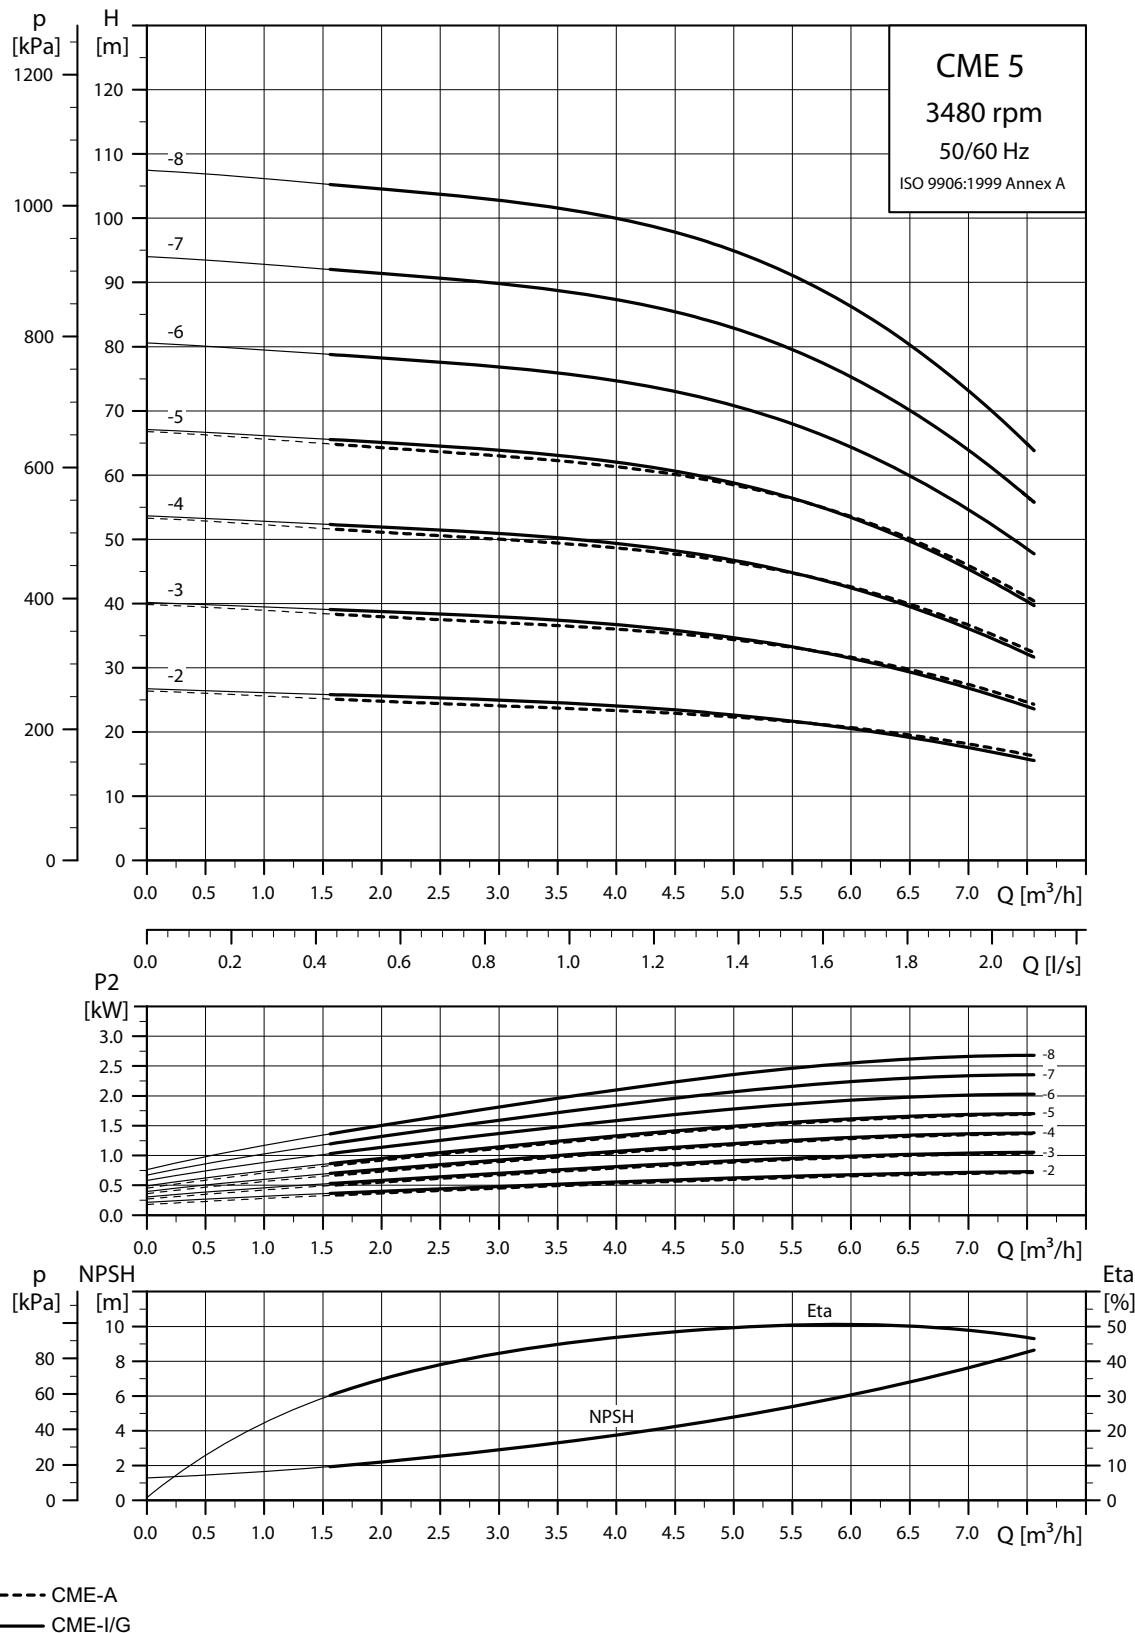


**Note:** Irrespective of the input frequency, the 100 % speed of CME pumps is approximately  $3400 \text{ min}^{-1}$ .

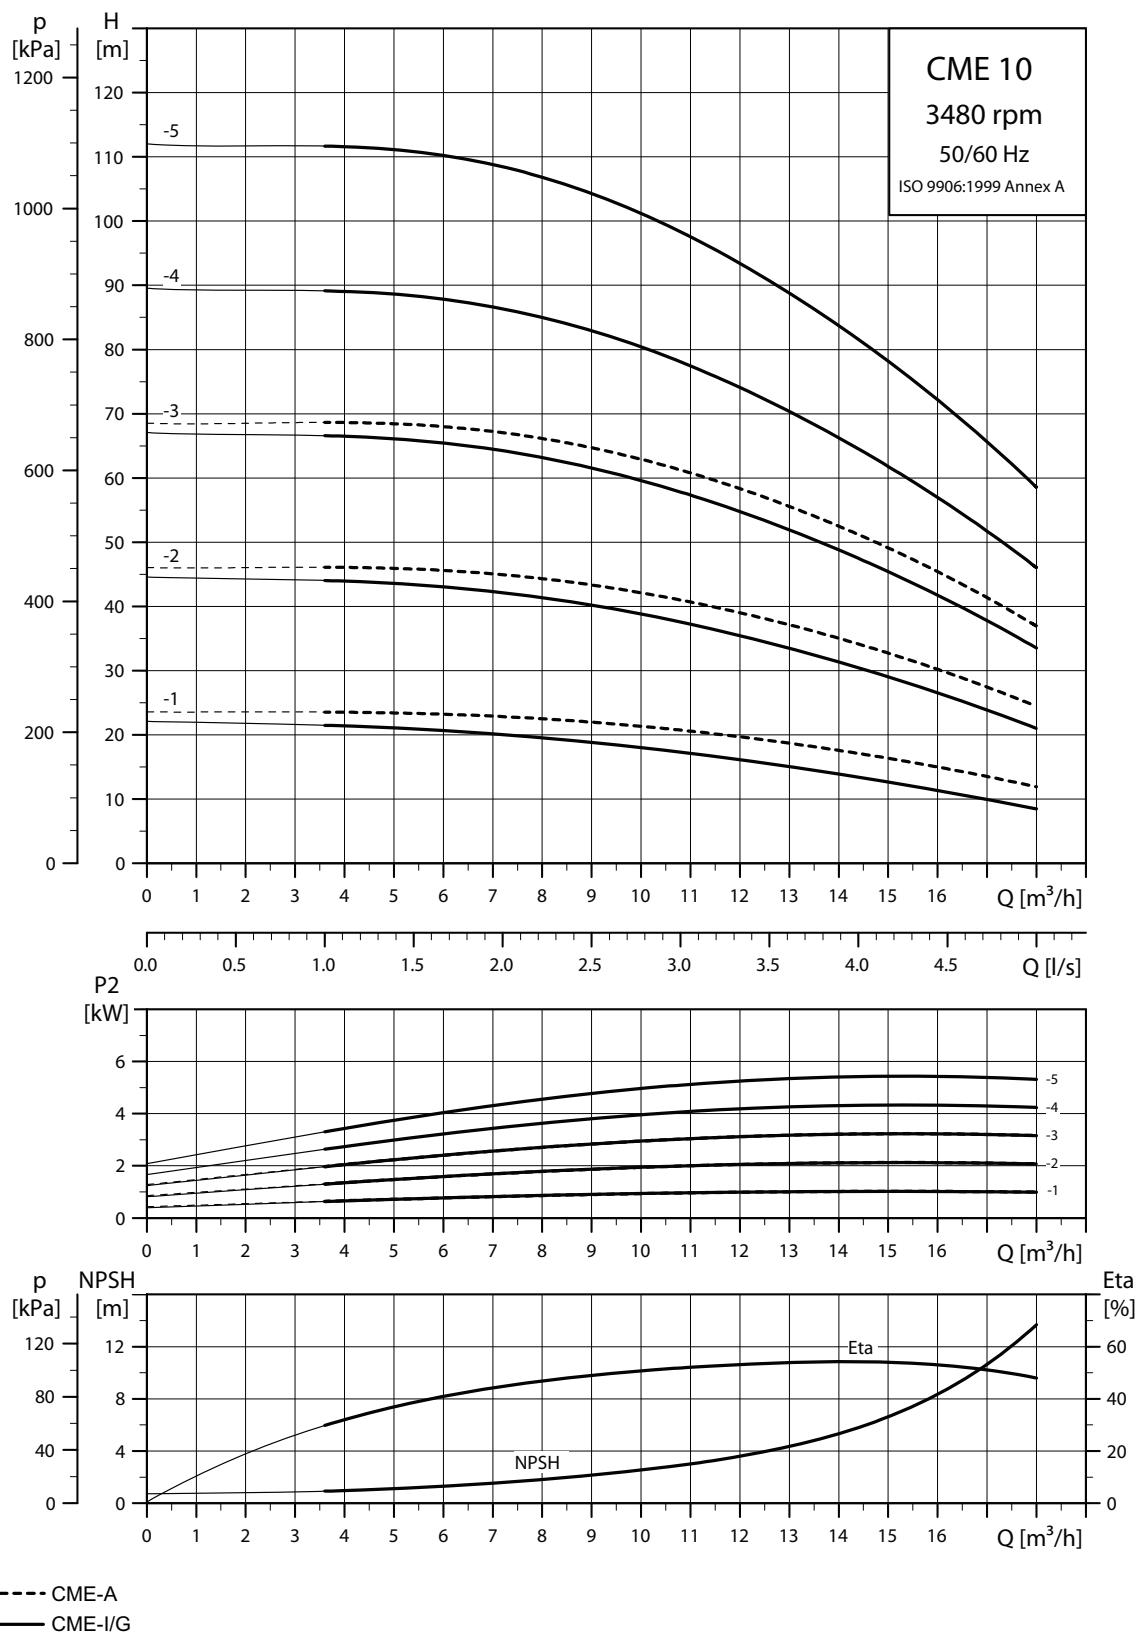
**CME 10**

**Note:** Irrespective of the input frequency, the 100 % speed of CME pumps is approximately 3400 min<sup>-1</sup>.

## CME 15

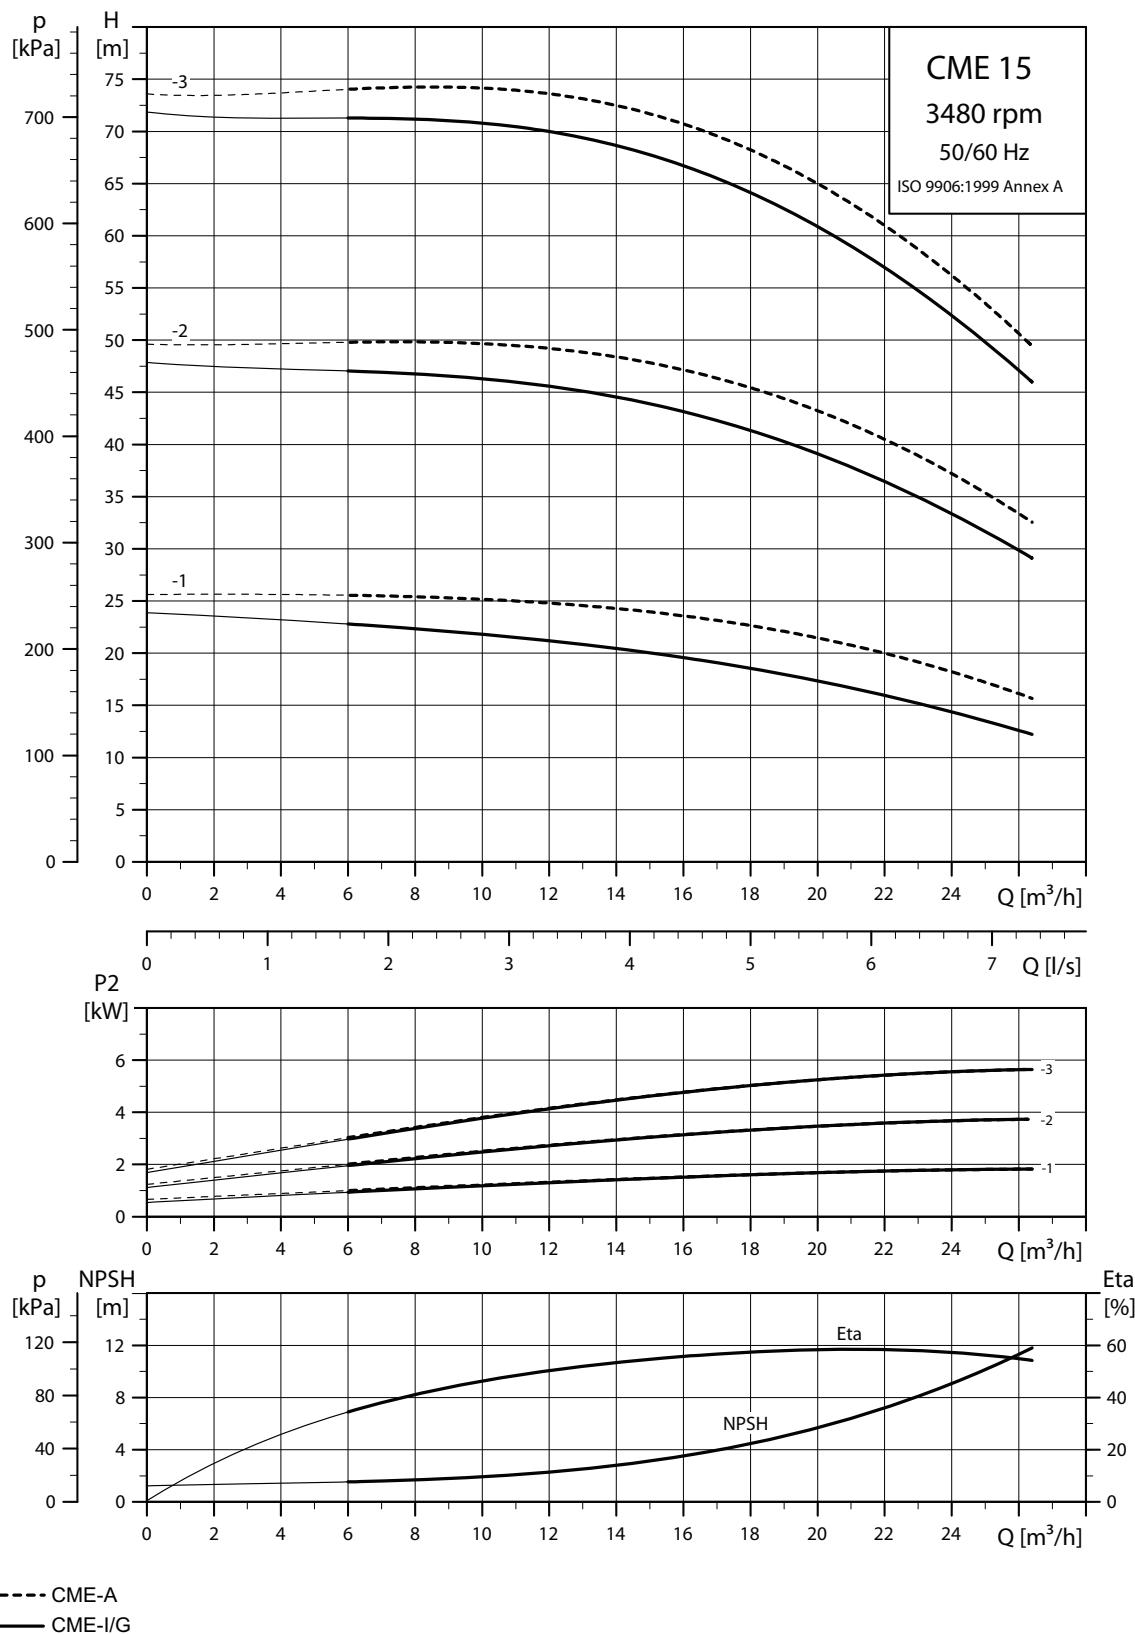

Note: Irrespective of the input frequency, the 100 % speed of CME pumps is approximately  $3400 \text{ min}^{-1}$ .


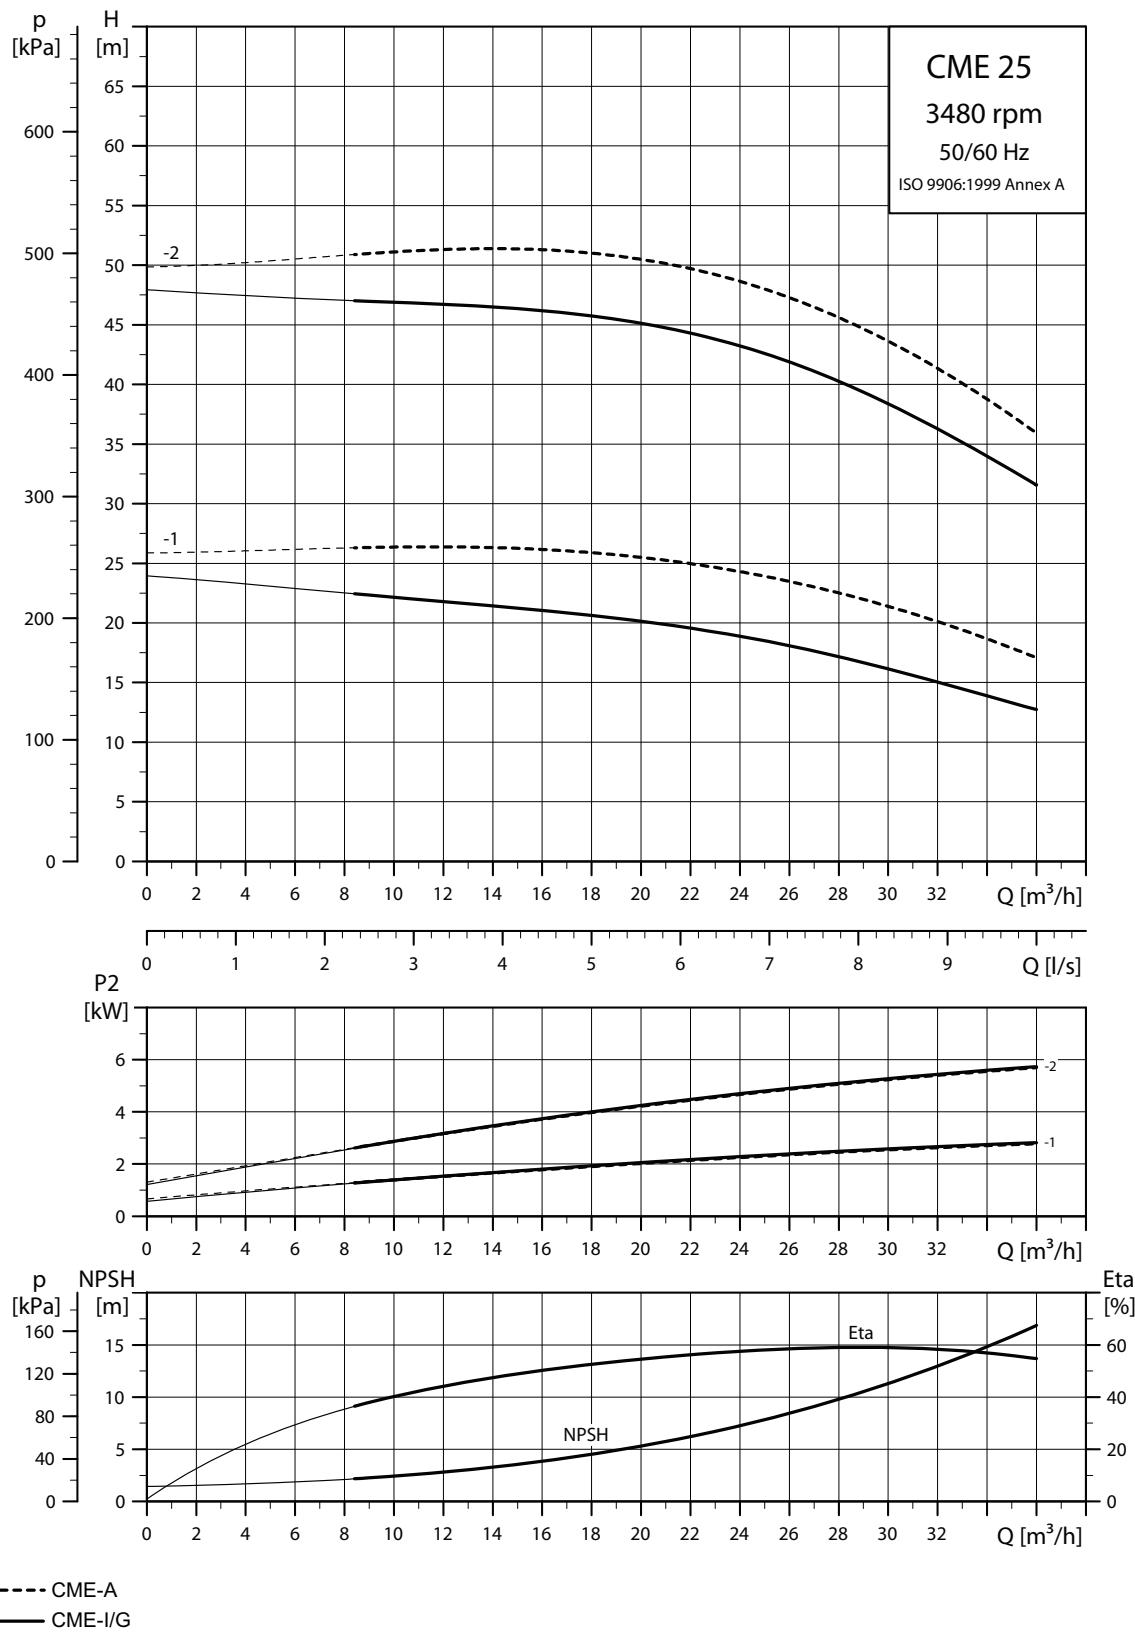
**CME 25**

**Note:** Irrespective of the input frequency, the 100 % speed of CME pumps is approximately  $3400 \text{ min}^{-1}$ .

## 19. Dimensions, CM 50 Hz

### CM 1-A

(A = cast iron EN-GJL-200)

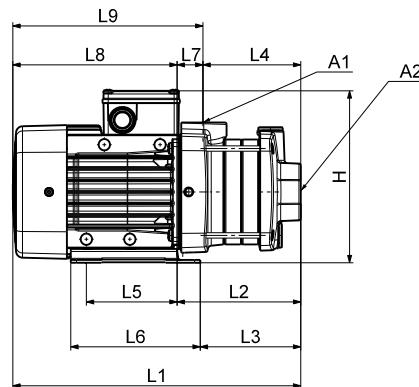

TM0422482208

#### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	288	114	89	86	96	137	28	174	202
CM1-3	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	306	132	107	104	96	137	28	174	202
CM1-4	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	324	150	125	122	96	137	28	174	202
CM1-5	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	342	168	143	140	96	137	28	174	202
CM1-6	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	360	186	161	158	96	137	28	174	202
CM1-7	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	149	378	204	179	176	96	137	28	174	202
CM1-8	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	149	396	222	197	194	96	137	28	174	202

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.3	1"	1"	3/8"	10	142	158	125	208	75	149	288	114	89	86	96	137	28	174	202
CM1-3	71	0.3	1"	1"	3/8"	10	142	158	125	208	75	149	306	132	107	104	96	137	28	174	202
CM1-4	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	324	150	125	122	96	137	28	174	202
CM1-5	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	342	168	143	140	96	137	28	174	202
CM1-6	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	360	186	161	158	96	137	28	174	202
CM1-7	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	378	204	179	176	96	137	28	174	202
CM1-8	80	0.67	1"	1"	3/8"	10	142	158	125	208	75	149	436	222	197	194	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

## CM 1-I and CM 1-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

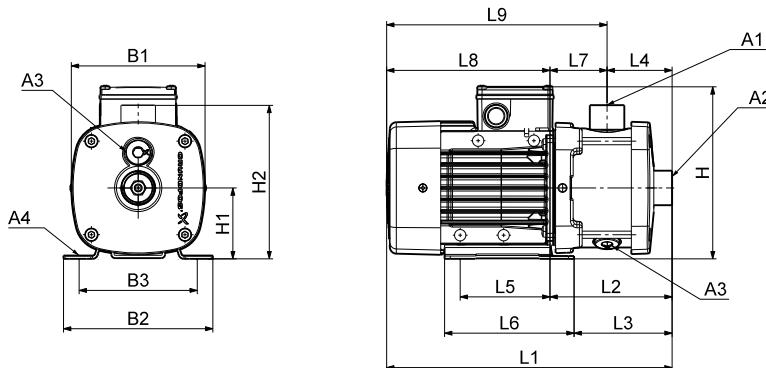

TM04 2246 2208

### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM1-3	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM1-4	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	323	149	125	90	96	137	60	174	234
CM1-5	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	341	167	143	108	96	137	60	174	234
CM1-6	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	377	203	179	144	96	137	60	174	234
CM1-7	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	165	377	203	179	144	96	137	60	174	234
CM1-8	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	165	413	239	215	180	96	137	60	174	234
CM1-9	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	165	413	239	215	180	96	137	60	174	234
CM1-10	80	0.85	1"	1"	3/8"	10	142	158	125	184	75	165	489	275	251	216	96	137	60	214	274
CM1-11	80	0.85	1"	1"	3/8"	10	142	158	125	184	75	165	489	275	251	216	96	137	60	214	274
CM1-12	80	0.85	1"	1"	3/8"	10	142	158	125	184	75	165	543	329	305	270	96	137	60	214	274
CM1-13	80	1.2	1"	1"	3/8"	10	142	158	125	184	75	165	563	329	305	270	96	137	60	234	294
CM1-14	80	1.2	1"	1"	3/8"	10	142	158	125	184	75	165	563	329	305	270	96	137	60	234	294

All dimensions are in mm unless otherwise stated.



**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.3	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM1-3	71	0.3	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM1-4	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	323	149	125	90	96	137	60	174	234
CM1-5	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	341	167	143	108	96	137	60	174	234
CM1-6	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	377	203	179	144	96	137	60	174	234
CM1-7	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	377	203	179	144	96	137	60	174	234
CM1-8	80	0.67	1"	1"	3/8"	10	142	158	125	208	75	165	453	239	215	180	96	137	60	214	274
CM1-9	80	0.67	1"	1"	3/8"	10	142	158	125	208	75	165	453	239	215	180	96	137	60	214	274
CM1-10	80	0.67	1"	1"	3/8"	10	142	158	125	208	75	165	489	275	251	216	96	137	60	214	274
CM1-11	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	165	489	275	251	216	96	137	60	214	274
CM1-12	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	165	543	329	305	270	96	137	60	214	274
CM1-13	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	165	543	329	305	270	96	137	60	214	274
CM1-14	90	1.3	1"	1"	3/8"	10	178	178	140	229	90	180	593	369	354	270	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

**CM 3-A**

(A = cast iron EN-GJL-200)

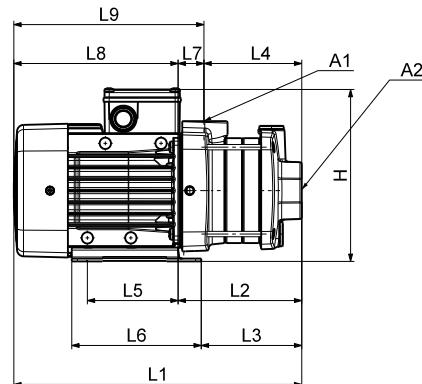

TM04 2248 2208

**Dimensions****3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	288	114	89	86	96	137	28	174	202
CM3-3	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	306	132	107	104	96	137	28	174	202
CM3-4	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	149	324	150	125	122	96	137	28	174	202
CM3-5	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	149	342	168	143	140	96	137	28	174	202
CM3-6	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	149	360	186	161	158	96	137	28	174	202
CM3-7	80	0.85	1"	1"	3/8"	10	142	158	125	184	75	149	418	204	179	176	96	137	28	214	242
CM3-8	80	1.2	1"	1"	3/8"	10	142	158	125	184	75	149	456	222	197	194	96	137	28	234	262

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.3	1"	1"	3/8"	10	142	158	125	208	75	149	288	114	89	86	96	137	28	174	202
CM3-3	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	306	132	107	104	96	137	28	174	202
CM3-4	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	324	150	125	122	96	137	28	174	202
CM3-5	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	149	342	168	143	140	96	137	28	174	202
CM3-6	80	0.67	1"	1"	3/8"	10	142	158	125	208	75	149	400	186	161	158	96	137	28	214	242
CM3-7	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	149	418	204	179	176	96	137	28	214	242
CM3-8	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	149	436	222	197	194	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

## CM 3-I and CM 3-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

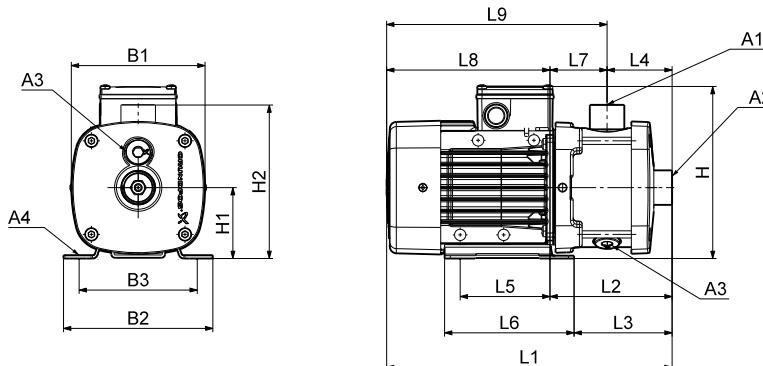

TM04 2246 2208

### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM3-3	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM3-4	71	0.46	1"	1"	3/8"	10	142	158	125	184	75	165	323	149	125	90	96	137	60	174	234
CM3-5	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	165	341	167	143	108	96	137	60	174	234
CM3-6	71	0.65	1"	1"	3/8"	10	142	158	125	184	75	165	377	203	179	144	96	137	60	174	234
CM3-7	80	0.85	1"	1"	3/8"	10	142	158	125	184	75	165	417	203	179	144	96	137	60	214	274
CM3-8	80	1.2	1"	1"	3/8"	10	142	158	125	184	75	165	473	239	215	180	96	137	60	234	294
CM3-9	80	1.2	1"	1"	3/8"	10	142	158	125	184	75	165	473	239	215	180	96	137	60	234	294
CM3-10	80	1.2	1"	1"	3/8"	10	142	158	125	184	75	165	509	275	251	216	96	137	60	234	294
CM3-11	90	1.58	1"	1"	3/8"	10	178	178	140	200	90	180	539	315	300	216	125	155	99	224	323
CM3-12	90	1.58	1"	1"	3/8"	10	178	178	140	200	90	180	593	369	354	270	125	155	99	224	323
CM3-13	90	1.58	1"	1"	3/8"	10	178	178	140	200	90	180	593	369	354	270	125	155	99	224	323
CM3-14	90	2.2	1"	1"	3/8"	10	178	178	140	200	90	180	633	369	354	270	125	155	99	264	363

All dimensions are in mm unless otherwise stated.



**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.3	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM3-3	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM3-4	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	323	149	125	90	96	137	60	174	234
CM3-5	71	0.5	1"	1"	3/8"	10	142	158	125	208	75	165	341	167	143	108	96	137	60	174	234
CM3-6	80	0.67	1"	1"	3/8"	10	142	158	125	208	75	165	417	203	179	144	96	137	60	214	274
CM3-7	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	165	417	203	179	144	96	137	60	214	274
CM3-8	80	0.9	1"	1"	3/8"	10	142	158	125	208	75	165	453	239	215	180	96	137	60	214	274
CM3-9	90	1.3	1"	1"	3/8"	10	178	178	140	229	90	180	503	279	264	180	125	155	99	224	323
CM3-10	90	1.3	1"	1"	3/8"	10	178	178	140	229	90	180	539	315	300	216	125	155	99	224	323
CM3-11	90	1.3	1"	1"	3/8"	10	178	178	140	229	90	180	539	315	300	216	125	155	99	224	323
CM3-12	90	1.3	1"	1"	3/8"	10	178	178	140	229	90	180	593	369	354	270	125	155	99	224	323
CM3-13	90	1.3	1"	1"	3/8"	10	178	178	140	229	90	180	593	369	354	270	125	155	99	224	323
CM3-14	90	1.9	1"	1"	3/8"	10	178	178	140	229	90	180	593	369	354	270	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

**CM 5-A**

(A = cast iron EN-GJL-200)

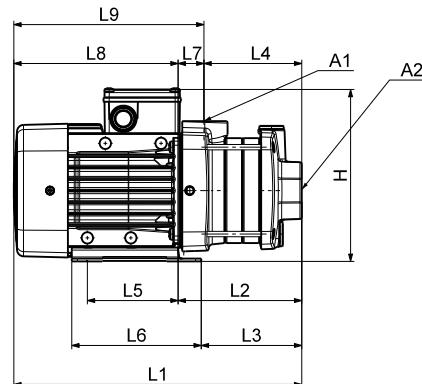

TM04 2248 2208

**Dimensions****3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.46	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	288	114	89	86	96	137	28	174	202
CM5-3	71	0.65	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	306	132	107	104	96	137	28	174	202
CM5-4	80	0.85	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	364	150	125	122	96	137	28	214	242
CM5-5	80	1.2	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	402	168	143	140	96	137	28	234	262
CM5-6	80	1.2	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	420	186	161	158	96	137	28	234	262
CM5-7	90	1.58	1"	1 1/4"	3/8"	10	178	178	140	200	90	201	468	244	229	162	125	155	82	224	306
CM5-8	90	1.58	1"	1 1/4"	3/8"	10	178	178	140	200	90	201	486	262	247	180	125	155	82	224	306

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.5	1"	1 1/4"	3/8"	10	142	158	125	208	75	149	288	114	89	86	96	137	28	174	202
CM5-3	71	0.5	1"	1 1/4"	3/8"	10	142	158	125	208	75	149	306	132	107	104	96	137	28	174	202
CM5-4	80	0.67	1"	1 1/4"	3/8"	10	142	158	125	208	75	149	364	150	125	122	96	137	28	214	242
CM5-5	80	0.9	1"	1 1/4"	3/8"	10	142	158	125	208	75	149	382	168	143	140	96	137	28	214	242
CM5-6	90	1.3	1"	1 1/4"	3/8"	10	178	178	140	229	90	201	450	226	211	144	125	155	82	224	306
CM5-7	90	1.3	1"	1 1/4"	3/8"	10	178	178	140	229	90	201	468	244	229	162	125	155	82	224	306
CM5-8	90	1.3	1"	1 1/4"	3/8"	10	178	178	140	229	90	201	486	262	247	180	125	155	82	224	306

All dimensions are in mm unless otherwise stated.

## CM 5-I and CM 5-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

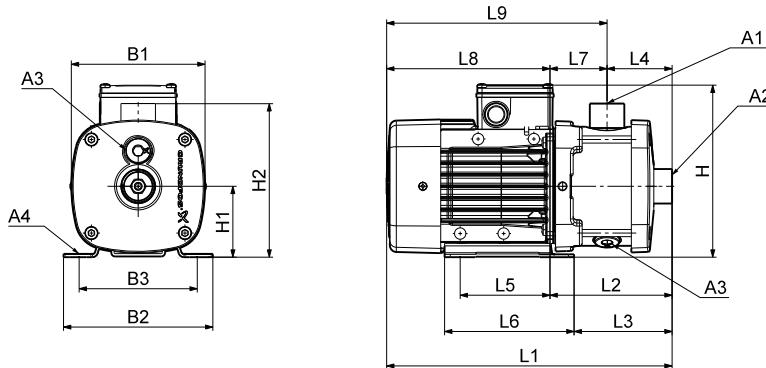

TM04 2246 2208

### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.46	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM5-3	71	0.65	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM5-4	80	0.85	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	363	149	125	90	96	137	60	214	274
CM5-5	80	1.2	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	401	167	143	108	96	137	60	234	294
CM5-6	80	1.2	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	437	203	179	144	96	137	60	234	294
CM5-7	90	1.58	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	467	243	228	144	125	155	99	224	323
CM5-8	90	1.58	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	503	279	264	180	125	155	99	224	323
CM5-9	90	2.2	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	543	279	264	180	125	155	99	264	363
CM5-10	90	2.2	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	579	315	300	216	125	155	99	264	363
CM5-11	90	2.2	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	579	315	300	216	125	155	99	264	363
CM5-12	100	3.2	1"	1 1/4"	3/8"	12	198	199	160	220	100	190	651	379	364	270	140	170	109	272	381
CM5-13	100	3.2	1"	1 1/4"	3/8"	12	198	199	160	220	100	190	651	379	364	270	140	170	109	272	381

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.5	1"	1 1/4"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM5-3	71	0.5	1"	1 1/4"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM5-4	80	0.67	1"	1 1/4"	3/8"	10	142	158	125	208	75	165	363	149	125	90	96	137	60	214	274
CM5-5	80	0.9	1"	1 1/4"	3/8"	10	142	158	125	208	75	165	381	167	143	108	96	137	60	214	274
CM5-6	90	1.3	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	467	243	228	144	125	155	99	224	323
CM5-7	90	1.3	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	467	243	228	144	125	155	99	224	323
CM5-8	90	1.3	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	503	279	264	180	125	155	99	224	323
CM5-9	90	1.9	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	539	315	300	216	125	155	99	224	323
CM5-10	90	1.9	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	539	315	300	216	125	155	99	224	323
CM5-11	90	1.9	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	539	315	300	216	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

**CM 10-A**

(A = cast iron EN-GJL-200)

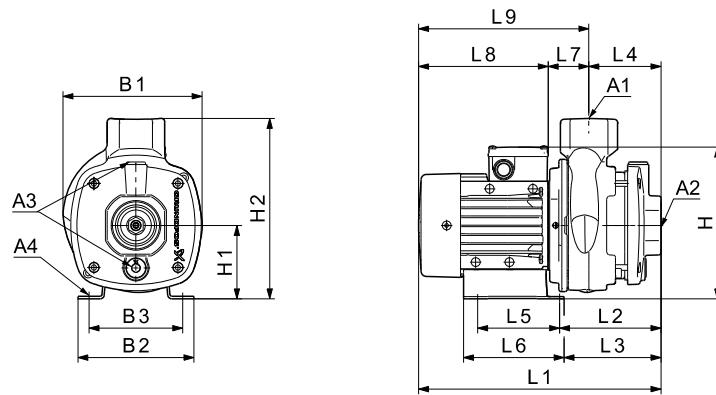

TM04 6111 4009

**Dimensions****3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	71	0.65	1 1/2"	1 1/2"	3/8"	10.2	190	158	125	209	100	245	329	155	131	97	96	137	58	174	232
CM10-2	80	1.2	1 1/2"	1 1/2"	3/8"	10.2	190	158	125	209	100	245	389	155	131	97	96	137	58	234	292
CM10-3	90	2.2	1 1/2"	1 1/2"	3/8"	10.2	190	199	160	210	100	245	491	220	205	127	140	170	93	272	364
CM10-4	100	3.2	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	245	537	265	250	157	140	170	108	272	380
CM10-5	100	3.2	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	245	567	295	280	187	140	170	108	272	380

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	0.67	1 1/2"	1 1/2"	3/8"	10.2	190	158	125	233	100	245	369	155	131	97	96	137	58	214	272
CM10-2	90	1.3	1 1/2"	1 1/2"	3/8"	10.2	190	199	160	239	100	245	421	190	175	97	140	170	93	232	324
CM10-3	90	1.9	1 1/2"	1 1/2"	3/8"	10.2	190	199	160	239	100	245	451	220	205	127	140	170	93	232	324

All dimensions are in mm unless otherwise stated.

## CM 10-I and CM 10-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

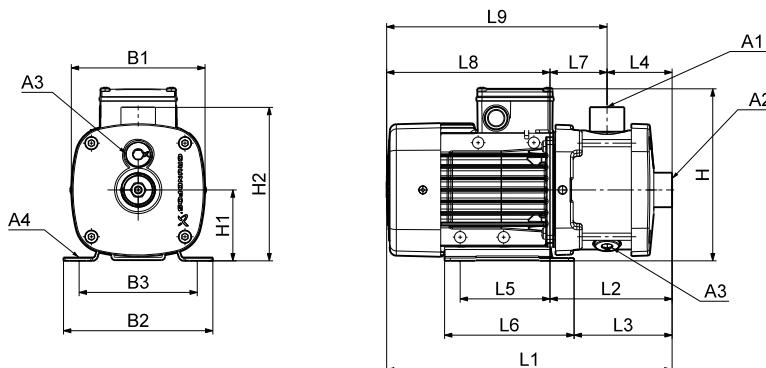

TM04 2246 2208

### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	71	0.65	1 1/2"	1 1/2"	3/8"	10.2	180	158	125	209	100	218	359	185	161	105	96	137	80	174	254
CM10-2	80	1.2	1 1/2"	1 1/2"	3/8"	10.2	180	158	125	209	100	218	419	185	161	105	96	137	80	234	314
CM10-3	90	2.2	1 1/2"	1 1/2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM10-4	100	3.2	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	218	537	265	250	135	140	170	130	272	402
CM10-5	100	3.2	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	218	597	325	310	195	140	170	130	272	402
CM10-6	100	4.0	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	218	597	325	310	195	140	170	130	272	402
CM10-7	132	5.8	1 1/2"	1 1/2"	3/8"	12.0	220	228	190	246	112	230	709	407	391	255	140	172	152	302	454
CM10-8	132	5.8	1 1/2"	1 1/2"	3/8"	12.0	220	228	190	246	112	230	709	407	391	255	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

Please note that the dimension H is smaller than H2 for CM 10-1, CM 10-2 and CM 10-3.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	0.67	1 1/2"	1 1/2"	3/8"	10.2	180	158	125	233	100	218	399	185	161	105	96	137	80	214	294
CM10-2	90	1.3	1 1/2"	1 1/2"	3/8"	10.2	180	199	160	239	100	218	450	219	204	105	140	170	114	232	345
CM10-3	90	1.9	1 1/2"	1 1/2"	3/8"	10.2	180	199	160	239	100	218	450	219	204	105	140	170	114	232	345

All dimensions are in mm unless otherwise stated.

**CM 15-A**

(A = cast iron EN-GJL-200)

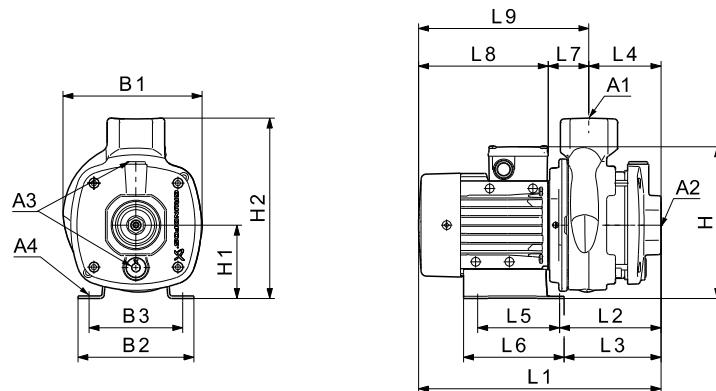

TM04 6111 4909

**Dimensions****3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM15-1	80	1.2	2"	2"	3/8"	10.2	190	158	125	209	100	245	389	155	131	97	96	137	58	234	292
CM15-2	90	2.2	2"	2"	3/8"	10.2	190	199	160	210	100	245	461	190	175	97	140	170	93	272	364
CM15-3	100	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	245	507	235	220	127	140	170	108	272	380
CM15-4	132	5.8	2"	2"	3/8"	12.0	220	228	190	246	112	257	590	288	272	157	140	172	131	302	433

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM15-1	90	1.3	2"	2"	3/8"	10.2	190	199	160	239	100	245	421	190	175	97	140	170	93	232	324
CM15-2	90	1.9	2"	2"	3/8"	10.2	190	199	160	239	100	245	421	190	175	97	140	170	93	232	324

All dimensions are in mm unless otherwise stated.

## CM 15-I and CM 15-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

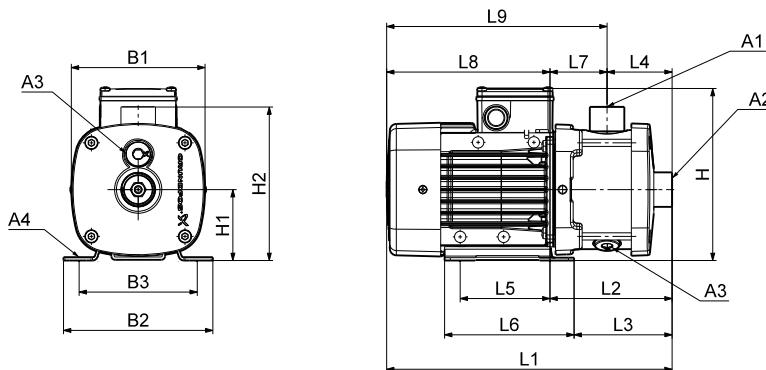

TM04 2246 2208

### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6			
CM15-1	80	1.2	2"	2"	3/8"	10.2	180	158	125	209	100	218	419	185	161	105	96	137	80	234	314
CM15-2	90	2.2	2"	2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM15-3	100	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM15-4	132	5.8	2"	2"	3/8"	12.0	220	228	190	246	112	230	589	287	271	135	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

Please note that the dimension H is smaller than H2 for CM 15-1 and CM 15-2.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6			
CM15-1	90	1.3	2"	2"	3/8"	10.2	180	199	160	239	100	218	450	219	204	105	140	170	114	232	345
CM15-2	90	1.9	2"	2"	3/8"	10.2	180	199	160	239	100	218	450	219	204	105	140	170	114	232	345

All dimensions are in mm unless otherwise stated.

**CM 25-A**

(A = cast iron EN-GJL-200)

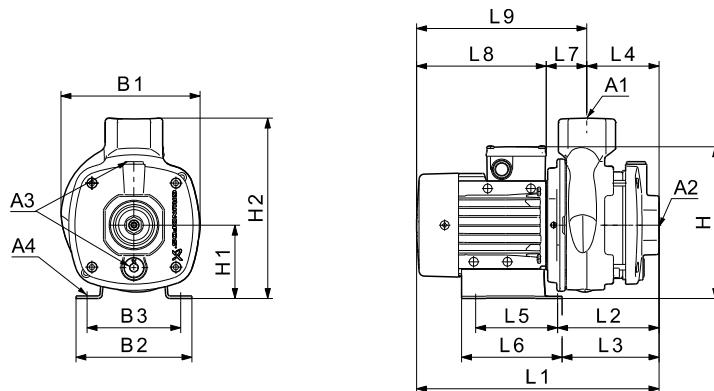

TM04 6111 4909

**Dimensions****3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	90	2.2	2"	2"	3/8"	10.2	190	199	160	210	100	245	461	190	175	97	140	170	93	272	364
CM25-2	100	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	245	477	205	190	97	140	170	108	272	380
CM25-3	132	5.8	2"	2"	3/8"	12.0	220	228	190	246	112	257	560	258	242	127	140	172	131	302	433
CM25-4	132	7.4	2"	2"	3/8"	12.0	220	228	190	246	112	257	590	288	272	157	140	172	131	302	433

All dimensions are in mm unless otherwise stated.


**1 x 220-240 V, 50 Hz (supply voltage C)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	90	1.9	2"	2"	3/8"	10.2	190	199	160	239	100	245	421	190	175	97	140	170	93	232	324

All dimensions are in mm unless otherwise stated.

## CM 25-I and CM 25-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

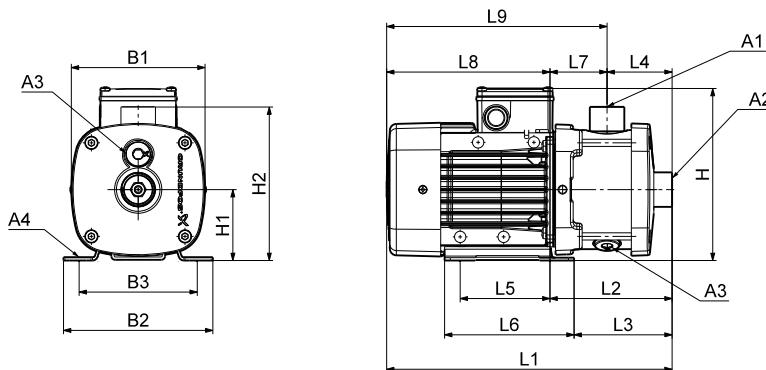

TM04 2246 2208

### Dimensions

**3 x 220-240/380-415 V, 50 Hz (supply voltage F)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	90	2.2	2"	2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM25-2	100	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM25-3	132	5.8	2"	2"	3/8"	12.0	220	228	190	246	112	230	559	257	241	105	140	172	152	302	454
CM25-4	132	7.4	2"	2"	3/8"	12.0	220	228	190	246	112	230	589	287	271	135	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

Please note that the dimension H is smaller than H2 for CM 25-1.

**1 x 220-240 V, 50 Hz (supply voltage C)**


Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	90	1.9	2"	2"	3/8"	10.2	180	199	160	239	100	218	450	219	204	105	140	170	114	232	345

All dimensions are in mm unless otherwise stated.

## 20. Dimensions, CM 60 Hz and 50/60 Hz

### CM 1-A

(A = cast iron EN-GJL-200)

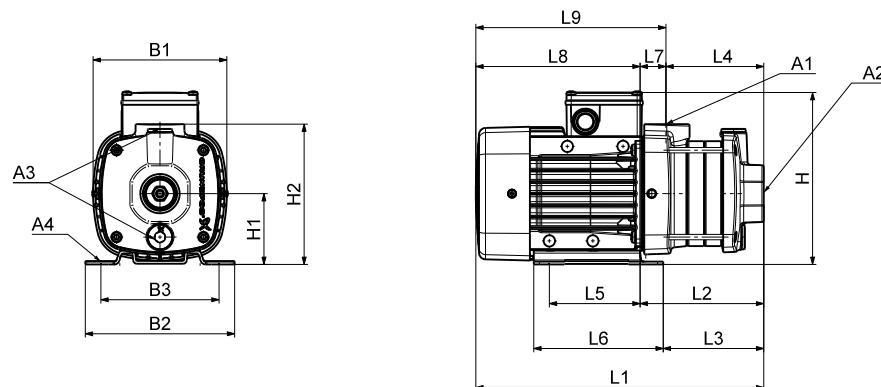

TM04 22482208

#### Dimensions

3 x 208-230/440-480 V, 60 Hz (supply voltage E)

3 x 575 V, 60 Hz (supply voltage H)

3 x 400 V, 50/60 Hz (supply voltage I)

3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)

3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.25**/0.43	0.43/0.74*	1"	1"	3/8"	10	142	158	125	191	75	149	288	114	89	86	96	137	28	174	202
CM1-3	71	0.25**/0.43	0.43/0.74*	1"	1"	3/8"	10	142	158	125	191	75	149	306	132	107	104	96	137	28	174	202
CM1-4	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	149	324	150	125	122	96	137	28	174	202
CM1-5	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	149	342	168	143	140	96	137	28	174	202

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage O.

\*\* Applies to supply voltage J.

\*\*\* Applies to supply voltage I.

1 x 115/230 V, 60 Hz (supply voltage B)

1 x 220 V, 60 Hz (supply voltage A)

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	149	288	114	89	86	96	137	28	174	202
CM1-3	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	149	306	132	107	104	96	137	28	174	202
CM1-4	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	149	324	150	125	122	96	137	28	174	202
CM1-5	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	149	342	168	143	140	96	137	28	174	202

All dimensions are in mm unless otherwise stated.


3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.25	0.43	1"	1"	3/8"	10	142	158	125	184	75	149	288	114	89	86	96	137	28	174	202
CM1-3	71	0.25	0.43	1"	1"	3/8"	10	142	158	125	184	75	149	306	132	107	104	96	137	28	174	202
CM1-4	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	149	324	150	125	122	96	137	28	174	202
CM1-5	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	149	342	168	143	140	96	137	28	174	202

All dimensions are in mm unless otherwise stated.

## CM 1-I and CM 1-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

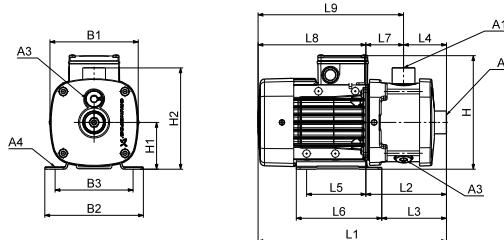

TM04 2246 2208

### Dimensions

**3 x 208-230/440-480 V, 60 Hz (supply voltage E)**

**3 x 575 V, 60 Hz (supply voltage H)**

**3 x 400 V, 50/60 Hz (supply voltage I)**

**3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**

**3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.25**/0.43	0.43/0.74*	1"	1"	3/8"	10	142	158	125	191	75	165	305	131	107	72	96	137	60	174	234
CM1-3	71	0.25**/0.43	0.43/0.74*	1"	1"	3/8"	10	142	158	125	191	75	165	305	131	107	72	96	137	60	174	234
CM1-4	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	165	323	149	125	90	96	137	60	174	234
CM1-5	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	165	341	167	143	108	96	137	60	174	234
CM1-6	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	165	377	203	179	144	96	137	60	174	234
CM1-7	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	165	377	203	179	144	96	137	60	174	234
CM1-8	80	0.6/1.04***	1.04	1"	1"	3/8"	10	142	158	125	191	75	165	453	239	215	180	96	137	60	214	274
CM1-9	80	0.74/1.28***	1.28	1"	1"	3/8"	10	142	158	125	191	75	165	473	239	215	180	96	137	60	234	294

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage O.

\*\* Applies to supply voltage J.

\*\*\* Applies to supply voltage I.

**1 x 115/230 V, 60 Hz (supply voltage B); 1 x 220 V, 60 Hz (supply voltage A)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM1-3	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM1-4	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	165	323	149	125	90	96	137	60	174	234
CM1-5	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	165	341	167	143	108	96	137	60	174	234
CM1-6	80	0.84*/0.78	1"	1"	3/8"	10	142	158	125	208	75	165	417	203	179	144	96	137	60	214	274
CM1-7	80	1.14*/1.10	1"	1"	3/8"	10	205	158	125	208	75	165	417	203	179	144	96	137	60	214	274
CM1-8	80	1.14*/1.10	1"	1"	3/8"	10	205	158	125	208	75	165	453	239	215	180	96	137	60	214	274
CM1-9	80	1.14*/1.10	1"	1"	3/8"	10	205	158	125	208	75	165	453	239	215	180	96	137	60	214	274

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.



**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM1-2	71	0.25	0.43	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM1-3	71	0.25	0.43	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM1-4	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	165	323	149	125	90	96	137	60	174	234
CM1-5	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	165	341	167	143	108	96	137	60	174	234
CM1-6	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	165	377	203	179	144	96	137	60	174	234
CM1-7	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	165	377	203	179	144	96	137	60	174	234
CM1-8	80	0.6	1.04	1"	1"	3/8"	10	142	158	125	184	75	165	453	239	215	180	96	137	60	214	274
CM1-9	80	0.74	1.28	1"	1"	3/8"	10	142	158	125	184	75	165	473	239	215	180	96	137	60	234	294

All dimensions are in mm unless otherwise stated.

**CM 3-A**

(A = cast iron EN-GJL-200)



TM04 2248 2208

**Dimensions****3 x 208-230/440-480 V, 60 Hz (supply voltage E)****3 x 575 V, 60 Hz (supply voltage H)****3 x 400 V, 50/60 Hz (supply voltage I)****3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)****3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	
CM3-2	71	0.25**/0.43	0.43/0.74*	1"	1"	3/8"	10	142	158	125	191	75	149	288	114	89	86	96	137	28	174	202
CM3-3	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	149	306	132	107	104	96	137	28	174	202
CM3-4	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	149	324	150	125	122	96	137	28	174	202
CM3-5	80	0.60/1.04***	1.04	1"	1"	3/8"	10	142	158	125	191	75	149	382	168	143	140	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage O.

\*\* Applies to supply voltage J.

\*\*\* Applies to supply voltage I.

**1 x 115/230 V, 60 Hz (supply voltage B)****1 x 220 V, 60 Hz (supply voltage A)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	149	288	114	89	86	96	137	28	174	202
CM3-3	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	149	306	132	107	104	96	137	28	174	202
CM3-4	80	0.84*/0.78	1"	1"	3/8"	10	142	158	125	208	75	149	364	150	125	122	96	137	28	214	242
CM3-5	80	1.14*/1.10	1"	1"	3/8"	10	205	158	125	208	75	149	382	168	143	140	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.


**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	
CM3-2	71	0.25	0.43	1"	1"	3/8"	10	142	158	125	184	75	149	288	114	89	86	96	137	28	174	202
CM3-3	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	149	306	132	107	104	96	137	28	174	202
CM3-4	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	149	324	150	125	122	96	137	28	174	202
CM3-5	80	0.6	1.04	1"	1"	3/8"	10	142	158	125	184	75	149	382	168	143	140	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

## CM 3-I and CM 3-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

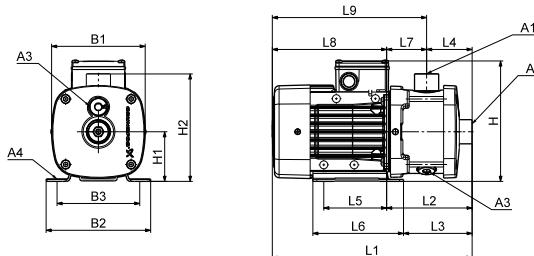

TM04 2246 2208

### Dimensions

**3 x 208-230/440-480 V, 60 Hz (supply voltage E); 3 x 575 V, 60 Hz (supply voltage H)**  
**3 x 400 V, 50/60 Hz (supply voltage I); 3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**  
**3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.25**/0.43	0.43/0.74*	1"	1"	3/8"	10	142	158	125	191	75	165	305	131	107	72	96	137	60	174	234
CM3-3	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	165	305	131	107	72	96	137	60	174	234
CM3-4	71	0.43/0.74***	0.74	1"	1"	3/8"	10	142	158	125	191	75	165	323	149	125	90	96	137	60	174	234
CM3-5	80	0.6*/1.04***/1.45**	1.04/2.5**	1"	1"	3/8"	10	142	158	125	191	75	165	381	167	143	108	96	137	60	214	274
CM3-6	80	0.74/1.28***	1.28	1"	1"	3/8"	10	142	158	125	191	75	165	437	203	179	144	96	137	60	234	294
CM3-7	90	1.0/1.7***	1.7	1"	1"	3/8"	10	178	178	140	200	90	180	467	243	228	144	125	155	99	224	323
CM3-8	90	1.45/2.5***	2.5	1"	1"	3/8"	10	178	178	140	200	90	180	543	279	264	180	125	155	99	264	363
CM3-9	90	1.45/2.5***	2.5	1"	1"	3/8"	10	178	178	140	200	90	180	543	279	264	180	125	155	99	264	363

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage O.

\*\* Applies to supply voltage J.

\*\*\* Applies to supply voltage I.

CM 3-7, CM 3-8 and CM 3-9 are not available with supply voltage O.

### 1 x 115/230 V, 60 Hz (supply voltage B); 1 x 220 V, 60 Hz (supply voltage A)

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM3-3	71	0.60	1"	1"	3/8"	10	142	158	125	208	75	165	305	131	107	72	96	137	60	174	234
CM3-4	80	0.84*/0.78	1"	1"	3/8"	10	142	158	125	208	75	165	363	149	125	90	96	137	60	214	274
CM3-5	80	1.14*/1.10	1"	1"	3/8"	10	205	158	125	208	75	165	381	167	143	108	96	137	60	214	274
CM3-6	90	1.54*/1.50	1"	1"	3/8"	10	178	178	140	229	90	180	467	243	228	144	125	155	99	224	323
CM3-7	90	1.54*/1.50	1"	1"	3/8"	10	178	178	140	229	90	180	467	243	228	144	125	155	99	224	323
CM3-8	90	1.54*/1.50	1"	1"	3/8"	10	178	178	140	229	90	180	503	279	264	180	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.



### 3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM3-2	71	0.25	0.43	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM3-3	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM3-4	71	0.43	0.74	1"	1"	3/8"	10	142	158	125	184	75	165	323	149	125	90	96	137	60	174	234
CM3-5	80	0.6	1.04	1"	1"	3/8"	10	142	158	125	184	75	165	381	167	143	108	96	137	60	214	274
CM3-6	80	0.74	1.28	1"	1"	3/8"	10	142	158	125	184	75	165	437	203	179	144	96	137	60	234	294
CM3-7	90	1	1.7	1"	1"	3/8"	10	178	178	140	200	90	180	467	243	228	144	125	155	99	224	323
CM3-8	90	1.4	2.5	1"	1"	3/8"	10	178	178	140	200	90	180	543	279	264	180	125	155	99	264	363
CM3-9	90	1.4	2.5	1"	1"	3/8"	10	178	178	140	200	90	180	543	279	264	180	125	155	99	264	363

All dimensions are in mm unless otherwise stated.

**CM 5-A**

(A = cast iron EN-GJL-200)



TM04 248 2208

**Dimensions****3 x 208-230/440-480 V, 60 Hz (supply voltage E)****3 x 575 V, 60 Hz (supply voltage H)****3 x 400 V, 50/60 Hz (supply voltage I)****3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)****3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.43/0.74*	0.74	1"	1 1/4"	3/8"	10	142	158	125	191	75	149	288	114	89	86	96	137	28	174	202
CM5-3	80	0.60/1.04*	1.04	1"	1 1/4"	3/8"	10	142	158	125	191	75	149	346	132	107	104	96	137	28	214	242
CM5-4	90	1.0**/1.7*	1.7	1"	1 1/4"	3/8"	10	178	178	140	200	90	201	414	190	175	108	125	155	82	224	306
CM5-5	90	1.45**/2.5*	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	201	472	208	193	126	125	155	82	264	346

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

\*\* Applies to supply voltage J.

CM 5-4 and CM 5-5 are not available with supply voltage O.

**1 x 115/230 V, 60 Hz (supply voltage B)****1 x 220 V, 60 Hz (supply voltage A)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9		
CM5-2	80	0.84*/0.78	1"	1 1/4"	3/8"	10	142	158	125	208	75	149	328	114	89	86	96	137	28	214	242	
CM5-3	80	1.14*/1.10	1"	1 1/4"	3/8"	10	205	158	125	208	75	149	346	132	107	104	96	137	28	214	242	
CM5-4	90	1.54*/1.50	1"	1 1/4"	3/8"	10	178	178	140	229	90	201	414	190	175	108	125	155	82	224	306	
CM5-5	90	1.50	1"	1 1/4"	3/8"	10	178	178	140	229	90	201	432	208	193	126	125	155	82	224	306	

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.

Note: CM 5-5 is not available with supply voltage A.


**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.43	0.74	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	288	114	89	86	96	137	28	174	202
CM5-3	80	0.6	1.04	1"	1 1/4"	3/8"	10	142	158	125	184	75	149	346	132	107	104	96	137	28	214	242
CM5-4	90	1	1.7	1"	1 1/4"	3/8"	10	178	178	140	200	90	201	414	190	175	108	125	155	82	224	306
CM5-5	90	1.4	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	201	472	208	193	126	125	155	82	264	346

All dimensions are in mm unless otherwise stated.

## CM 5-I and CM 5-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

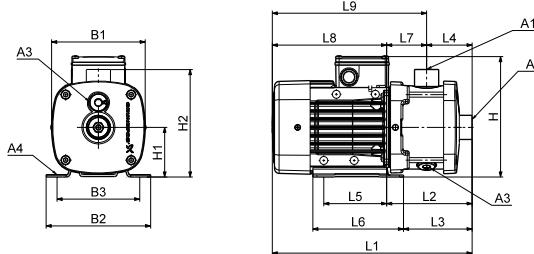

TM04 2246 2208

### Dimensions

**3 x 208-230/440-480 V, 60 Hz (supply voltage E)**

**3 x 575 V, 60 Hz (supply voltage H)**

**3 x 400 V, 50/60 Hz (supply voltage I)**

**3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**

**3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]										Dimensions [mm]										
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	71	0.43/0.74*	0.74	1"	1 1/4"	3/8"	10	142	158	125	191	75	165	305	131	107	72	96	137	60	174	234
CM5-3	80	0.6/1.04*	1.04	1"	1 1/4"	3/8"	10	142	158	125	191	75	165	345	131	107	72	96	137	60	214	274
CM5-4	90	1.0/1.7*	1.7	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	413	189	174	90	125	155	99	224	323
CM5-5	90	1.45/2.5*	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	471	207	192	108	125	155	99	264	363
CM5-6	90	1.45/2.5*	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	507	243	228	144	125	155	99	264	363
CM5-7	90	1.45/2.5*	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	507	243	228	144	125	155	99	264	363
CM5-8	100	2.36/4.0*	4	1"	1 1/4"	3/8"	12	198	199	160	220	100	190	561	289	274	180	140	170	109	272	381

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

Note: CM 5-4, CM 5-5, CM 5-6, CM 5-7 and CM 5-8 are not available with supply voltage O.

**1 x 115/230 V, 60 Hz (supply voltage B)**

**1 x 220 V, 60 Hz (supply voltage A)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM5-2	80	0.84*/0.78	1"	1 1/4"	3/8"	10	142	158	125	208	75	165	345	131	107	72	96	137	60	214	274
CM5-3	80	1.14*/1.10	1"	1 1/4"	3/8"	10	205	158	125	208	75	165	345	131	107	72	96	137	60	214	274
CM5-4	90	1.54*/1.50	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	413	189	174	90	125	155	99	224	323
CM5-5	90	1.50	1"	1 1/4"	3/8"	10	178	178	140	229	90	180	431	207	192	108	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.

Note: CM 5-5 is not available with supply voltage A.


**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																			
			50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8
CM5-2	71	0.43	0.74	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	305	131	107	72	96	137	60	174	234
CM5-3	80	0.6	1.04	1"	1 1/4"	3/8"	10	142	158	125	184	75	165	345	131	107	72	96	137	60	214	274
CM5-4	90	1	1.7	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	413	189	174	90	125	155	99	224	323
CM5-5	90	1.4	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	471	207	192	108	125	155	99	264	363
CM5-6	90	1.4	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	507	243	228	144	125	155	99	264	363
CM5-7	90	1.4	2.5	1"	1 1/4"	3/8"	10	178	178	140	200	90	180	507	243	228	144	125	155	99	264	363
CM5-8	100	2.3	4.0	1"	1 1/4"	3/8"	12	198	199	160	220	100	190	561	289	274	180	140	170	109	272	381

All dimensions are in mm unless otherwise stated.

**CM 10-A**

(A = cast iron EN-GJL-200)

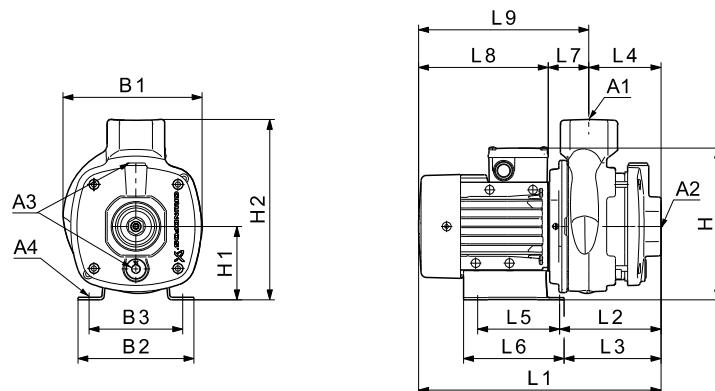

TM04 61114909

**Dimensions****3 x 208-230/440-480 V, 60 Hz (supply voltage E)****3 x 575 V, 60 Hz (supply voltage H)****3 x 400 V, 50/60 Hz (supply voltage I)****3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)****3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	0.74/1.28*	1.28	1 1/2"	1 1/2"	3/8"	10.2	190	158	125	216	100	245	389	155	131	97	96	137	58	234	292
CM10-2	90	1.45/2.5*	2.5	1 1/2"	1 1/2"	3/8"	10.2	190	199	160	210	100	245	461	190	175	97	140	170	93	272	364
CM10-3	100	2.36/4.0*	4	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	245	507	235	220	127	140	170	108	272	380

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

**1 x 115/230 V, 60 Hz (supply voltage B)****1 x 220 V, 60 Hz (supply voltage A)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	1.14*/1.10	1 1/2"	1 1/2"	3/8"	10.2	205	158	125	233	100	245	369	155	131	97	96	137	58	214	272

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.


**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]				Dimensions [mm]																
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	0.74	1.28	1 1/2"	1 1/2"	3/8"	10.2	190	158	125	209	100	245	389	155	131	97	96	137	58	234	292
CM10-2	90	1.4	2.5	1 1/2"	1 1/2"	3/8"	10.2	190	199	160	210	100	245	461	190	175	97	140	170	93	272	364
CM10-3	100	2.3	4.0	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	245	507	235	220	127	140	170	108	272	380

All dimensions are in mm unless otherwise stated.

## CM 10-I and CM 10-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

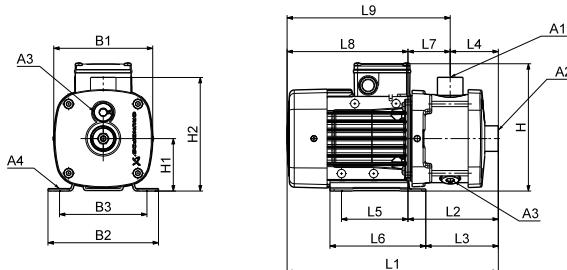

TM04 2246 2208

### Dimensions

**3 x 208-230/440-480 V, 60 Hz (supply voltage E)**

**3 x 575 V, 60 Hz (supply voltage H)**

**3 x 400 V, 50/60 Hz (supply voltage I)**

**3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**

**3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	0.74/1.28*	1.28	1 1/2"	1 1/2"	3/8"	10.2	180	158	125	216	100	218	399	185	161	105	96	137	80	214	294
CM10-2	90	1.45/2.5*	2.5	1 1/2"	1 1/2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM10-3	100	2.36/4.0*	4	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM10-4	132	4.2/6.2*	6.2	1 1/2"	1 1/2"	3/8"	12.0	220	228	190	246	112	230	589	287	271	135	140	172	152	302	454
CM10-5	132	4.2/6.2*	6.2	1 1/2"	1 1/2"	3/8"	12.0	220	228	190	246	112	230	649	347	331	195	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

**Note:** The dimension H is smaller than H2 for CM 10-1 and CM 10-2.

**Note:** CM 10-2, CM 10-3, CM 10-4 and CM 10-5 are not available with supply voltage O.

**1 x 115/230 V, 60 Hz (supply voltage B)**

**1 x 220 V, 60 Hz (supply voltage A)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	1.14*/1.10	1 1/2"	1 1/2"	3/8"	10.2	205	158	125	233	100	218	399	185	161	105	96	137	80	214	294

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage A.

**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**


Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM10-1	80	0.74	1.28	1 1/2"	1 1/2"	3/8"	10.2	180	158	125	209	100	218	419	185	161	105	96	137	80	234	314
CM10-2	90	1.4	2.5	1 1/2"	1 1/2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM10-3	100	2.3	4.0	1 1/2"	1 1/2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM10-4	112	3.5	6.2	1 1/2"	1 1/2"	3/8"	12.0	220	228	190	246	112	230	589	287	271	135	140	172	152	302	454
CM10-5	112	3.5	6.2	1 1/2"	1 1/2"	3/8"	12.0	220	228	190	246	112	230	649	347	331	195	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

**Note:** The dimension H is smaller than H2 for CM 10-1 and CM 10-2.

**CM 15-A**

(A = cast iron EN-GJL-200)

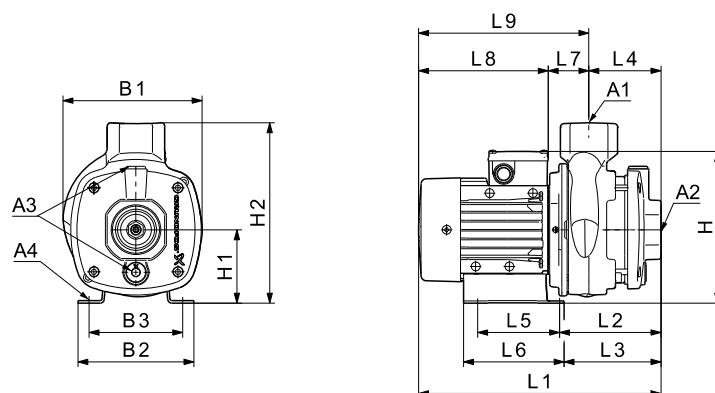

TM04 6-11-4909

**Dimensions****3 x 208-230/440-480 V, 60 Hz (supply voltage E)****3 x 575 V, 60 Hz (supply voltage H)****3 x 400 V, 50/60 Hz (supply voltage I)****3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM15-1	90	1.45/2.5*	2.5	2"	2"	3/8"	10.2	190	199	160	210	100	245	461	190	175	97	140	170	93	272	364
CM15-2	100	2.36/4.0*	4	2"	2"	3/8"	12.0	198	199	160	220	100	245	477	205	190	97	140	170	108	272	380
CM15-3	132	4.2/6.2*	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	257	560	258	242	127	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

Note: CM 15-2 and CM 15-3 are not available with supply voltage O.


**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM15-1	90	1.4	2.5	2"	2"	3/8"	10.2	190	199	160	210	100	245	461	190	175	97	140	170	93	272	364
CM15-2	100	2.3	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	245	477	205	190	97	140	170	108	272	380
CM15-3	112	3.5	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	257	560	258	242	127	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

## CM 15-I and CM 15-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

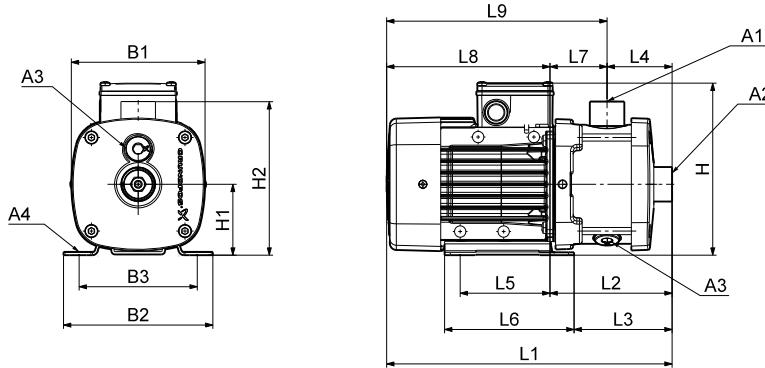

TM04 2246 2208

### Dimensions

**3 x 208-230/440-480 V, 60 Hz (supply voltage E)**

**3 x 575 V, 60 Hz (supply voltage H)**

**3 x 400 V, 50/60 Hz (supply voltage I)**

**3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM15-1	90	1.45/2.5*	2.5	2"	2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM15-2	100	2.36/4.0*	4	2"	2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM15-3	132	4.2/6.2*	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

Note: The dimension H is smaller than H2 for CM 15-1.

CM 15-1, CM 15-2 and CM 15-3 are not available with supply voltage O.

**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**


Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM15-1	90	1.4	2.5	2"	2"	3/8"	10.2	180	199	160	210	100	218	490	219	204	105	140	170	114	272	385
CM15-2	100	2.3	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM15-3	112	3.5	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

Note: The dimension H is smaller than H2 for CM 15-1.

**CM 25-A**

(A = cast iron EN-GJL-200)

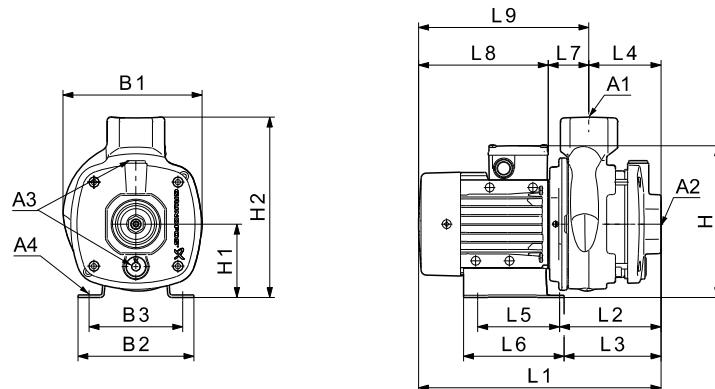

TM04 6-11-4909

**Dimensions****3 x 208-230/440-480 V, 60 Hz (supply voltage E)****3 x 575 V, 60 Hz (supply voltage H)****3 x 400 V, 50/60 Hz (supply voltage I)****3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	100	2.36/4.0*	4	2"	2"	3/8"	12.0	198	199	160	220	100	245	477	205	190	97	140	170	108	272	380
CM25-2	132	4.2/6.2*	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	257	530	228	212	97	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.


**Note:** CM 25-1 and CM 25-2 are not available with supply voltage O.**3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)**

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	100	2.3	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	245	477	205	190	97	140	170	108	272	380
CM25-2	112	3.5	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	257	530	228	212	97	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

## CM 25-I and CM 25-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

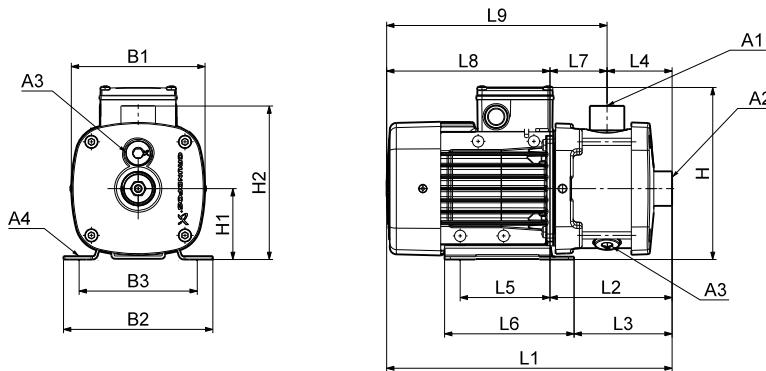

TM04 2246 2208

### Dimensions

3 x 208-230/440-480 V, 60 Hz (supply voltage E)

3 x 575 V, 60 Hz (supply voltage H)

3 x 400 V, 50/60 Hz (supply voltage I)

3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)

Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	100	2.36/4.0*	4	2"	2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM25-2	132	4.2/6.2*	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

\* Applies to supply voltage I.

Note: CM 25-1 and CM 25-2 are not available with supply voltage O.

3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)


Pump type	Frame size	P <sub>2</sub> [kW]								Dimensions [mm]												
		50 Hz	60 Hz	A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CM25-1	100	2.3	4.0	2"	2"	3/8"	12.0	198	199	160	220	100	218	507	235	220	105	140	170	130	272	402
CM25-2	112	3.5	6.2	2"	2"	3/8"	12.0	220	228	190	246	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

## 21. Dimensions, CME 60 Hz and 50/60 Hz

### CME 1-A

(A = cast iron EN-GJL-200)

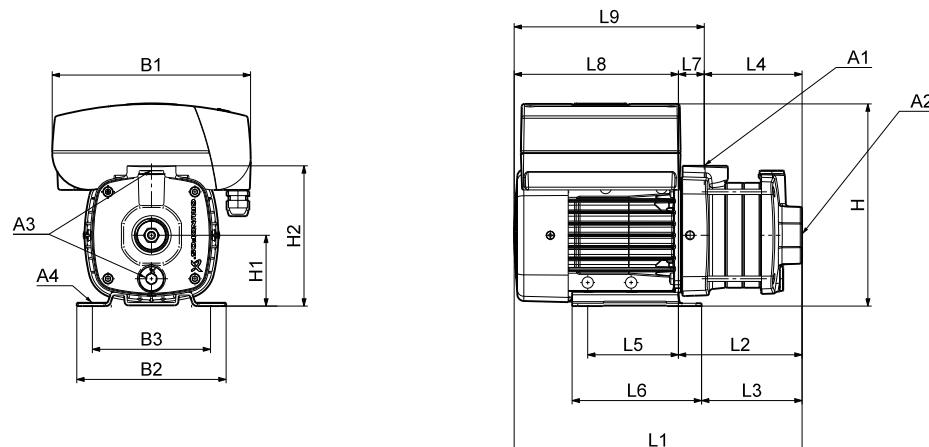

TM04 2249 2208

#### Dimensions

**1 x 200-240 V, 50/60 Hz (supply voltage K)**

**1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	
CME1-2	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	149	288	114	89	86	96	137	28	174	202
CME1-3	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	149	306	132	107	104	96	137	28	174	202
CME1-4	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	149	324	150	125	122	96	137	28	174	202
CME1-5	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	149	382	168	143	140	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pume type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	
CME 1-2	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	149	349	113	89	86	96	137	28	236	263
CME 1-3	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	149	367	131	107	104	96	137	28	236	263
CME 1-4	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	149	385	149	125	122	96	137	28	236	263
CME 1-5	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	149	403	167	143	140	96	137	28	236	263

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	
CME 1-2	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	149	309	113	89	86	96	137	28	196	223
CME 1-3	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	149	327	131	107	104	96	137	28	196	223
CME 1-4	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	149	345	149	125	122	96	137	28	196	223
CME 1-5	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	149	363	167	143	140	96	137	28	196	223

All dimensions are in mm unless otherwise stated.

## CME 1-I and CME 1-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

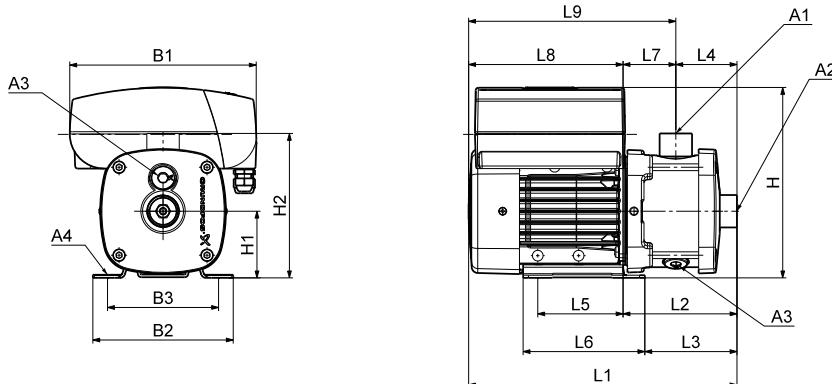

TM04 2247 2208

### Dimensions

**1 x 200-240 V, 50/60 Hz (supply voltage K)**  
**1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME1-2	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	165	305	131	107	72	96	137	60	174	234
CME1-3	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	165	305	131	107	72	96	137	60	174	234
CME1-4	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	165	323	149	125	90	96	137	60	174	234
CME1-5	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	381	167	143	108	96	137	60	214	274
CME1-6	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	417	203	179	144	96	137	60	214	274
CME1-7	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	417	203	179	144	96	137	60	214	274
CME1-8	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	453	239	215	180	96	137	60	214	274

All dimensions are in mm unless otherwise stated.

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME1-9	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	503	279	264	180	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME1-9	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	503	279	264	180	125	155	99	224	323

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 1-2	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	165	366	130	106	72	96	137	59	236	294
CME 1-3	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	165	366	130	106	72	96	137	59	236	294
CME 1-4	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	165	384	148	124	90	96	137	59	236	294
CME 1-5	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	402	166	142	108	96	137	59	236	294
CME 1-6	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	438	202	178	144	96	137	59	236	294
CME 1-7	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	438	202	178	144	96	137	59	236	294
CME 1-8	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	474	238	214	180	96	137	59	236	294
CME 1-9	90C	1.50	1"	1"	3/8"	10	268	178	140	248	90	180	480	282	267	180	125	155	103	197	300

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]															
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6
CME 1-2	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	165	326	130	106	72	96	137
CME 1-3	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	165	326	130	106	72	96	137
CME 1-4	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	165	344	148	124	90	96	137
CME 1-5	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	362	166	142	108	96	137
CME 1-6	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	398	202	178	144	96	137
CME 1-7	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	398	202	178	144	96	137
CME 1-8	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	434	238	214	180	96	137
CME 1-9	90C	1.50	1"	1"	3/8"	10	212	178	140	248	90	180	440	282	267	180	125	155
																	103	157
																	260	

All dimensions are in mm unless otherwise stated.

**CME 3-A**

(A = cast iron EN-GJL-200)

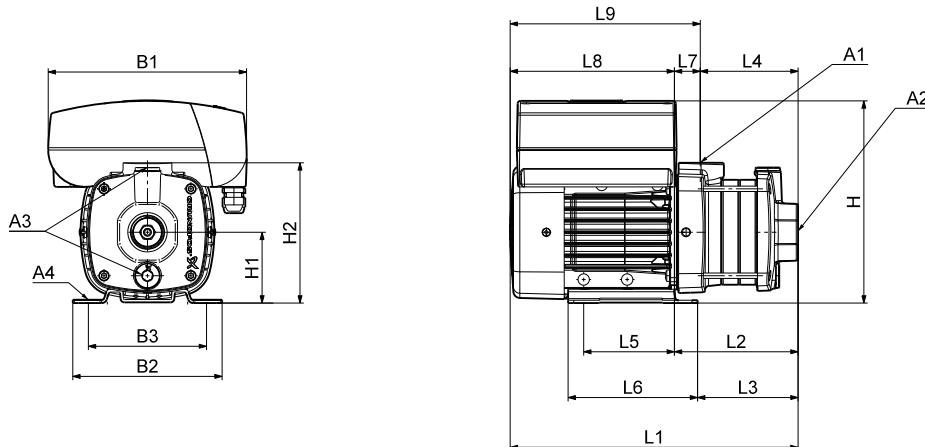

TM04 2249 2208

**Dimensions****1 x 200-240 V, 50/60 Hz (supply voltage K)****1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME3-2	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	149	288	114	89	86	96	137	28	174	202
CME3-3	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	149	346	132	107	104	96	137	28	214	242
CME3-4	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	149	364	150	125	122	96	137	28	214	242
CME3-5	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	149	382	168	143	140	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)****3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 3-2	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	149	349	113	89	86	96	137	28	236	263
CME 3-3	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	149	367	131	107	104	96	137	28	236	263
CME 3-4	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	149	385	149	125	122	96	137	28	236	263
CME 3-5	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	149	403	167	143	140	96	137	28	236	263

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 3-2	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	149	309	113	89	86	96	137	28	196	223
CME 3-3	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	149	327	131	107	104	96	137	28	196	223
CME 3-4	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	149	345	149	125	122	96	137	28	196	223
CME 3-5	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	149	363	167	143	140	96	137	28	196	223

All dimensions are in mm unless otherwise stated.

## CME 3-I and CME 3-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

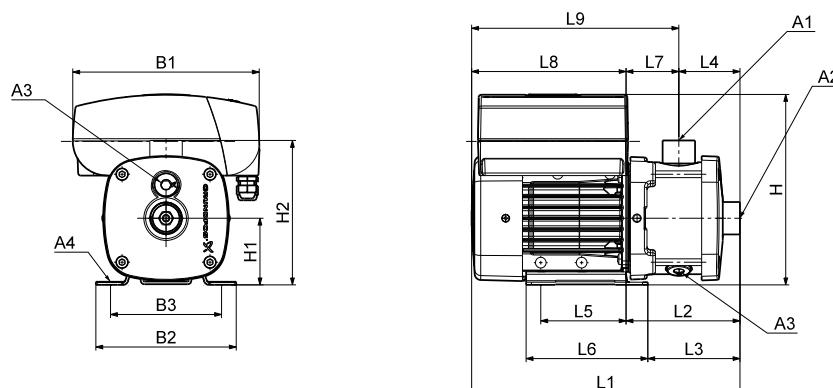

TM04 22472208

### Dimensions

**1 x 200-240 V, 50/60 Hz (supply voltage K)**

**1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME3-2	71	0.55	1"	1"	3/8"	10	210	158	125	215	75	165	305	131	107	72	96	137	60	174	234
CME3-3	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	345	131	107	72	96	137	60	214	274
CME3-4	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	363	149	125	90	96	137	60	214	274
CME3-5	80	1.10	1"	1"	3/8"	10	210	158	125	215	75	165	381	167	143	108	96	137	60	214	274

All dimensions are in mm unless otherwise stated.

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME3-6	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	467	243	228	144	125	155	99	224	323
CME3-7	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	467	243	228	144	125	155	99	224	323
CME3-8	90	2.20	1"	1"	3/8"	10	264	178	140	257	90	180	543	279	264	180	125	155	99	264	363
CME3-9	90	2.20	1"	1"	3/8"	10	264	178	140	257	90	180	543	279	264	180	125	155	99	264	363

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME3-6	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	467	243	228	144	125	155	99	224	323
CME3-7	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	467	243	228	144	125	155	99	224	323
CME3-8	90	1.50	1"	1"	3/8"	10	264	178	140	257	90	180	503	279	264	180	125	155	99	224	323
CME3-9	90	2.20	1"	1"	3/8"	10	264	178	140	257	90	180	543	279	264	180	125	155	99	264	363

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 3-2	71A	0.55	1"	1"	3/8"	10	268	158	125	233	75	165	366	130	106	72	96	137	59	236	294
CME 3-3	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	366	130	106	72	96	137	59	236	294
CME 3-4	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	384	148	124	90	96	137	59	236	294
CME 3-5	80B	1.10	1"	1"	3/8"	10	268	158	125	233	75	165	402	166	142	108	96	137	59	236	294
CME 3-6	90C	1.50	1"	1"	3/8"	10	268	178	140	248	90	180	444	246	231	144	125	155	103	197	300
CME 3-7	90C	1.50	1"	1"	3/8"	10	268	178	140	248	90	180	444	246	231	144	125	155	103	197	300
CME 3-8	90D	2.20	1"	1"	3/8"	10	268	178	140	248	90	180	480	282	267	180	125	155	103	197	300
CME 3-9	90D	2.20	1"	1"	3/8"	10	268	178	140	248	90	180	480	282	267	180	125	155	103	197	300

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 3-2	71A	0.55	1"	1"	3/8"	10	212	158	125	233	75	165	326	130	106	72	96	137	59	196	254
CME 3-3	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	326	130	106	72	96	137	59	196	254
CME 3-4	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	344	148	124	90	96	137	59	196	254
CME 3-5	80B	1.10	1"	1"	3/8"	10	212	158	125	233	75	165	362	166	142	108	96	137	59	196	254
CME 3-6	90C	1.50	1"	1"	3/8"	10	212	178	140	248	90	180	404	246	231	144	125	155	103	157	260
CME 3-7	90C	1.50	1"	1"	3/8"	10	212	178	140	248	90	180	404	246	231	144	125	155	103	157	260

All dimensions are in mm unless otherwise stated.

**CME 5-A**

(A = cast iron EN-GJL-200)

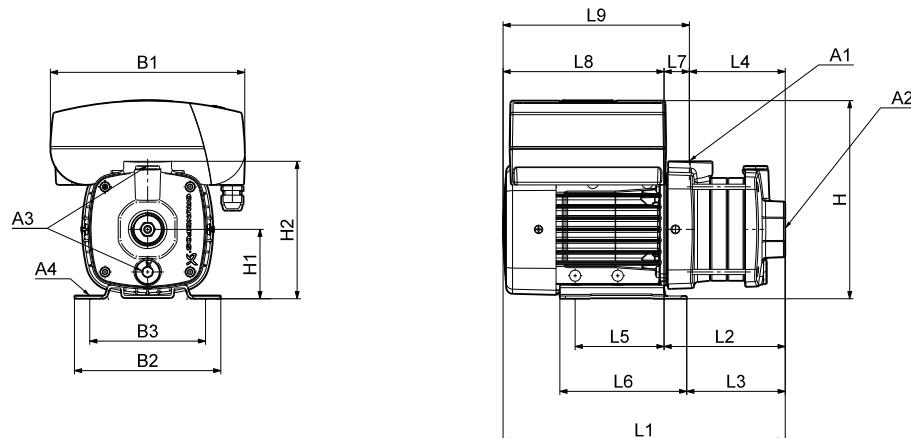

TM04 2249 2208

**Dimensions****1 x 200-240 V, 50/60 Hz (supply voltage K)****1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME5-2	80	1.10	1"	1 1/4"	3/8"	10	210	158	125	215	75	149	328	114	89	86	96	137	28	214	242
CME5-3	80	1.10	1"	1 1/4"	3/8"	10	210	158	125	215	75	149	346	132	107	104	96	137	28	214	242

All dimensions are in mm unless otherwise stated.

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME5-4	90	1.50	1"	1 1/4"	3/8"	10	264	178	140	257	90	201	414	190	175	108	125	155	82	224	306
CME5-5	90	2.20	1"	1 1/4"	3/8"	10	264	178	140	257	90	201	472	208	193	126	125	155	82	264	346

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME5-4	90	1.50	1"	1 1/4"	3/8"	10	264	178	140	257	90	201	414	190	175	108	125	155	82	224	306
CME5-5	90	1.50	1"	1 1/4"	3/8"	10	264	178	140	257	90	201	432	208	193	126	125	155	82	224	306

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)****3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 5-2	80B	1.10	1"	1 1/4"	3/8"	10	268	158	125	233	75	149	349	113	89	86	96	137	28	236	263
CME 5-3	80B	1.10	1"	1 1/4"	3/8"	10	268	158	125	233	75	149	367	131	107	104	96	137	28	236	263
CME 5-4	90C	1.50	1"	1 1/4"	3/8"	10	268	178	140	248	90	201	391	194	179	108	125	155	86	197	283
CME 5-5	90D	2.20	1"	1 1/4"	3/8"	10	268	178	140	248	90	201	423	225	210	140	125	155	86	197	283

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 5-2	80B	1.10	1"	1 1/4"	3/8"	10	212	158	125	233	75	149	309	113	89	86	96	137	28	196	223
CME 5-3	80B	1.10	1"	1 1/4"	3/8"	10	212	158	125	233	75	149	327	131	107	104	96	137	28	196	223
CME 5-4	90C	1.50	1"	1 1/4"	3/8"	10	212	178	140	248	90	201	351	194	179	108	125	155	86	157	243

All dimensions are in mm unless otherwise stated.

## CME 5-I and CME 5-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

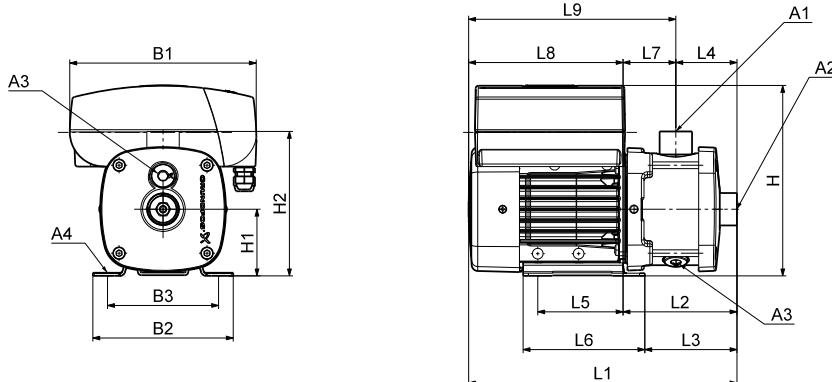

TM04 2247 2208

### Dimensions

**1 x 200-240 V, 50/60 Hz (supply voltage K)**

**1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME5-2	80	1.10	1"	1 1/4"	3/8"	10	210	158	125	215	75	165	345	131	107	72	96	137	60	214	274
CME5-3	80	1.10	1"	1 1/4"	3/8"	10	210	158	125	215	75	165	345	131	107	72	96	137	60	214	274

All dimensions are in mm unless otherwise stated.

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME5-4	90	1.50	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	413	189	174	90	125	155	99	224	323
CME5-5	90	2.20	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	471	207	192	108	125	155	99	264	363
CME5-6	90	2.20	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	507	243	228	144	125	155	99	264	363
CME5-7	100	3.0	1"	1 1/4"	3/8"	12	264	199	160	277	100	190	525	253	238	144	140	170	109	272	381
CME5-8	100	3.0	1"	1 1/4"	3/8"	12	264	199	160	277	100	190	561	289	274	180	140	170	109	272	381

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME5-4	90	1.50	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	413	189	174	90	125	155	99	224	323
CME5-5	90	1.50	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	431	207	192	108	125	155	99	224	323
CME5-6	90	2.20	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	507	243	228	144	125	155	99	264	363
CME5-7	90	2.20	1"	1 1/4"	3/8"	10	264	178	140	257	90	180	507	243	228	144	125	155	99	264	363

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 5-2	80B	1.10	1"	1 1/4"	3/8"	10	268	158	125	233	75	165	366	130	106	72	96	137	59	236	294
CME 5-3	80B	1.10	1"	1 1/4"	3/8"	10	268	158	125	233	75	165	366	130	106	72	96	137	59	236	294
CME 5-4	90C	1.50	1"	1 1/4"	3/8"	10	268	178	140	248	90	180	390	192	177	90	125	155	103	197	300
CME 5-5	90C	1.50	1"	1 1/4"	3/8"	10	268	178	140	248	90	180	408	210	195	108	125	155	103	197	300
CME 5-6	90D	2.20	1"	1 1/4"	3/8"	10	268	178	140	248	90	180	444	246	231	144	125	155	103	197	300
CME 5-7	90D	2.20	1"	1 1/4"	3/8"	10	268	178	140	248	90	180	444	246	231	144	125	155	103	197	300

CME 5-7 is only available for supply voltage T.

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 5-2	80B	1.10	1"	1 1/4"	3/8"	10	212	158	125	233	75	165	326	130	106	72	96	137	59	196	254
CME 5-3	80B	1.10	1"	1 1/4"	3/8"	10	212	158	125	233	75	165	326	130	106	72	96	137	59	196	254
CME 5-4	90C	1.50	1"	1 1/4"	3/8"	10	212	178	140	248	90	180	350	192	177	90	125	155	103	157	260

All dimensions are in mm unless otherwise stated.

## CME 10-A

(A = cast iron EN-GJL-200)

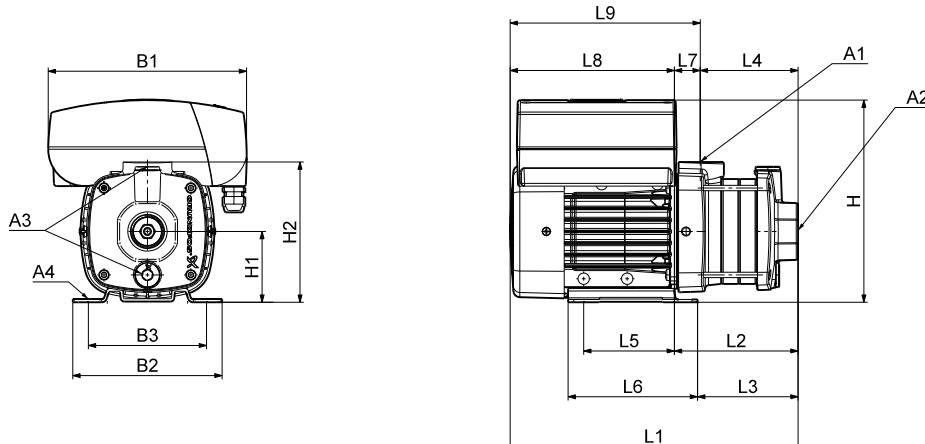

TM04 6110 2208

### Dimensions

**1 x 200-240 V, 50/60 Hz (supply voltage K)**  
**1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME10-1	80	1.10	1 1/2"	1 1/2"	3/8"	10.2	210	158	125	240	100	245	369	155	131	97	96	137	58	214	272

All dimensions are in mm unless otherwise stated.

Note: The dimension H is smaller than H2 for CM 10-1.

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME10-2	90	2.20	1 1/2"	1 1/2"	3/8"	10.2	264	199	160	267	100	245	461	190	175	97	140	170	93	272	364
CME10-3	112	4.0	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	257	560	258	242	127	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME10-2	90	2.20	1 1/2"	1 1/2"	3/8"	10.2	264	199	160	267	100	245	461	190	175	97	140	170	93	272	364
CME10-3	112	4.0	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	257	560	258	242	127	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 10-1	80B	1.10	1 1/2"	1 1/2"	3/8"	10	268	158	125	233	100	245	392	156	131	97	96	137	59	236	295
CME 10-2	90D	2.20	1 1/2"	1 1/2"	3/8"	10	268	199	160	258	100	245	398	190	175	97	140	170	93	208	301

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 10-1	80B	1.10	1 1/2"	1 1/2"	3/8"	10	212	158	125	233	100	245	352	156	131	97	96	137	59	196	255

All dimensions are in mm unless otherwise stated.

## CME 10-I and CME 10-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

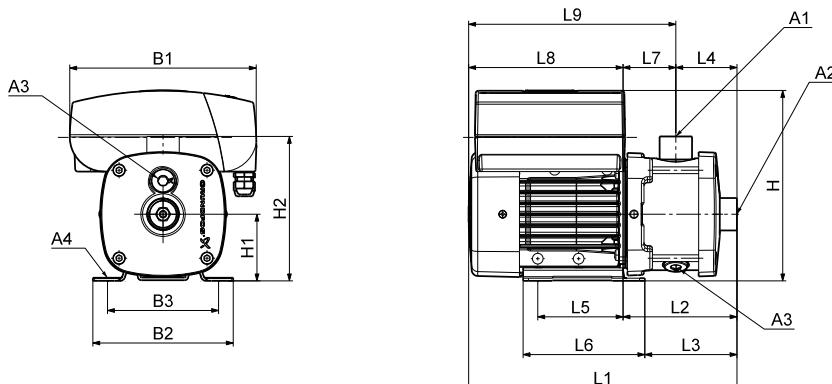

TM04 2247 2208

### Dimensions

**1 x 200-240 V, 50/60 Hz (supply voltage K)**

**1 x 208-230 V, 50/60 Hz (supply voltage M)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME10-1	80	1.10	1 1/2"	1 1/2"	3/8"	10.2	210	158	125	240	100	218	399	185	161	105	96	137	80	214	294

All dimensions are in mm unless otherwise stated.

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME10-2	90	2.20	1 1/2"	1 1/2"	3/8"	10.2	264	199	160	267	100	218	490	219	204	105	140	170	114	272	385
CME10-3	112	4.0	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454
CME10-4	132	5.5	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	230	589	287	271	135	140	172	152	302	454
CME10-5	132	5.5	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	230	649	347	331	195	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME10-2	90	2.20	1 1/2"	1 1/2"	3/8"	10.2	264	199	160	267	100	218	490	219	204	105	140	170	114	272	385
CME10-3	112	4.0	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454
CME10-4	112	4.0	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	230	589	287	271	135	140	172	152	302	454
CME10-5	132	5.5	1 1/2"	1 1/2"	3/8"	12.0	290	228	190	300	112	230	649	347	331	195	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 10-1	80B	1.10	1 1/2"	1 1/2"	3/8"	10	268	158	125	233	100	218	417	181	157	105	96	137	76	236	312
CME 10-2	90D	2.20	1 1/2"	1 1/2"	3/8"	10	268	199	160	258	100	218	424	215	200	105	140	170	110	208	319

All dimensions are in mm unless otherwise stated.


**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 10-1	80B	1.10	1 1/2"	1 1/2"	3/8"	10	212	158	125	233	100	218	377	181	157	105	96	137	76	196	272

All dimensions are in mm unless otherwise stated.

**CME 15-A**

(A = cast iron EN-GJL-200)

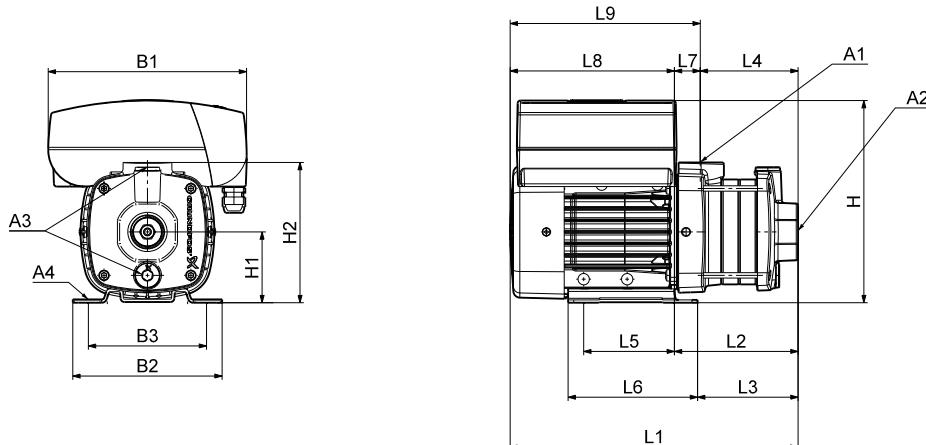

TM04 2249 2208

**Dimensions****3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6			
CME15-1	90	2.20	2"	2"	3/8"	10.2	264	199	160	267	100	245	461	190	175	97	140	170	93	272	364
CME15-2	112	4.0	2"	2"	3/8"	12.0	290	228	190	300	112	257	530	228	212	97	140	172	131	302	433
CME15-3	132	7.5	2"	2"	3/8"	12.0	290	228	190	300	112	257	560	258	242	127	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6			
CME15-1	90	2.20	2"	2"	3/8"	10.2	264	199	160	267	100	245	461	190	175	97	140	170	93	272	364
CME15-2	112	4.0	2"	2"	3/8"	12.0	290	228	190	300	112	257	530	228	212	97	140	172	131	302	433
CME15-3	132	5.5	2"	2"	3/8"	12.0	290	228	190	300	112	257	560	258	242	127	140	172	131	302	433

All dimensions are in mm unless otherwise stated.



**3 x 380-500 V, 50/60 Hz (supply voltage S)****3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6			
CME 15-1	90D	2.20	2"	2"	3/8"	10	268	199	160	258	100	245	398	190	175	97	140	170	93	208	301

All dimensions are in mm unless otherwise stated.

## CME 15-I and CME 15-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

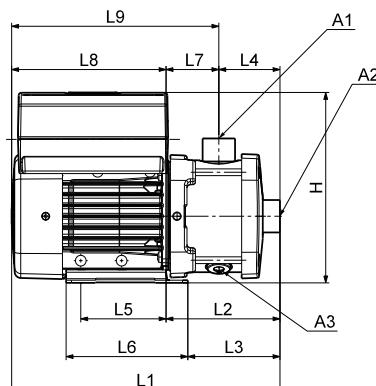

TM04 22472208

### Dimensions

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME15-1	90	2.20	2"	2"	3/8"	10.2	264	199	160	267	100	218	490	219	204	105	140	170	114	272	385
CME15-2	112	4.0	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454
CME15-3	132	7.5	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME15-1	90	2.20	2"	2"	3/8"	10.2	264	199	160	267	100	218	490	219	204	105	140	170	114	272	385
CME15-2	112	4.0	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454
CME15-3	132	5.5	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

**3 x 380-500 V, 50/60 Hz (supply voltage S)**


**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME 15-1	90D	2.20	2"	2"	3/8"	10	268	199	160	258	100	218	424	215	200	105	140	170	110	208	319

All dimensions are in mm unless otherwise stated.

**CME 25-A**

(A = cast iron EN-GJL-200)

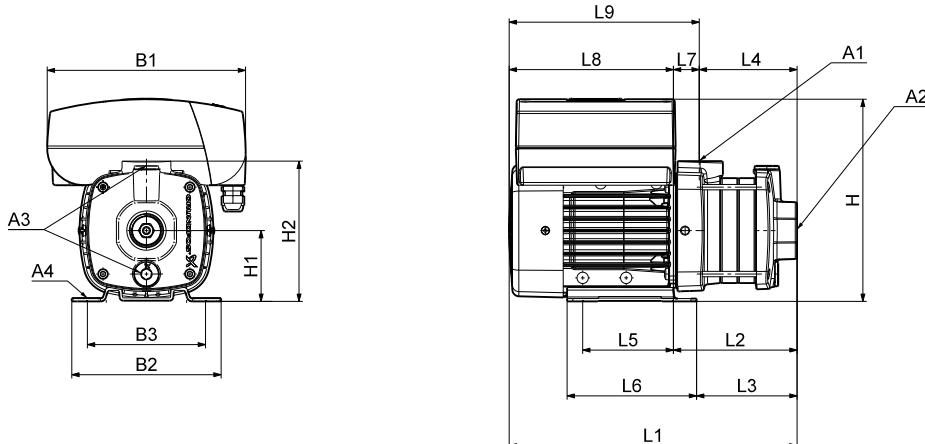

TM04 2249 2208

**Dimensions****3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME25-1	100	3.0	2"	2"	3/8"	12.0	264	199	160	277	100	245	477	205	190	97	140	170	108	272	380
CME25-2	132	7.5	2"	2"	3/8"	12.0	290	228	190	300	112	257	530	228	212	97	140	172	131	302	433

All dimensions are in mm unless otherwise stated.



**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME25-1	112	4.0	2"	2"	3/8"	12.0	290	228	190	300	112	257	530	228	212	97	140	172	131	302	433
CME25-2	132	5.5	2"	2"	3/8"	12.0	290	228	190	300	112	257	530	228	212	97	140	172	131	302	433

All dimensions are in mm unless otherwise stated.

## CME 25-I and CME 25-G

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

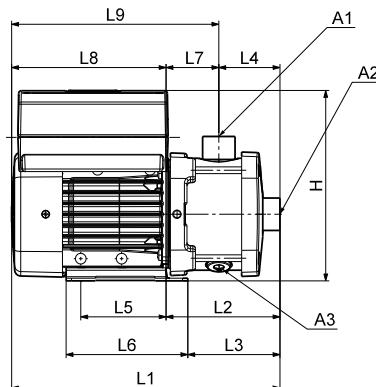

TM04 22472208

### Dimensions

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME25-1	100	3.0	2"	2"	3/8"	12.0	264	199	160	277	100	218	507	235	220	105	140	170	130	272	402
CME25-2	132	7.5	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

**3 x 460-480 V, 60 Hz (supply voltage N)**

Pump type	Frame size	P <sub>2</sub> [kW]	Dimensions [mm]																		
			A1	A2	A3	A4	B1	B2	B3	H	H1	H2	L1	L2	L3	L4	L5	L6	L7	L8	L9
CME25-1	112	4.0	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454
CME25-2	132	5.5	2"	2"	3/8"	12.0	290	228	190	300	112	230	559	257	241	105	140	172	152	302	454

All dimensions are in mm unless otherwise stated.

## 22. Weights and shipping volume

All weights and volumes refer to CM(E) pumps with standard pipe connections.

### CM 1-A

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 1-2	11.0	13.5	0.02
	CM 1-3	11.3	13.8	0.02
	CM 1-4	12.2	14.7	0.02
	CM 1-5	12.5	15.0	0.02
	CM 1-6	12.8	15.3	0.03
	CM 1-7	13.0	15.5	0.03
	CM 1-8	14.7	17.2	0.03
	CM 1-2	11.7	14.2	0.02
1 x 115/230 V, 60 Hz (supply voltage B)	CM 1-3	12.0	14.5	0.02
	CM 1-4	12.2	14.7	0.02
	CM 1-5	12.5	15.0	0.02
	CM 1-2	11.0	13.5	0.02
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 1-3	11.3	13.8	0.02
	CM 1-4	11.5	14.0	0.02
	CM 1-5	11.8	14.3	0.02
	CM 1-6	12.1	14.6	0.03
	CM 1-7	13.0	15.5	0.03
	CM 1-8	13.3	15.8	0.03
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 1-2	11.0	13.5	0.02
	CM 1-3	11.3	13.8	0.02
	CM 1-4	12.2	14.7	0.02
	CM 1-5	12.5	15.0	0.02
3 x 208-230/440-480 V, 60 Hz (supply voltage E) 3 x 575 V, 60 Hz (supply voltage H) 3 x 400 V, 50/60 Hz (supply voltage I) 3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J) 3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)	CM 1-2	11.0	13.5	0.02
	CM 1-3	11.3	13.8	0.02
	CM 1-4	12.2	14.7	0.02
	CM 1-5	12.5	15.0	0.02

### CM 3-A

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 3-2	11.0	13.5	0.02
	CM 3-3	12.0	14.5	0.02
	CM 3-4	12.2	14.7	0.02
	CM 3-5	12.5	15.0	0.02
	CM 3-6	14.2	16.7	0.03
	CM 3-7	15.5	18.0	0.03
	CM 3-8	15.8	18.3	0.03
	CM 3-2	11.7	14.2	0.02
1 x 115/230 V, 60 Hz (supply voltage B) 1 x 220 V, 60 Hz (supply voltage A)	CM 3-3	12.0	14.5	0.02
	CM 3-4	13.6	16.1	0.03
	CM 3-5	15.0	17.5	0.04
	CM 3-2	11.0	13.5	0.02
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 3-3	11.3	13.8	0.02
	CM 3-4	11.5	14.0	0.02
	CM 3-5	12.5	15.0	0.02
	CM 3-6	12.8	15.3	0.03
	CM 3-7	15.8	18.3	0.03
	CM 3-8	16.8	19.3	0.04
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 3-2	11.0	13.5	0.02
	CM 3-3	12.0	14.5	0.02
	CM 3-4	12.2	14.7	0.02
	CM 3-5	15.3	17.8	0.03
	CM 3-2	11.0	13.5	0.02
3 x 208-230/440-480 V, 60 Hz (supply voltage E) 3 x 575 V, 60 Hz (supply voltage H) 3 x 400 V, 50/60 Hz (supply voltage I) 3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J) 3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)	CM 3-3	12.0	14.5	0.02
	CM 3-4	12.2	14.7	0.02
	CM 3-5	13.9	16.4	0.04
	CM 3-2	11.0	13.5	0.02
	CM 3-3	12.0	14.5	0.02

**CM 5-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m³]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 5-2	11.6	14.1	0.02
	CM 5-3	11.9	14.4	0.02
	CM 5-4	13.5	16.0	0.03
	CM 5-5	14.9	17.4	0.03
	CM 5-6	22.7	25.2	0.04
	CM 5-7	23.0	25.5	0.04
	CM 5-8	23.2	25.7	0.04
	CM 5-2	13.0	15.5	0.02
1 x 115/230 V, 60 Hz (supply voltage B) 1 x 220 V, 60 Hz (supply voltage A)	CM 5-3	14.4	16.9	0.04
	CM 5-4	24.3	26.8	0.04
	CM 5-2	10.9	13.4	0.02
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 5-3	11.9	14.4	0.02
	CM 5-4	14.9	17.4	0.03
	CM 5-5	15.9	18.4	0.03
	CM 5-6	16.2	18.7	0.03
	CM 5-7	25.8	28.3	0.04
	CM 5-8	26.0	28.5	0.04
	CM 5-2	11.6	14.1	0.02
	CM 5-3	14.7	17.2	0.03
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 5-4	24.3	26.8	0.03
	CM 5-5	29.7	32.2	0.04
	CM 5-2	11.6	14.1	0.02
	CM 5-3	14.7	17.2	0.03
3 x 208-230/440-480 V, 60 Hz (supply voltage E) 3 x 575 V, 60 Hz (supply voltage H) 3 x 400 V, 50/60 Hz (supply voltage I) 3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)	CM 5-4	24.3	26.8	0.03
	CM 5-5	29.7	32.2	0.04
	CM 5-2	11.6	14.1	0.02
	CM 5-3	14.7	17.2	0.03
3 x 220-240/380-415 V, 50 Hz (supply voltage O)	CM 5-4	24.3	26.8	0.03
	CM 5-5	29.7	32.2	0.04

**CM 10-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m³]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 10-1	22.2	24.7	0.04
	CM 10-2	29.8	32.3	0.04
	CM 10-3	32.6	35.1	0.04
1 x 115/230 V, 60 Hz (supply voltage B) 1 x 220 V, 60 Hz (supply voltage A)	CM 10-1	23.4	25.9	0.04
	CM 10-2	20.9	23.4	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 10-2	25.0	27.5	0.04
	CM 10-3	35.8	38.3	0.04
	CM 10-4	38.6	41.1	0.05
	CM 10-5	39.3	41.8	0.05
	CM 10-11	24.4	26.9	0.04
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 10-12	37.1	39.6	0.04
	CM 10-13	40.8	43.3	0.04
	CM 10-1	24.3	26.8	0.04
3 x 208-230/440-480 V, 60 Hz (supply voltage E) 3 x 575 V, 60 Hz (supply voltage H) 3 x 400 V, 50/60 Hz (supply voltage I)	CM 10-2	37.1	39.6	0.04
	CM 10-3	40.8	43.3	0.04
	CM 10-1	24.3	26.8	0.04

**CM 15-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 15-1	28.5	31.0	0.04
	CM 15-2	31.3	33.8	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 15-1	23.7	26.2	0.04
	CM 15-2	34.5	37.0	0.04
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 15-3	40.2	42.7	0.04
	CM 15-4	56.0	58.5	0.08
3 x 208-230/440-480 V, 60 Hz (supply voltage E)	CM 15-1	35.8	38.3	0.04
	CM 15-2	39.5	42.0	0.04
3 x 575 V, 60 Hz (supply voltage H)	CM 15-3	52.0	54.5	0.08
	CM 15-1	35.8	38.3	0.04
3 x 400 V, 50/60 Hz (supply voltage I)	CM 15-2	39.5	42.0	0.04
	CM 15-3	52.0	54.5	0.08
3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)				

**CM 25-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 25-1	30.6	33.1	0.04
	CM 25-1	33.8	36.3	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 25-2	39.5	42.0	0.04
	CM 25-3	55.3	57.8	0.08
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 25-4	56.4	58.9	0.08
	CM 25-1	38.8	41.3	0.04
3 x 208-230/440-480 V, 60 Hz (supply voltage E)	CM 25-2	51.3	53.8	0.08
	CM 25-1	38.8	41.3	0.04
3 x 575 V, 60 Hz (supply voltage H)	CM 25-2	51.3	53.8	0.08
	CM 25-1	38.8	41.3	0.04
3 x 400 V, 50/60 Hz (supply voltage I)	CM 25-2	51.3	53.8	0.08
	CM 25-1	38.8	41.3	0.04
3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)				

**CM 1-I and CM 1-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 1-2	11.6	14.1	0.02
	CM 1-3	11.7	14.2	0.02
	CM 1-4	12.7	15.2	0.02
	CM 1-5	13.1	15.6	0.02
	CM 1-6	13.7	16.2	0.03
	CM 1-7	13.8	16.3	0.03
	CM 1-8	15.7	18.3	0.04
	CM 1-9	15.8	18.3	0.04
	CM 1-10	16.4	18.9	0.04
	CM 1-11	17.6	20.1	0.04
	CM 1-12	18.5	21.0	0.05
	CM 1-13	18.6	21.1	0.05
	CM 1-14	24.3	26.8	0.08
1 x 115/230 V, 60 Hz (supply voltage B) 1 x 220 V, 60 Hz (supply voltage A)	CM 1-2	11.6	14.1	0.02
	CM 1-3	11.7	14.2	0.02
	CM 1-4	12.0	14.5	0.02
	CM 1-5	12.4	14.9	0.02
	CM 1-6	13.0	15.5	0.03
	CM 1-7	13.8	16.3	0.03
	CM 1-8	14.4	16.8	0.03
	CM 1-9	14.4	16.9	0.03
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 1-2	17.8	20.3	0.04
	CM 1-3	17.9	20.4	0.04
	CM 1-4	18.8	21.3	0.05
	CM 1-5	19.6	22.1	0.05
	CM 1-6	19.6	22.1	0.05
	CM 1-7	12.3	14.8	0.02
	CM 1-8	12.4	14.9	0.02
	CM 1-9	12.7	15.2	0.02
	CM 1-10	13.1	15.6	0.02
	CM 1-11	15.1	17.6	0.03
	CM 1-12	16.3	18.8	0.04
	CM 1-13	16.8	19.3	0.04
	CM 1-14	16.9	19.4	0.04
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 1-2	11.6	14.1	0.02
	CM 1-3	11.7	14.2	0.02
	CM 1-4	12.7	15.2	0.02
	CM 1-5	13.1	15.6	0.02
	CM 1-6	13.7	16.2	0.03
	CM 1-7	13.8	16.3	0.03
	CM 1-8	17.2	19.7	0.04
	CM 1-9	17.9	20.4	0.04
3 x 208-230/440-480 V, 60 Hz (supply voltage E) 3 x 575 V, 60 Hz (supply voltage H) 3 x 400 V, 50/60 Hz (supply voltage I) 3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J) 3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)	CM 1-2	11.6	14.1	0.02
	CM 1-3	11.7	14.2	0.02
	CM 1-4	12.7	15.2	0.02
	CM 1-5	13.1	15.6	0.02
	CM 1-6	13.7	16.2	0.03
	CM 1-7	13.8	16.3	0.03
	CM 1-8	17.2	19.7	0.04
	CM 1-9	17.9	20.4	0.04

**CM 3-I and CM 3-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 3-2	11.6	14.1	0.02
	CM 3-3	12.4	14.9	0.02
	CM 3-4	12.7	15.2	0.02
	CM 3-5	13.1	15.6	0.02
	CM 3-6	15.1	17.6	0.03
	CM 3-7	16.3	18.8	0.03
	CM 3-8	16.8	19.3	0.04
	CM 3-9	22.6	25.1	0.04
	CM 3-10	23.2	25.7	0.05
	CM 3-11	23.3	25.8	0.05
	CM 3-12	24.2	26.7	0.08
	CM 3-13	24.2	26.7	0.08
	CM 3-14	26.4	28.9	0.08
1 x 115/230 V, 60 Hz (supply voltage B)	CM 3-2	11.6	14.1	0.02
1 x 220 V, 60 Hz (supply voltage A)	CM 3-3	11.7	14.2	0.02
	CM 3-4	12.0	14.5	0.02
	CM 3-5	13.1	15.6	0.02
	CM 3-6	13.7	16.2	0.03
	CM 3-7	16.6	19.1	0.03
	CM 3-8	17.8	20.3	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 3-2	17.9	20.4	0.04
	CM 3-3	18.5	21.0	0.04
	CM 3-4	26.1	28.6	0.05
	CM 3-5	27.0	29.5	0.08
	CM 3-6	27.0	29.5	0.08
	CM 3-7	30.0	32.5	0.08
	CM 3-8	12.3	14.8	0.02
	CM 3-9	12.4	14.9	0.02
	CM 3-10	14.1	16.6	0.03
	CM 3-11	15.6	18.1	0.04
	CM 3-12	24.0	26.5	0.04
	CM 3-13	24.0	26.5	0.04
	CM 3-14	24.6	27.1	0.04
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 3-2	11.6	14.1	0.02
	CM 3-3	12.4	14.9	0.02
	CM 3-4	12.7	15.2	0.02
	CM 3-5	15.9	18.4	0.03
	CM 3-6	17.2	19.7	0.03
	CM 3-7	24.0	26.5	0.04
	CM 3-8	29.8	32.3	0.05
	CM 3-9	29.9	32.4	0.05
3 x 208-230/440-480 V, 60 Hz (supply voltage E)	CM 3-2	11.6	14.1	0.02
3 x 575 V, 60 Hz (supply voltage H)	CM 3-3	12.4	14.9	0.02
3 x 400 V, 50/60 Hz (supply voltage I)	CM 3-4	12.7	15.2	0.02
3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)	CM 3-5	15.9	18.4	0.03
3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)	CM 3-6	17.2	19.7	0.03
	CM 3-7	24.0	26.5	0.04
	CM 3-8	29.8	32.3	0.05
	CM 3-9	29.9	32.4	0.05

**CM 5-I and CM 5-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 5-2	12.3	14.8	0.02
	CM 5-3	12.4	14.9	0.02
	CM 5-4	14.1	16.6	0.03
	CM 5-5	15.5	18.0	0.03
	CM 5-6	21.8	24.3	0.04
	CM 5-7	21.9	24.4	0.04
	CM 5-8	22.5	25.0	0.04
	CM 5-9	24.7	27.2	0.04
	CM 5-10	25.3	27.8	0.05
	CM 5-11	25.4	27.9	0.05
1 x 115/230 V, 60 Hz (supply voltage B)	CM 5-2	11.6	14.1	0.02
1 x 220 V, 60 Hz (supply voltage A)	CM 5-3	12.4	14.9	0.02
	CM 5-4	15.5	18.0	0.03
	CM 5-2	16.5	19.0	0.03
	CM 5-3	17.1	19.6	0.03
	CM 5-4	24.7	27.2	0.04
	CM 5-5	25.3	27.8	0.04
	CM 5-6	28.3	30.8	0.05
	CM 5-7	28.9	31.4	0.05
	CM 5-8	29.0	31.5	0.05
	CM 5-9	31.5	34.0	0.08
	CM 5-10	31.6	34.1	0.08
	CM 5-11	13.7	16.2	0.02
	CM 5-12	14.9	17.4	0.04
	CM 5-13	23.0	25.5	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 5-2	12.3	14.8	0.02
	CM 5-3	15.2	17.7	0.02
	CM 5-4	23.0	25.5	0.03
	CM 5-5	28.5	31.0	0.04
	CM 5-6	29.1	31.6	0.04
	CM 5-7	29.2	31.7	0.04
	CM 5-8	32.8	35.3	0.05
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 5-2	12.3	14.8	0.02
	CM 5-3	15.2	17.7	0.02
	CM 5-4	23.0	25.5	0.03
	CM 5-5	28.5	31.0	0.04
	CM 5-6	29.1	31.6	0.04
	CM 5-7	29.2	31.7	0.04
	CM 5-8	32.8	35.3	0.05
3 x 208-230/440-480 V, 60 Hz (supply voltage E)	CM 5-2	12.3	14.8	0.02
3 x 575 V, 60 Hz (supply voltage H)	CM 5-3	15.2	17.7	0.02
3 x 400 V, 50/60 Hz (supply voltage I)	CM 5-4	23.0	25.5	0.03
3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)	CM 5-5	28.5	31.0	0.04
3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)	CM 5-6	29.1	31.6	0.04
	CM 5-7	29.2	31.7	0.04
	CM 5-8	32.8	35.3	0.05

**CM 10-I and CM 10-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m³]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 10-1	17.6	20.1	0.04
	CM 10-2	24.8	27.3	0.04
	CM 10-3	27.1	29.6	0.04
1 x 115/230 V, 60 Hz (supply voltage B)	CM 10-1	16.3	18.8	0.04
1 x 220 V, 60 Hz (supply voltage A)	CM 10-2	19.0	21.5	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 10-3	30.3	32.8	0.04
	CM 10-4	33.2	35.7	0.05
	CM 10-5	34.6	37.1	0.08
	CM 10-6	37.7	40.2	0.08
	CM 10-7	54.3	56.8	0.08
	CM 10-8	54.5	57.0	0.08
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 10-1	18.8	21.3	0.04
	CM 10-2	32.1	34.6	0.04
	CM 10-3	35.3	37.8	0.04
	CM 10-4	48.0	50.5	0.05
	CM 10-5	49.4	51.9	0.08
3 x 208-230/440-480 V, 60 Hz (supply voltage E)	CM 10-1	18.8	21.3	0.04
3 x 575 V, 60 Hz (supply voltage H)	CM 10-2	32.1	34.6	0.04
3 x 400 V, 50/60 Hz (supply voltage I)	CM 10-3	35.3	37.8	0.04
3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)	CM 10-4	48.0	50.5	0.05
3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)	CM 10-5	49.4	51.9	0.08

**CM 15-I and CM 15-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m³]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 15-1	24.5	27.0	0.04
	CM 15-2	26.8	29.3	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 15-1	18.7	21.2	0.04
	CM 15-2	30.0	32.5	0.04
	CM 15-3	35.2	37.7	0.04
	CM 15-4	51.2	53.7	0.05
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 15-1	31.8	34.3	0.04
	CM 15-2	35.0	37.5	0.04
	CM 15-3	47.0	49.5	0.05
3 x 208-230/440-480 V, 60 Hz (supply voltage E)	CM 15-1	31.8	34.3	0.04
3 x 575 V, 60 Hz (supply voltage H)	CM 15-2	35.0	37.5	0.04
3 x 400 V, 50/60 Hz (supply voltage I)	CM 15-3	47.0	49.5	0.05
3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)	CM 15-1	31.8	34.3	0.04

**CM 25-I and CM 25-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 220-240 V, 50 Hz (supply voltage C)	CM 25-1	26.6	29.1	0.04
	CM 25-1	29.8	32.3	0.04
3 x 220-240/380-415 V, 50 Hz (supply voltage F)	CM 25-2	35.0	37.5	0.04
	CM 25-3	50.3	52.8	0.05
	CM 25-4	51.6	54.1	0.05
3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)	CM 25-1	34.8	37.3	0.04
	CM 25-2	46.8	49.3	0.05
3 x 208-230/440-480 V, 60 Hz (supply voltage E) 3 x 575 V, 60 Hz (supply voltage H) 3 x 400 V, 50/60 Hz (supply voltage I)	CM 25-1	34.8	37.3	0.04
	CM 25-3	46.8	49.3	0.05
	3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)			

**CME 1-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K) 1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 1-2	14.4	17.9	0.03
	CME 1-3	14.7	18.2	0.03
	CME 1-4	14.9	18.4	0.04
	CME 1-5	17.6	21.1	0.04
	CME 1-2	12.8	16.3	0.02
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 1-3	13.1	16.6	0.02
	CME 1-4	13.3	16.8	0.02
	CME 1-5	14.4	17.9	0.03
3 x 380-500 V, 50/60 Hz (supply voltage S) 3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 1-2	13.7	17.2	0.03
	CME 1-3	14.0	17.5	0.03
	CME 1-4	14.2	17.7	0.03
	CME 1-5	15.3	18.8	0.03

**CME 3-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K) 1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 3-2	14.4	17.9	0.03
	CME 3-3	17.1	20.6	0.04
	CME 3-4	17.3	20.8	0.04
	CME 3-5	17.6	21.1	0.04
	CME 3-2	12.8	16.3	0.02
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 3-3	13.9	17.4	0.02
	CME 3-4	14.1	17.6	0.02
	CME 3-5	14.4	17.9	0.03
3 x 380-500 V, 50/60 Hz (supply voltage S) 3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 3-2	13.7	17.2	0.03
	CME 3-3	15.1	18.6	0.02
	CME 3-4	15.0	18.5	0.03
	CME 3-5	15.3	18.8	0.03

**CM, CME****CME 5-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K)	CME 5-2	16.7	20.2	0.04
1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 5-3	17.0	20.5	0.04
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 5-4	30.0	33.5	0.08
	CME 5-5	34.2	37.7	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 5-4	31.3	34.8	0.08
	CME 5-5	31.5	35.0	0.08
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 5-2	13.5	17.0	0.02
	CME 5-3	13.8	17.3	0.02
	CME 5-4	17.4	20.9	0.03
	CME 5-2	14.4	17.9	0.03
3 x 380-500 V, 50/60 Hz (supply voltage S)	CME 5-3	14.7	18.2	0.03
3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 5-4	18.2	21.7	0.03
	CME 5-5	17.6	21.1	0.03

**CME 10-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K)	CME 10-1	25.9	29.4	0.04
1 x 208-230 V, 50/60 Hz (supply voltage M)				
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 10-2	41.6	45.1	0.08
	CME 10-3	63.5	67.0	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 10-2	41.7	45.2	0.08
	CME 10-3	60.2	63.7	0.08
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 10-1	22.7	26.2	0.02
3 x 380-500 V, 50/60 Hz (supply voltage S)	CME 10-1	23.6	27.1	0.03
3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 10-2	27.1	30.6	0.03

**CME 15-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 15-1	40.3	43.8	0.08
	CME 15-2	62.1	65.6	0.08
	CME 15-3	67.0	70.5	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 15-1	40.4	43.9	0.08
	CME 15-2	58.8	62.3	0.08
	CME 15-3	63.2	66.7	0.08
3 x 380-500 V, 50/60 Hz (supply voltage S)	CME 15-1	25.8	29.3	0.03
3 x 440-480 V, 50/60 Hz (supply voltage T)				

**CME 25-A**

(A = cast iron EN-GJL-200)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 25-1	43.5	47.0	0.08
	CME 25-2	66.3	69.8	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 25-1	58.2	61.7	0.08
	CME 25-2	62.5	66.0	0.08

**CME 1-I and CME 1-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K) 1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 1-2 CME 1-3 CME 1-4 CME 1-5 CME 1-6 CME 1-7 CME 1-8	15.0 15.1 15.4 18.2 18.8 18.9 19.5	18.5 18.6 18.9 21.7 22.3 22.4 23.0	0.03 0.03 0.04 0.04 0.04 0.04 0.04
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 1-9	30.4	33.9	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 1-9	31.7	35.2	0.08
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 1-2 CME 1-3 CME 1-4 CME 1-5 CME 1-6 CME 1-7 CME 1-8 CME 1-9	13.5 13.6 13.9 15.0 15.6 15.7 16.3 17.8	17.0 17.1 17.4 18.5 19.1 19.2 19.8 21.3	0.02 0.02 0.02 0.02 0.03 0.03 0.03 0.03
3 x 380-500 V, 50/60 Hz (supply voltage S) 3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 1-2 CME 1-3 CME 1-4 CME 1-5 CME 1-6 CME 1-7 CME 1-8 CME 1-9	14.3 14.4 14.7 15.8 16.4 16.5 17.1 18.6	17.8 17.9 18.2 19.3 19.9 20.0 20.6 22.1	0.02 0.02 0.03 0.03 0.03 0.03 0.03 0.03

**CME 3-I and CME 3-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K) 1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 3-2 CME 3-3 CME 3-4 CME 3-5 CME 3-6 CME 3-7 CME 3-8 CME 3-9	15.0 17.5 17.8 18.2 29.7 29.7 34.3 34.4	18.5 21.0 21.3 21.7 33.2 33.2 37.8 37.9	0.03 0.04 0.04 0.04 0.08 0.08 0.08 0.08
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 3-6 CME 3-7 CME 3-8 CME 3-9	31.0 31.0 31.6 34.6	34.5 34.5 35.1 38.1	0.08 0.08 0.08 0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 3-2 CME 3-3 CME 3-4 CME 3-5 CME 3-6 CME 3-7	13.5 14.3 14.6 15.0 17.1 17.1	17.0 17.8 18.1 18.5 20.6 20.6	0.02 0.02 0.02 0.02 0.03 0.03
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 3-2 CME 3-3 CME 3-4 CME 3-5 CME 3-6 CME 3-7	14.3 15.1 15.4 15.8 17.9 17.9	17.8 18.6 18.9 19.3 21.4 21.4	0.02 0.02 0.03 0.03 0.03 0.03
3 x 380-500 V, 50/60 Hz (supply voltage S) 3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 3-8 CME 3-9	19.9 20.0	23.4 23.5	0.03 0.03

**CME 5-I and CME 5-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K)	CME 5-2	17.4	20.9	0.04
1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 5-3	17.5	21.0	0.04
	CME 5-4	28.7	32.2	0.08
	CME 5-5	33.0	36.5	0.08
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 5-6	33.6	37.1	0.08
	CME 5-7	36.9	40.4	0.08
	CME 5-8	37.5	41.0	0.08
	CME 5-4	30.0	33.5	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 5-5	30.3	33.8	0.08
	CME 5-6	33.8	37.3	0.08
	CME 5-7	33.9	37.4	0.08
	CME 5-2	14.2	17.7	0.02
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 5-3	14.3	17.8	0.02
	CME 5-4	16.1	19.6	0.03
	CME 5-2	15.0	18.5	0.02
3 x 380-500 V, 50/60 Hz (supply voltage S)	CME 5-3	15.1	18.6	0.02
3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 5-4	16.9	20.4	0.03
	CME 5-5	18.6	22.1	0.03
	CME 5-6	19.2	22.7	0.03

**CME 10-I and CME 10-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
1 x 200-240 V, 50/60 Hz (supply voltage K)	CME 10-1	21.3	24.8	0.04
1 x 208-230 V, 50/60 Hz (supply voltage M)	CME 10-2	36.6	40.1	0.08
	CME 10-3	57.9	61.4	0.08
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 10-4	58.8	62.3	0.08
	CME 10-5	60.2	63.7	0.08
	CME 10-2	36.7	40.2	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 10-3	54.6	58.1	0.08
	CME 10-4	55.5	59.0	0.08
	CME 10-5	60.6	64.1	0.08
1 x 200-240 V, 50/60 Hz (supply voltage U)	CME 10-1	18.1	21.6	0.03
3 x 380-500 V, 50/60 Hz (supply voltage S)	CME 10-1	19.0	22.5	0.03
3 x 440-480 V, 50/60 Hz (supply voltage T)	CME 10-2	22.1	0.0	0.03

**CME 15-I and CME 15-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
	CME 15-1	36.3	39.8	0.08
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 15-2	57.6	61.1	0.08
	CME 15-3	62.0	65.5	0.08
	CME 15-1	36.4	39.9	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 15-2	54.3	57.8	0.08
	CME 15-3	58.2	61.7	0.08
3 x 380-500 V, 50/60 Hz (supply voltage S)	CME 15-1	21.8	25.3	0.03
3 x 440-480 V, 50/60 Hz (supply voltage T)				

**CME 25-I and CME 25-G**

(I = EN 1.4301/AISI 304 and G = EN 1.4401/AISI 316)

Supply voltage	Pump type	Net weight [kg]	Gross weight [kg]	Shipping volume [m <sup>3</sup> ]
3 x 380-480 V, 50/60 Hz (supply voltage L)	CME 25-1	39.5	43.0	0.08
	CME 25-2	61.8	65.3	0.08
3 x 460-480 V, 60 Hz (supply voltage N)	CME 25-1	54.1	57.6	0.08
	CME 25-2	58.0	61.5	0.08

## 23. Motor data

### Mains-operated motors, 50 Hz

1 x 220-240 V, 50 Hz (supply voltage C)

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos Φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71A	0.3	1.8 - 2.4	0.95 - 0.86	67.4 - 61.4	6.1 - 8.2	2.800 - 2.830
71B	0.5	3.1 - 2.8	0.97 - 0.99	74 - 70	16.4 - 14.8	2.730 - 2.740
80A	0.67	4.4 - 4.0	0.99 - 0.99	71.8 - 73	17.2 - 15.6	2.720 - 2.800
80B	0.9	5.4 - 5.0	0.98 - 0.98	76 - 74	23.2 - 21.5	2.750 - 2.790
90SA	1.3	8.4 - 8.0	0.98 - 0.98	71 - 71	28.6 - 27.2	2.710 - 2.710
90SB	1.9	11.0 - 10.0	0.99 - 0.98	75 - 76	40.7 - 37.0	2.755 - 2.770

3 x 220-240/380-415 V, 50 Hz (supply voltage F)

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos Φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71A	0.46	2.0 - 2.2 / 1.0 - 1.2	0.83 - 0.75	73.4 - 73.6	9.8 - 11.7 / 4.9 - 6.4	2.770 - 2.820
71B	0.65	2.8 - 3.1 / 1.6 - 1.8	0.82 - 0.72	73.9 - 72.9	16.2 - 19.2 / 9.3 - 11.2	2.770 - 2.820
80BA	0.85	3.5 - 3.8 / 2 - 2.22	0.77 - 0.68	79.7 - 79.3	21.0 - 24.3 / 12.0 - 14.2	2.840 - 2.870
80C	1.2	4.8 - 5.2 / 2.8 - 3	0.79 - 0.7	83 - 80.9	37.0 - 41.6 / 21.6 - 24.0	2.820 - 2.860
90SB	1.58	5.55 - 5.38 / 3.25 - 3	0.88 - 0.84	83.4 - 84.3	38.9 - 44.1 / 22.8 - 24.6	2.880 - 2.910
90SC	2.2	8.15 - 7.85 / 4.7 - 4.5	0.89 - 0.84	83.7 - 84.3	72.5 - 80.1 / 41.8 - 45.9	2.880 - 2.910
100LA	3.2	11.8 - 11.0 / 6.75 - 6.40	0.87 - 0.79	85.2 - 85.5	94.4 - 96.8 / 54.0 - 56.3	2.900 - 2.920
100LB	4.0	14.0 - 13.2 / 8.20 - 7.80	0.87 - 0.84	87.1 - 87.9	119.0 - 125.4 / 69.7 - 74.1	2.900 - 2.920
132SB	5.8	20.4 - 19.0 / 11.8 - 11.0	0.89 - 0.84	87.5 - 88.0	181.6 - 184.3 / 105.0 - 106.7	2.900 - 2.980
132SC	7.4	25.5 - 26.5 / 14.8 - 15.4	0.86 - 0.77	88.4 - 88.7	232.1 - 254.4 / 134.7 - 147.8	2.910 - 2.930

## Mains-operated motors, 60 Hz

### 1 x 220 V, 60 Hz (supply voltage A)

Frame size	P <sub>2</sub> [kW]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71B	0.60	0.80	1	4.1	4.1	0.98	71	16.8 3.300
80A	0.84	1.1	1	5.8	5.8	0.98	69.8	18.6 3.150
80B	1.14	1.5	1	7.35	7.35	0.99	73.5	19.8 3.270
90SB	1.54	2.0	1	9.8	9.8	0.98	74.8	37.2 3.330

### 1 x 115/230 V, 60 Hz (supply voltage B)

Frame size	P <sub>2</sub> [kW]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71BA	0.60	0.8	1	7.6 / 3.9	7.6 / 3.9	0.76	69 - 66	19.8 / 10.1 3.240
80AA	0.78	1.06	1	10.6 / 5.4	10.6 / 5.4	0.65	69 - 68	31.8 / 16.2 3.240
80BA	1.10	1.50	1	14.0 / 7.0	14.0 / 7.0	0.94	71 - 69	44.8 / 22.4 3.320
90CC	1.50	2.03	1	19.5 / 9.8	19.5 / 9.8	0.97	72.9 - 69	78.0 / 39.2 3.360

### 3 x 208-230/440-480 V, 60 Hz (supply voltage E)

Frame size	P <sub>2</sub> [kW]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71AA	0.43	0.58	1	1.9 - 1.7 / 1.0 - 0.8	1.9 - 1.7 / 1.0 - 0.8	0.85 - 0.81/ 0.85 - 0.81	76.0 - 78.6	11.2 - 11.1 / 5.9 - 5.2
71BA	0.74	1.0	1	3.4 - 3.6 / 1.7 - 1.8	3.4 - 3.6 / 1.7 - 1.8	0.89 - 0.83/ 0.89 - 0.83	76.0 - 78.4	20.1 - 23.4 / 10.0 - 11.7
80BA	1.04	1.4	1	4.1 - 3.95 / 2 - 2	4.1 - 3.95 / 2 - 2	0.8 - 0.71/ 0.8 - 0.71	83.6 - 83	26.7 - 31.6 / 13.0 - 16.0
80CB	1.28	1.7	1	5.1 - 4.9 / 2.48 - 2.46	5.1 - 4.9 / 2.48 - 2.46	0.82 - 0.75/ 0.82 - 0.79	83.5 - 83.8	34.7 - 37.7 / 16.9 - 18.9
90CC	1.7	2.3	1	6.25 - 5.85 / 2.98 - 2.85	6.25 - 5.85 / 2.98 - 2.85	0.83 - 0.84/ 0.83 - 0.84	85.9 - 85.8	53.1 - 55.0 / 25.3 - 26.8
90FA	2.5	3.4	1	8.95 - 8.5 / 4.3 - 4	8.95 - 8.5 / 4.3 - 4	0.9 - 0.81/ 0.9 - 0.81	86.1 - 86.9	81.4 - 89.3 / 39.1 - 42.0
100BB	4.0	5.4	1	14.8 - 14.2 / 7.2 - 7.0	14.8 - 14.2 / 7.2 - 7.0	0.86 - 0.80/ 0.86 - 0.80	88.5 - 89.2	177.6 - 123.5 / 86.4 - 60.9
132CA	6	8	1	21 - 20.4 / 10.5 - 10.2	21 - 20.4 / 10.5 - 10.2	0.88 - 0.82/ 0.88 - 0.82	89.4 - 89	189.0 - 234.6 / 94.5 - 117.3

### 3 x 575 V, 60 Hz (supply voltage H)

Frame size	P <sub>2</sub> [kW]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71AA	0.43	0.58	1	0.7	0.7	0.84	76.0	4.6 3.340
71BA	0.74	1.0	1	1.3	1.3	0.84	76	8.5 3.340
80BA	1.04	1.4	1	1.55	1.55	0.8	85.2	11.8 3.450
80CB	1.28	1.7	1	1.84	1.84	0.82	85.7	15.3 3.440
90CC	1.7	2.3	1	2.89	2.89	0.83	85.9	27.7 3.440
90FA	2.5	3.4	1	3.5	3.5	0.9	85.9	20.7 3.490
100BB	4.0	5.4	1	5.7	5.7	0.88	88.5	49.6 3.500
132CA	6	8	1	8.2	8.2	0.86	89.2	106.6 3.520

## Mains-operated motors, 50/60 Hz

3 x 220-240/380-415 V, 50 Hz; 3 x 220-255/380-440 V, 60 Hz (supply voltage O)

Frame size	P <sub>2</sub> [kW]	Frequency [Hz]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71B	0.43	50	3.4 - 2.5 / 1.3 - 1.5	0.72 - 0.60	78 - 76	17.0 - 15.0 / 6.5 - 9.0	2.870 - 2.890
	0.74	60	3.4 - 2.9 / 1.6 - 1.7	0.87 - 0.84	75 - 77	17.0 - 17.4 / 8.0 - 10.2	3.280 - 3.350
80BA	0.6	50	3.46 - 4.24 / 2 - 2.45	0.55 - 0.43	84 - 80.1	33.2 - 36.5 / 19.2 - 21.1	2.920 - 2.930
	1.04	60	4.3 - 4.1 / 2.48 - 2.37	0.76 - 0.68	84.1 - 85.5	28.0 - 31.6 / 16.1 - 18.2	3.410 - 3.450
80C	0.74	50	4.24 - 5.2 / 2.45 - 3	0.55 - 0.43	84.6 - 81.3	40.7 - 46.8 / 23.5 - 27.0	2.920 - 2.930
	1.28	60	5.2 - 4.9 / 3 - 2.83	0.77 - 0.7	84.3 - 85.7	34.3 - 38.2 / 19.8 - 22.1	3.400 - 3.440

3 x 380-415 V, 50 Hz; 3 x 440-480 V, 60 Hz (supply voltage J)

Frame size	P <sub>2</sub> [kW]	Frequency [Hz]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71AA	0.25	50	0.55 - 0.65	0.77 - 0.71	77 - 76	4.0 - 5.1	2.870 - 2.890
	0.43	60	0.95 - 0.80	0.85 - 0.82	76.0 - 78.6	5.6 - 5.2	3.360 - 3.420
71BA	0.43	50	1.4 - 1.5	0.76 - 0.66	77 - 76	7.7 - 9.0	2.860 - 2.890
	0.74	60	1.7 - 1.8	0.89 - 0.83	76.0 - 78.4	10.0 - 11.7	3.220 - 3.380
80BA	0.6	50	1.55 - 1.75	0.68 - 0.62	83.5 - 82	13.8 - 14.7	2.900 - 2.910
	1.04	60	2 - 2.1	0.85 - 0.75	82.5 - 82.9	14.6 - 16.8	3.420 - 3.460
80CB	0.74	50	1.95 - 2.1	0.72 - 0.62	85.2 - 84.1	18.1 - 20.4	2.900 - 2.920
	1.28	60	2.55 - 2.45	0.82 - 0.76	85.3 - 85.8	19.1 - 21.3	3.440 - 3.470
90CC	1	50	2.25 - 2.3	0.8 - 0.74	83.9 - 82.9	25.2 - 27.8	2.930 - 2.950
	1.7	60	2.98 - 2.85	0.88 - 0.84	86.1 - 86.9	25.3 - 26.8	3.490 - 3.510
90FA	1.45	50	3 - 3.2	0.83 - 0.81	86.8 - 87	36.0 - 41.6	2.920 - 2.950
	2.5	60	4.3 - 4	0.9 - 0.87	86.1 - 86.9	38.7 - 44.0	3.490 - 3.520
100BB	2.36	50	6.0 - 6.5	0.76 - 0.65	88 - 87	72.0 - 87.8	2.950 - 2.960
	4.0	60	7.3 - 7.5	0.86 - 0.80	88.5 - 89.2	87.6 - 65.3	3.520 - 3.530
132CA	3.5	50	7.9 - 8.7	0.76 - 0.64	88.5 - 87	122.5 - 133.5	2.950 - 2.960
	6	60	10.2 - 10.2	0.86 - 0.79	89.3 - 89.1	123.4 - 136.7	3.520 - 3.530

3 x 200/346 V, 50 Hz; 3 x 200-220/346-380 V, 60 Hz (supply voltage G)

Frame size	P <sub>2</sub> [kW]	Frequency [Hz]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71AA	0.25	50	1.6 / 1.0	0.65	77 - 76	11.7 / 7.3	2.900
	0.43	60	2.0 - 1.8 / 1.15 - 1.05	0.85 - 0.8	76.0 - 78.6	11.8 - 11.7 / 6.8 - 6.8	3.370 - 3.424
71B	0.43	50	3.6 / 2.0	0.53	77 - 76	19.8 / 11.0	2.904
	0.74	60	3.3 - 3.5 / 2.0 - 2.2	0.83 - 0.76	76 - 78.4	19.5 - 22.8 / 11.8 - 14.3	3.380 - 3.429
80BA	0.6	50	4.6 / 2.66	0.56	82.4 - 82.4	42.8 / 24.7	2.930
	1.04	60	4.3 - 4.2 / 2.5 - 2.4	0.8 - 0.72	85 - 85	31.0 - 35.3 / 18.0 - 20.2	3.440 - 3.470
80C	0.74	50	6.1 / 3.53	0.61	84 - 84	51.9 / 30.0	2.910
	1.28	60	5.7 - 5.2 / 3.3 - 3	0.77 - 0.77	83.8 - 84.1	37.1 - 31.7 / 21.5 - 18.3	3.450 - 3.450
90SB	1	50	5.2 / 3	0.65	83 - 83	65.0 / 37.5	2.950
	1.7	60	6.6 - 6.3 / 3.8 - 3.6	0.83 - 0.84	85.9 - 85.8	56.1 - 63.0 / 32.3 - 36.0	3.440 - 3.520
90LC	1.45	50	6.5 / 3.8	0.75	86.6 - 86.6	88.4 / 51.7	2.950
	2.5	60	9.6 - 8.8 / 5.5 - 5.1	0.9 - 0.88	83.1 - 86.9	74.9 - 84.5 / 42.9 - 49.0	3.480 - 3.500
100LB	2.3	50	11.6 / 6.65	0.66	86.9 - 83.5	139.2 / 79.8	2.960
	4.0	60	14.8 - 13.8 / 8.55 - 8	0.89 - 0.85	87.5 - 89.4	177.6 - 165.6 / 102.6 - 96.0	3.510 - 3.530
112MC	3.5	50	19 / 11	0.62	88.2 - 88.2	285.0 / 165.0	2.960
	6.00	60	22.2 - 21.2 / 12.8 - 12.2	0.86 - 0.79	89.3 - 89	244.2 - 260.8 / 140.8 - 150.1	3.520 - 3.540

**3 x 400 V, 50/60 Hz (supply voltage I)**

Frame size	P <sub>2</sub> [kW]	Frequency [Hz]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>	η [%]	I <sub>start</sub> [A]	Speed [min <sup>-1</sup> ]
71AA	0.25	50	0.73	0.68	72.6	4.7	2.890
	0.43	60	1.0	0.86	73.5	6.5	3.320
71BA	0.43	50	1.68	0.53	71.1	10.9	2.890
	0.74	60	1.70	0.84	76.0	11.1	3.320
80BA	0.6	50	1.9	0.59	81.6	13.5	2.910
	1.04	60	2.18	0.83	83	13.5	3.400
80CB	0.74	50	2.28	0.57	82.4	13.9	2.920
	1.28	60	2.65	0.84	83.9	13.8	3.400
90CC	1	50	3	0.59	81.3	26.7	2.960
	1.7	60	3.2	0.87	81.3	23.7	3.510
90FA	1.45	50	3.0	0.83	86.8	36.0	2.920
	2.5	60	4.65	0.91	85.4	41.9	3.500
100BB	2.32	50	5.5	0.7	87	63.3	2.960
	4	60	7.35	0.89	87.6	63.2	3.500
132CA	3.5	50	8.8	0.65	88.2	145.2	2.960
	6	60	11.2	0.87	90	172.9	3.520

**Speed-controlled motors****1 x 208-230 V, 50/60 Hz (supply voltage M)**

Frame size	P <sub>2</sub> [kW]	P <sub>2</sub> [hp]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>
71BA	0.55	0.75	1	3.9 - 3.5	3.9 - 3.5	0.97
80BA	1.10	1.50	1	7.5 - 6.8	7.5 - 6.8	0.97

**1 x 200-240 V, 50/60 Hz (supply voltage K)**

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>
71B	0.55	4.30 - 3.6	0.97
80B	1.10	8.20 - 6.80	0.97

**3 x 460-480 V, 60 Hz (supply voltage N)**

Frame size	P <sub>2</sub> [kW]	P <sub>2</sub> [hp]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>
90CC	1.50	2.00	1.15	3.1 - 3.1	3.6 - 3.6	0.87
90FA	2.20	3.00	1.15	3.7 - 3.7	4.3 - 4.3	0.91
112CA	4.0	5.5	1.15	6.1 - 6.1	7.0 - 7.0	0.92
132DA	5.5	7.5	1.15	8.9 - 8.9	10.2 - 10.2	0.94

**3 x 380-480 V, 50/60 Hz (supply voltage L)**

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>
90SB	1.50	3.3 - 2.7	0.91 - 0.87
90LC	2.20	4.6 - 3.8	0.92 - 0.90
100LC	3.0	6.2 - 5	0.94 - 0.92
112MC	4.0	8.1 - 6.6	0.94 - 0.92
132SC	5.5	11 - 8.8	0.94 - 0.93
132SD	7.5	15 - 12	0.94 - 0.93

**3 x 208-230 V, 50/60 Hz (supply voltage Q)**

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>
90CC	1.50	5.60 - 5.10	0.95 - 0.95
90SB	1.50	5.60 - 5.10	0.95 - 0.95
90LC	2.20	8.3 - 7.6	0.95 - 0.90
90FA	2.20	8.3 - 7.6	0.95 - 0.90
112MC	4.0	13.4 - 12.8	0.94 - 0.9
132SC	5.5	19.7 - 18.1	0.94 - 0.92

**3 x 200-230 V, 50/60 Hz (supply voltage R)**

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>
90SB	1.50	5.60 - 5.10	0.95 - 0.95
90LC	2.20	8.3 - 7.6	0.95 - 0.90
112MC	4.0	13.4 - 12.8	0.94 - 0.9
132SC	5.5	19.7 - 18.1	0.94 - 0.92

**3 x 380-500 V, 50/60 Hz (supply voltage S)**

Frame size	P <sub>2</sub> [kW]	I <sub>1/1</sub> [A]	Cos φ <sub>1/1</sub>
71A	0.55	1.3 - 1.1	0.83 - 0.72
80B	1.1	2.15 - 1.8	0.91 - 0.82
90C	1.5	2.9 - 2.4	0.92 - 0.84
90D	2.2	4.15 - 3.4	0.93 - 0.87

**3 x 440-480 V, 50/60 Hz (supply voltage T)**

Frame size	P <sub>2</sub> [kW]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>
71A	0.55	0.75	1.25	1.2	0.76
80B	1.1	1.5	1.15	1.9	0.85
90C	1.5	2	1.15	2.6	0.87
90D	2.2	3	1.15	3.7	0.89

**1 x 200-240 V, 50/60 Hz (supply voltage U)**

Frame size	P <sub>2</sub> [kW]	Service factor	I <sub>1/1</sub> [A]	Service factor current	Cos φ <sub>1/1</sub>
71A	0.55	0.75	1	3.4 - 2.9	0.98
80B	1.1	1.5	1	6.55 - 5.45	0.99
90C	1.5	2	1	8.9 - 7.45	0.99

## Additional data for speed-controlled motors

### New-generation CME (supply voltages S, T, U)

	Single-phase 0.37 to 1.5 kW (supply voltage U)	Three-phase 0.37 to 2.2 kW (supply voltage S, T)
<b>Power supply to pump</b>	1 x 200-240 V - 10 %/+ 10 %, 50/60 Hz, PE.	3 x 380-480 V - 10 %/+ 10 %, 50/60 Hz, PE. 3 x 380-500 V - 10 %/+ 10 %, 50/60 Hz, PE.
<b>Backup fuse</b>	Motor sizes of 0.37 to 0.75 kW: Max. 10 A. Motor sizes of 1.1 to 1.5 kW: Max. 16 A. Standard as well as quick-blow or slow-blow fuses may be used.	Motor sizes of 0.37 to 1.1 kW: Max. 6 A. Motor sizes of 1.5 to 2.2 kW: Max. 10 A. Standard as well as quick-blow or slow-blow fuses may be used.
<b>External start/stop input</b>	External potential-free contact. Maximum contact load: Voltage 5 VDC, current < 10 mA. Screened cable.* Maximum cable length: 500 m.	
<b>Digital input</b>	External potential-free contact. Maximum contact load: Voltage 5 VDC, current < 10 mA. Screened cable.*	
<b>Setpoint signals</b>	<ul style="list-style-type: none"> <li>Potentiometer 0-5 VDC, 10 kΩ (via internal voltage supply). Screened cable.* Maximum cable length: 100 m.</li> <li>Voltage signal 0.5 - 3.5 VDC / 0-5 VDC / 0-10 VDC, <math>R_i &gt; 100 \text{ k}\Omega</math>. Tolerance: + 0 %/- 3 % at maximum voltage signal. Screened cable.* Maximum cable length: 500 m.</li> <li>Current signal 0-20 mA / 4-20 mAADC, <math>R_i = 292 \Omega</math>. Tolerance: + 0 %/- 3 % at maximum current signal. Screened cable.* Maximum cable length: 500 m.</li> </ul>	
<b>Power supply to sensors</b>	The sensors are supplied with electricity via the motor terminal box. <ul style="list-style-type: none"> <li>5 VDC - 5 %/+ 5 %.</li> <li>Maximum load: 50 mAADC.</li> <li>24 VDC - 5 %/+ 5 %.</li> <li>Maximum load: 60 mAADC.</li> </ul>	
<b>Sensor signals</b>	<ul style="list-style-type: none"> <li>Voltage signal 0.5 - 3.5 VDC / 0-5 VDC / 0-10 VDC, <math>R_i &gt; 100 \text{ k}\Omega</math>. Tolerance: + 0 %/- 3 % at maximum voltage signal. Screened cable.* Maximum cable length: 500 m.</li> <li>Current signal 0-20 mA / 4-20 mAADC, <math>R_i = 292 \Omega</math>. Tolerance: + 0 %/- 3 % at maximum current signal. Screened cable.* Maximum cable length: 500 m.</li> </ul>	
<b>Signal output</b>	Potential-free changeover contact. Minimum contact load when in use: 5 VDC, 10 mA. Screened cable: 0.5 - 2.5 mm² / 28-12 AWG. Maximum cable length: 500 m.	
<b>Bus input</b>	Grundfos GENibus protocol, RS-485. Screened 3-core cable: 0.5 - 1.5 mm² / 28-16 AWG. Maximum cable length: 500 m.	
<b>EMC</b>	<b>EN 61800-3:</b> <ul style="list-style-type: none"> <li>Residential areas, unlimited distribution, corresponding to CISPR 11, class B, group 1.</li> <li>Industrial areas, unlimited distribution, corresponding to CISPR 11, class A, group 1.</li> </ul>	
<b>Enclosure class</b>	IP55 (IEC 34-5).	
<b>Insulation class</b>	F (IEC 85).	
<b>Ambient temperature</b>	During operation: -20 to +50 °C. During storage/transport: -30 to +60 °C.	
<b>Relative air humidity</b>	Maximum 95 %.	

\* Cross-section min. 0.5 mm² and max. 1.5 mm².

**CME (supply voltages K, L, M, N, Q, R)**

	<b>Single-phase 0.55 - 1.1 kW (supply voltage K, M)</b>	<b>Three-phase 1.5 - 7.5 kW (supply voltage L, N, R, Q)</b>
<b>Power supply to pump</b>	1 x 200-240 V - 10 %/+ 10 %, 50/60 Hz, PE. 1 x 208-230 V - 10 %/+ 10 %, 50/60 Hz, PE.	3 x 380-480 V - 10 %/+ 10 %, 50/60 Hz, PE. 3 x 460-480 V - 10 %/+ 10 %, 60 Hz, PE. 3 x 200-230 V - 10 %/+ 10 %, 50/60 Hz, PE. 3 x 208-230 V - 10 %/+ 10 %, 50/60 Hz, PE.
<b>Backup fuse</b>	Motor sizes of 0.55 to 1.1 kW: Max. 10 A. Standard as well as quick-blow or slow-blow fuses may be used.	Motor sizes of 1.5 to 5.5 kW: Max. 16 A. Motor size 7.5 kW: Max. 32 A. Standard as well as quick-blow or slow-blow fuses may be used.
<b>External start/stop input</b>	External potential-free contact. Maximum contact load: Voltage 5 VDC, current < 5 mA. Screened cable.*	
<b>Digital input</b>	External potential-free contact. Maximum contact load: Voltage 5 VDC, current < 5 mA. Screened cable.*	
<b>Setpoint signals</b>	<ul style="list-style-type: none"> <li>Potentiometer 0-10 VDC, 10 kΩ (via internal voltage supply). Screened cable.* Maximum cable length: 100 m.</li> <li>Voltage signal 0-10 VDC, <math>R_i &gt; 50</math> kΩ. Tolerance: + 0 %/- 3 % at maximum voltage signal. Screened cable.* Maximum cable length: 500 m.</li> <li>Current signal DC 0-20 mA / 4-20 mA, <math>R_i = 175</math> Ω. Tolerance: + 0 %/- 3 % at maximum current signal. Screened cable.* Maximum cable length: 500 m.</li> </ul>	<ul style="list-style-type: none"> <li>Potentiometer 0-10 VDC, 10 kΩ (via internal voltage supply). Screened cable.* Maximum cable length: 100 m.</li> <li>Voltage signal 0-10 VDC, <math>R_i &gt; 50</math> kΩ. Tolerance: + 0 %/- 3 % at maximum voltage signal. Screened cable.* Maximum cable length: 500 m.</li> <li>Current signal DC 0-20 mA / 4-20 mA, <math>R_i = 250</math> Ω. Tolerance: + 0 %/- 3 % at maximum current signal. Screened cable.* Maximum cable length: 500 m.</li> </ul>
<b>Power supply to sensors</b>	The sensors are supplied with electricity via the motor terminal box. <ul style="list-style-type: none"> <li>24 VDC - 10 %/+ 10 %. Maximum load: 40 mA.</li> </ul>	The sensors are supplied with electricity via the motor terminal box. <ul style="list-style-type: none"> <li>24 VDC - 10 %/+ 10 %. Maximum load: 40 mA.</li> </ul>
<b>Sensor signals</b>	<ul style="list-style-type: none"> <li>Voltage signal 0-10 VDC, <math>R_i &gt; 50</math> kΩ. Tolerance: + 0 %/- 3 % at maximum voltage signal. Screened cable.* Maximum cable length: 500 m.</li> <li>Current signal DC 0-20 mA / 4-20 mA, <math>R_i = 175</math> Ω. Tolerance: + 0 %/- 3 % at maximum current signal. Screened cable.* Maximum cable length: 500 m.</li> </ul>	<ul style="list-style-type: none"> <li>Voltage signal 0-10 VDC, <math>R_i &gt; 50</math> kΩ. Tolerance: + 0 %/- 3 % at maximum voltage signal. Screened cable.* Maximum cable length: 500 m.</li> <li>Current signal DC 0-20 mA / 4-20 mA, <math>R_i = 250</math> Ω. Tolerance: + 0 %/- 3 % at maximum current signal. Screened cable.* Maximum cable length: 500 m.</li> </ul>
<b>Signal output</b>	Potential-free changeover contact. Maximum contact load: 250 VAC, 2 A. Minimum contact load: 5 VDC, 10 mA. Screened cable: 0.5 - 2.5 mm <sup>2</sup> . Maximum cable length: 500 m.	
<b>Bus input</b>	Grundfos GENibus protocol, RS-485. 0.5 - 1.5 mm <sup>2</sup> screened 2-core cable. Maximum cable length: 500 m.	
<b>EMC</b>	<b>EN 61800-3:</b> <b>Note:</b> When pumps fitted with 7.5 kW motors are installed in first environment (residential areas), an additional EMC filter is required to obtain class B, group 1 status.	
	<b>Motors of 0.55 to 5.5 kW:</b> Electromagnetic disturbance - first environment (residential areas) - unrestricted distribution, corresponding to CISPR 11, class B, group 1.	
	<b>Motors of 7.5 kW:</b> Electromagnetic disturbance - first environment (residential areas) - restricted distribution. Immunity to electromagnetic disturbance - second environment (industrial areas) - unrestricted distribution, corresponding to CISPR 11, class A, group 1.	
<b>Enclosure class</b>	IP55 (IEC 34-5).	
<b>Insulation class</b>	F (IEC 85).	
<b>Ambient temperature</b>	During operation: -20 to +40 °C. During storage/transport: -40 to +60 °C.	
<b>Relative air humidity</b>	Maximum 95 %.	

\* Cross-section min. 0.5 mm<sup>2</sup> and max. 1.5 mm<sup>2</sup>.

## 24. Customisation

Although the Grundfos CM and CME product range offers a number of pumps for different applications, customers require specific pump solutions to satisfy their needs. Below are the options available for customising the CM and CME pumps. Contact Grundfos for further information or for requests other than the ones mentioned below.

### Motors

#### Motor with multiplug connection

Mains-operated motors fitted with a Harting® 10-pin multiplug connection, HAN 10 ES, enable easy connection to the mains.

**Note:** For CME pumps we offer the solutions shown on page 114.

The purpose of a multiplug connection is to facilitate the electrical installation and service of the pump. The multiplug functions as a plug-and-pump device. Figure 34 shows the position of the multiplug on the mains-operated motor.





Fig. 34 Motor with multiplug connection



Fig. 35 Multiplug logo

TM02 0470 0700


#### Dimensions

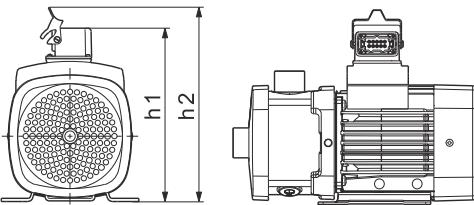

TM04 5847 4609


Pump type	Frame size	h1	h2
CM 1	71	206	237
CM 3	80	206	237
CM 5	90	263	294
	100	283	314
CM 10	71	231	262
CM 15	80	231	262
CM 25	90	273	304
	100	283	314
	112	309	340
	132	309	340

#### Plug connections

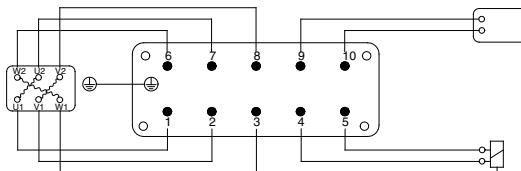


TM01 3702 0700

Fig. 36 Plug connection from motor

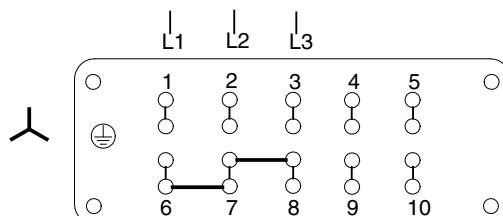

TM01 8703 0700

Fig. 37 Plug connection for star connection

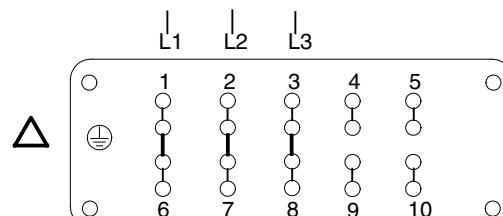

TM01 8704 0700

Fig. 38 Plug connection for delta connection

**Note:** Wire bridges for connections are located in the plug.


## Plug-and-pump solution for CME pumps

To facilitate electrical installation and service, we offer plug-and-pump solutions for CME pumps. These customised solutions are only available on request. Please contact Grundfos.

### New-generation CME (supply voltages S, T, U)

The new-generation CME pumps can be fitted with receptacles in the cable entries of the motor for fast cable connection. Simply plug and pump.

Figure 39 shows how the new-generation CME pumps are connected.

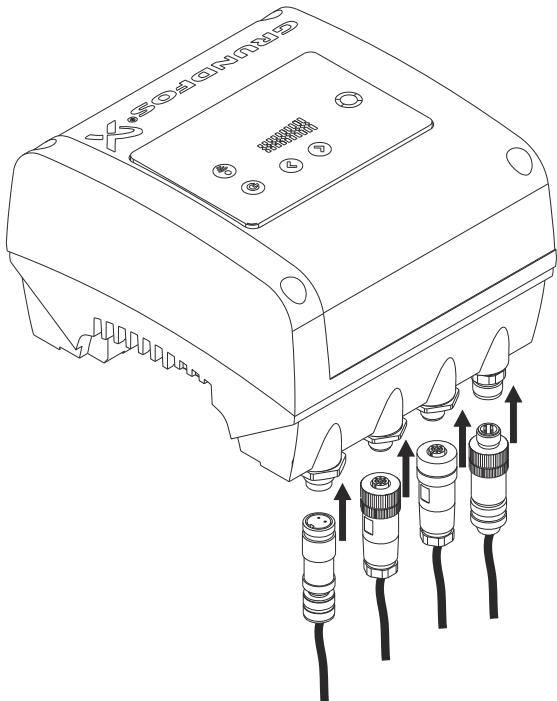



TM05 7677 1413

**Fig. 39** Fast connection of CME pumps

## CME (supply voltages L, N, Q, R)

These three-phase CME pumps can be customised with a detachable cable entry bar. When the cable entry bar is removed, it is possible to disconnect all electrical connections.

Figure 40 shows the location of the detachable cable entry bar on the motor terminal box as well as plugs for mains connection, sensor and communication.

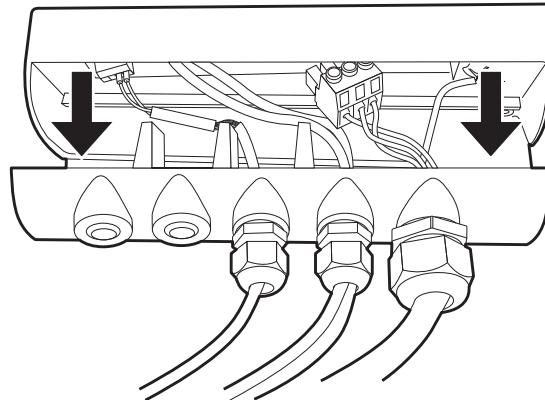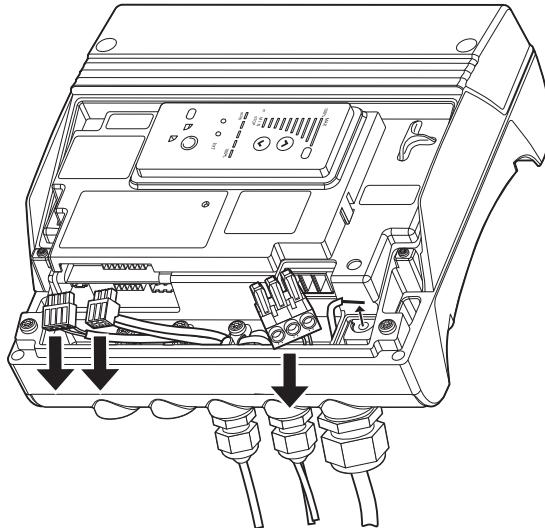**Fig. 40** Location of the detachable cable entry bar

TM03 1964 3405 - TM03 1962 3405

## Motor with anti-condensation heater

**CM**



TM03 2440 4305

**Fig. 41** Mains-operated motor with anti-condensation heater


In applications where condensation in the motor may occur, we recommend to install a motor with an anti-condensation heater on the stator coil ends. The heater keeps the motor temperature higher than the ambient temperature and prevents condensation. In areas with ambient temperatures below 0 °C, it is advisable always to use motors with anti-condensation heater.

High humidity may cause condensation in the motor. Slow condensation occurs as a result of a decreasing ambient temperature; rapid condensation occurs as a result of shock cooling caused by direct sunlight followed by rain.

**Note:** Rapid condensation is not to be confused with the phenomenon which occurs when the pressure inside the motor is lower than the atmospheric pressure. In such cases, moisture is sucked from the atmosphere into the motor through bearings, housings, etc.

In applications with constant humidity levels above 85 %, the drain holes in the drive-end flange must be open. This changes the enclosure class to IP34. If IP55 protection is required due to operation in dusty environments, it is advisable to install a motor with anti-condensation heater.

Figure 42 shows a typical circuit of a three-phase motor with anti-condensation heater.



TM03 4058 1406

**Fig. 42** Three-phase motor with anti-condensation heater

## Legend

Symbol	Designation
K	Contactor
M	Motor

**Note:** Connect the anti-condensation heater to the power supply so that it is on when the motor is switched off.

The following motor sizes are available with anti-condensation heater:

Motors, 50/60 Hz	Power of heating unit [W]	
	Frame size	1 x 24 V      1 x 190-250 V
71/80		23
90		38
100		38
112/132	2 x 38	2 x 38

## CME

The MGE motors fitted to CME pumps incorporate a standstill heating function. No external heater on the stator coil is necessary.

The working principle is that AC voltage is applied to the motor windings. The applied AC voltage will not make the motor run, but will ensure that sufficient heat is generated to prevent condensation in the motor. The terminal box is kept warm and dry by the heat generated via the mains voltage connected. However, it is a condition that the terminal box is not exposed to open air. It must be provided with a suitable cover to protect it from rain and the drain plugs have to be removed to obtain ventilation in motor and terminal box. See *Operation in condensing environments*, on page 18.

## Motors with PTC sensors



TM02 7038 2403

**Fig. 43** PTC sensor incorporated in windings

Built-in PTC sensors (thermistors) protect the motor against overheating. Single-phase motors are protected against slow and rapid overheating. Three-phase motors are protected against slow overheating.

We offer built-in PTC sensors to protect the motor. Three-phase mains-operated motors with supply voltages F, G and O of 3 kW and up have PTC sensors as standard (UL-approved motors have no internal protection).

**Note:** PTC sensors must be connected to an external tripping unit connected to the control circuit.


Protection according to IEC 60034-11:

- slow and rapid overheating.

PTC sensors comply with DIN 44082.

Maximum voltage at the terminals,  $U_{max} = 2.5$  VDC. All tripping units available for DIN 44082 PTC sensors meet this requirement.

Figure 44 shows a typical circuit of a three-phase motor with PTC sensors.

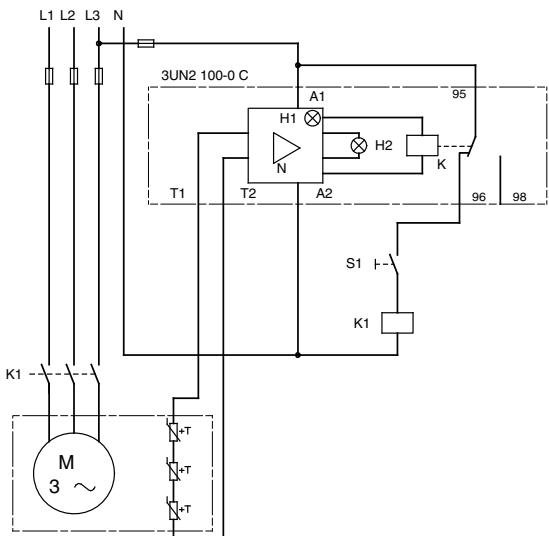

TM00 3965 1494

**Fig. 44** Three-phase motor with PTC sensors

## Legend

Symbol	Designation
S1	On/off switch
K1	Contactor
+T	PTC sensor (thermistor) in motor
M	Motor
3UN2 100-0 C	Tripping unit with automatic resetting
N	Amplifier
K	Output relay
H1	LED "Ready"
H2	LED "Tripped"
A1, A2	Connection for control voltage
T1, T2	Connection for PTC sensor loop

## Motors with thermal switches (PTO)



TM02 7042 2403

**Fig. 45** Thermal switch incorporated in windings

Built-in thermal switches protect the motor against overheating. Single-phase motors are protected against slow and rapid overheating.

Three-phase motors are protected against slow overheating.

We offer mains-operated motors with bimetallic thermal switches in the motor windings.

Three-phase mains-operated motors with supply voltages F, G and O are available with built-in thermal switches.

**Note:** Thermal switches must be connected to an external control circuit to protect the motor against slow overheating. The thermal switches require no tripping unit.

Protection according to IEC 60034-11:


- slow and rapid overheating.

As protection against seizure, the motor must be connected to a motor-protective circuit breaker.

Thermal switches tolerate the following maximum loads:

$U_{max}$	250 VAC
$I_N$	1.5 A
$I_{max}$	5.0 A (locked-rotor and breaking current)

Figure 46 shows a typical circuit of a three-phase motor with built-in bimetallic thermal switches.

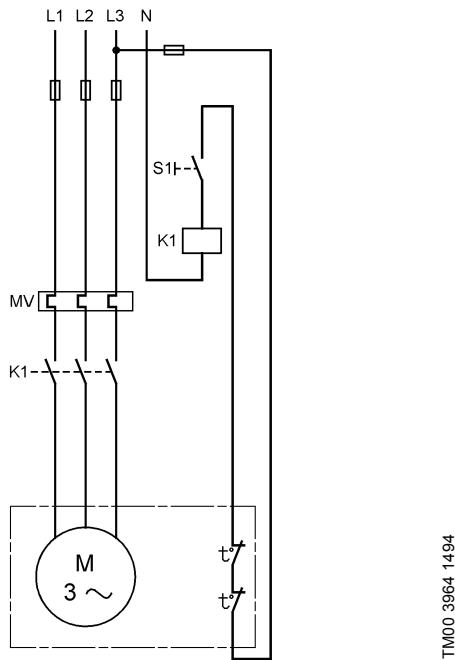

**Fig. 46** Three-phase motor with thermal switches

#### Legend

Symbol	Designation
S1	On/off switch
K1	Contactor
t°	Thermal switch in motor
M	Motor
MV	Motor-protective circuit breaker

#### Undersize and oversize motors

The available motor sizes are shown in section *Motor data* on pages 106 to 109.

Undersize and oversize motors are defined as the next KW size below or above the fitted standard motor.

**Note:** The CM 1, 3 and 5 cannot be combined with frame sizes 112 and 132.

It is advisable to use an oversize motor if the operating conditions fall outside the standard conditions.

We especially recommend oversize motors in these cases:


- The pump is installed at an altitude of more than 1000 metres above sea level.
  - The viscosity or density of the pumped liquid is higher than that of water.
  - The ambient temperature exceeds +55 °C (CM).
- It is advisable to use an undersize motor if the operating conditions do not at all reach the standard conditions.

We especially recommend undersize motors in these cases:

- The viscosity or density of the pumped liquid is lower than that of water.
- The duty point of the pump is constant, and the flow rate is significantly lower than the recommended maximum flow rate.

#### Terminal box positions

As standard the terminal box is mounted in 12 o'clock position as shown in fig. 47. CM pumps with motor frame sizes of 71 and 80 are available with other terminal box positions on special request.

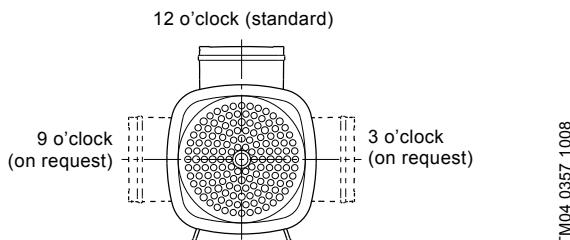

**Fig. 47** Terminal box positions of frame sizes 71 and 80

## Functional modules for CME pumps

CME pumps offer a number of advantages, depending on hardware combinations and software configuration of the motor. For example, various functional modules are available.

### New-generation CME 0.37 - 2.2 kW (supply voltages S, T, U)

As standard, these CME pumps are fitted with the standard functional module. The basic or advanced module is available as a customised solution.

#### Basic functional module (FM 100)

The basic module has only the most necessary inputs for closed- and open-loop operation. The module also enables communication via a GENIbus connection.

The basic module has these connections:

- analog voltage input
- two digital inputs or one digital input and one open-collector output
- GENIbus connection.

#### Standard functional module (FM 200)

The standard module has more inputs and outputs than the basic module and is suitable for even more demanding applications.

The standard module has these connections:

- two analog inputs
- two digital inputs or one digital input and one open-collector output
- Grundfos Digital Sensor input and output
- two signal relay outputs
- GENIbus connection.

#### Advanced functional module (FM 300)

The advanced module has a number of inputs and outputs enabling the motor to be used in advanced applications where many inputs and outputs are required.

The advanced module has these connections:

- three analog inputs
- one analog output
- two dedicated digital inputs
- two configurable digital inputs or open-collector outputs
- Grundfos Digital Sensor input and output
- two Pt100/1000 inputs
- LiqTec sensor inputs
- two signal relay outputs
- GENIbus connection.

## CME 0.37 - 7.5 kW (supply voltages K, L, M, N, Q, R)

As standard, these CME pumps are fitted with the standard functional module. The advanced functional module is available as a customised solution.

#### Standard functional module

The standard module is used for simple control of one parameter, for instance pressure, differential pressure, temperature, differential temperature or flow rate.

The standard module has these connections:

- one digital input
- one analog input.

#### Advanced functional module

The advanced module is identical to the standard module, but has additional connections for further control options.

The advanced module has these connections:

- three digital inputs
- one analog input
- one analog output.

## Pumps

### Pumping of liquids down to -30 °C

We offer custom-built pumps for the pumping of liquids down to -30 °C. The pumps have an oversize neck ring ensuring that impellers do not seize up as a result of thermal expansion.

We offer the above solution for CM and CME in I and G versions (stainless steel).

### Surface treatment

#### Cleaned and dried pumps

Cleaned and dried pumps are recommended for use in applications involving strict demands on cleanliness and surface quality, such as low content of silicone. Prior to assembly, all pump parts are cleaned in 60 to 70 °C water with a cleaning agent. All pump parts are then thoroughly rinsed in de-ionised water and dried. The pump is assembled without any use of silicone lubricants.

Cleaned and dried pumps are not performance-tested.

#### Electropolished stainless-steel pumps

Electropolished pumps are often used in the pharmaceutical industry and in the food and beverage industry where materials and surface quality must meet strict requirements to hygiene or corrosion resistance.

Electropolishing removes burrs as well as metallic and non-metallic inclusions, providing a smooth, clean and corrosion-resistant stainless-steel surface.

First, all components are pickled in a mixture of nitric and hydrofluoric acid. Subsequently, the components are electropolished in a mixture of sulphuric and phosphoric acid. Finally, the components are passivated in nitric acid.

To meet the strict hygienic requirements to material and surface quality, we offer electropolished stainless-steel pumps with the following surface quality:

Surface quality: Ra ≤ 0.8 µm.

#### Alternative colouring

We offer custom-built pumps in any NCS- or RAL-specified colour to suit your requirements!

The used paint is water-based. Painted parts correspond to corrosion class III.

All pump types and sizes are available with alternative colouring.

### Customised nameplate

We offer additional customised nameplates attached to the pump:

- A nameplate supplied by you.
- A Grundfos nameplate customised in terms of a specific duty point.
- A Grundfos nameplate with a tag number.

**Note:** The Grundfos standard nameplate is always fitted to the pump.

### Shaft seal arrangements

The shaft seal is developed with customisation in mind. Depending on media, you may combine the seal faces in any way.

Available stationary seal faces: Q, B.


Available rotating seal faces: Q, V.

Rubber: E, V and K.

**Note:** For further details about seal face material codes, see on page 11.

### Alternative connection positions

The pump is available with various connection positions on special request. See fig. 48.

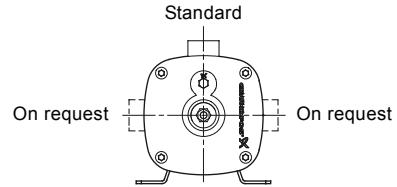

TM03 8709 1008


Fig. 48 Alternative connection positions

### Alternative pipe connections

A wide range of pipe connections are available for the CM and CME pumps:

- Tri-Clamp®
- DIN, JIS, ANSI flange (combi flange)
- Victaulic® coupling
- Whitworth thread Rp
- internal NPT thread.

The available pipe connections are shown in fig. 49.

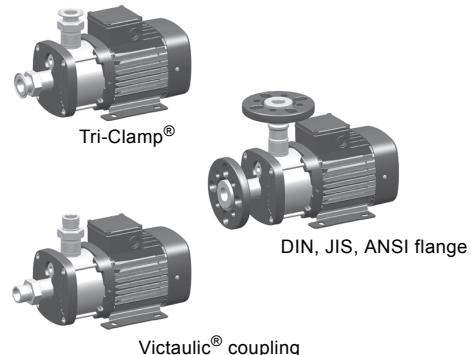

TM04 3937 0409

Fig. 49 Examples of pipe connections


## 25. Accessories

### Pipework connections

Various sets of flanges and couplings are available for pipework connection.

#### Distance piece

The distance piece is intended for mounting on the discharge port in order to improve the accessibility when connecting the pump to the piping system. The distance piece is made of brass.



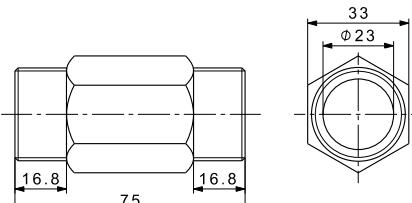
Distance piece	Pump type	Pipework connection	Pump thread	Product number
	CM 1 CM 3 CM 5	1"	R	96587201

TM04 5800 4009

### Flange sets for CM(E) (DIN/ANSI/JIS)

All materials in contact with the pumped liquids are made of stainless steel EN 1.4408/AISI 316.

The pipe stub is made of stainless steel EN 1.4408/AISI 316 and the flange part is made of cast iron EN-GJL-200.

Flange	Pump type	Pipework connection	Pump thread	$L^*$ [mm]		Product number
				Flange mounted on pump inlet	Flange mounted on pump outlet	
	CM 1 CM 3  CM 5	DN 32	Rp			96904693
			NPT			96904705
			Rp	49.0	78.0	96904696
			NPT			96904708
	CM 10	DN 40	Rp			96904699
			NPT	44.0	68.0	96904711
	CM 15 CM 25	DN 50	Rp			96904702
			NPT	48.0	68.0	96904714

TM04 3867 0309      TM04 3869 0309      TM04 3868 0309

\* Length from outer edge of flange to pump suction or discharge port.

Note: Please pay attention to the compatibility between pump and flange before ordering. See tables below.

**CM pumps compatible with DIN/ANSI/JIS flanges**

Pump type	Material version	MG71/80 1-ph	MG71/80 3-ph	MG 90 1-ph	MG 90 3-ph	MG 100	MG 112
CM 1, 3, 5	Cast iron		•	•	•		
	Stainless steel	•	•		•	•	
CM 10, 15, 25	Cast iron	•	•	•	•	•	•
	Stainless steel	•	•	•	•	•	•





**CME pumps compatible with DIN/ANSI/JIS flanges**

Pump type	Material version	Supply voltages K, L, M, N, Q, R					Supply voltages S, T, U	
		MGE 71/80	MGE 90S	MGE 90L	MGE 100	MGE 112/132	MGE 71/80	MGE 90
CME 1, 3, 5	Cast iron	• <sup>2)</sup>		•	•			
	Stainless steel	• <sup>1)</sup>		•	•			
CME 10, 15, 25	Cast iron	•		•	•	•	•	•
	Stainless steel	•		•	•	•	•	•

<sup>1)</sup> Only 10 mm clearance between flange and terminal box.<sup>2)</sup> Only 9 mm clearance between flange and terminal box.**Counter-flanges for CM(E)-A**

Counter-flanges for CM(E)-A pumps are made of cast iron EN-GJL-200.










A counter-flange set consists of one counter-flange, one gasket, bolts and nuts.

Counter-flange	Pump type	Description	Rated pressure	Pipework connection	Product number
 TM03 0400 3705	CM(E) 1-A CM(E) 3-A CM(E) 5-A	Threaded	16 bar, EN 1092-2	Rp 1 1/4	00419901
		For welding	25 bar, EN 1092-2	32 mm, nominal	00419902
 TM03 0401 3705	CM(E) 10-A	Threaded	16 bar, EN 1092-2	Rp 1 1/2	00429902
		Threaded	16 bar, EN 1092-2	Rp 2	00429904
		For welding	25 bar, EN 1092-2	40 mm, nominal	00429901
		For welding	40 bar, special flange	50 mm, nominal	00429903
 TM02 7203 2803	CM(E) 15-A CM(E) 25-A	Threaded	16 bar, special flange	Rp 2	00339903
		Threaded	16 bar, special flange	Rp 2 1/2	00339904
 TM03 0402 3705	CM(E) 15-A CM(E) 25-A	Threaded	16 bar, special flange	Rp 2 1/2	96509578
		For welding	25 bar, EN 1092-2	50 mm, nominal	00339901
		For welding	40 bar, special flange	65 mm, nominal	00339902


## Counter-flanges for CM(E)-I/G

Counter-flanges for CM(E)-I/G pumps are made of stainless steel EN 1.4401/AISI 316.

A counter-flange set consists of one counter-flange, one gasket, bolts and nuts.

Counter-flange	Pump type	Description	Rated pressure	Pipework connection	Product number
	TM03 0400 3705 CM(E) 1-I/G CM(E) 3-I/G CM(E) 5-I/G	Threaded	16 bar, EN 1092-2	Rp 1 1/4	00415304
		For welding	25 bar, EN 1092-2	32 mm, nominal	00415305
	TM03 0401 3705	Threaded	16 bar, EN 1092-2	Rp 1 1/2	00425245
	TM02 7202 2803 CM(E) 10-I/G	Threaded	16 bar, EN 1092-2	Rp 2	96509570
	TM03 0401 3705	For welding	25 bar, EN 1092-2	40 mm, nominal	00425246
	TM02 7202 2803	For welding	25 bar, special flange	50 mm, nominal	96509571
	TM00 0402 3705	Threaded	16 bar, EN 1092-2	Rp 2	00335254
	TM02 7203 2803 CM(E) 15-I/G CM(E) 25-I/G	Threaded	16 bar, special flange	Rp 2 1/2	96509575
	TM03 0402 3705	Threaded	16 bar, special flange	Rp 2 1/2	96509579
		For welding	25 bar, EN 1092-2	50 mm, nominal	00335255
	TM00 7203 2803	For welding	25 bar, special flange	65 mm, nominal	96509573

## Victaulic® connections for CM(E)

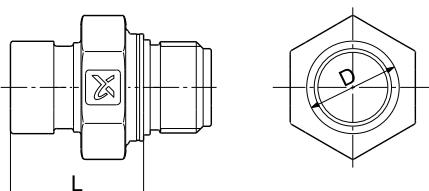
Victaulic® connection	Pump type	Pump thread	D [mm]	L* [mm]	Product number
 TM04 3865 0309	CM 1	Rp	33.7	48.5	96904694
	CM 3	NPT			96904706
	CM 5	Rp	33.7/42.4	48.5	96904697
	CM 10	Rp	48.3	48.5	96904700
	CM 15	Rp			96904712
	CM 25	NPT	60.3	50.1	96904703
					96904715

\* Length from outer edge of connection to pump suction or discharge port.

### Coupling, pipe stub and gasket for Victaulic® connections

Parts in contact with the pumped liquid are made of stainless steel EN 1.4401/AISI 316, and rubber.



A Victaulic® coupling set consists of two coupling halves (Victaulic, type 77), one gasket, one pipe stub (for welding or threaded), bolts and nuts.

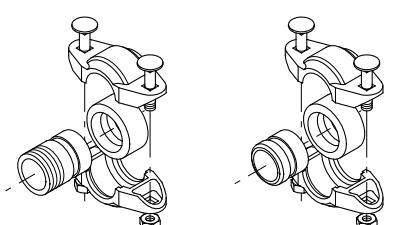Coupling and pipe stub	Pump type	Pipe stub	Pipework connection	Rubber parts	Number of coupling sets required	Product number
 TM00 3808 1094	CM(E) 1 CM(E) 3 CM(E) 5*	Threaded	R 1	EPDM	2	97575245
				FKM	2	97575246
		For welding	DN 25	EPDM	2	97575247
				FKM	2	97575248
	CM(E) 5**	Threaded	R 1 1/4	EPDM	1	00419911
				FKM	1	00419905
		For welding	DN 32	EPDM	1	00419912
				FKM	1	00419904
	CM(E) 10	Threaded	R 1 1/2	EPDM	2	97575249
				FKM	2	97575250
		For welding	DN 40	EPDM	2	97575251
				FKM	2	97575252
	CM(E) 15 CM(E) 25	Threaded	R 2	EPDM	2	00339911
				FKM	2	00339918
		For welding	DN 50	EPDM	2	00339910
				FKM	2	00339917

\* For discharge port. **Note:** Only one coupling set is required for the discharge port.




\*\* For suction port.

## Tri-Clamp® connections for CM(E)

Tri-Clamp®	Pump type	Pump thread	D [mm]	L* [mm]	Product number
	CM 1	Rp	50.4	40.3	96904695
	CM 3	NPT			96904707
	CM 5	Rp	50.4	35.3	96904698
	CM 10	NPT	50.4	37.4	96904710
	CM 15	Rp	63.9	37.4	96904713
	CM 25	NPT			96904704
					96904716

\* Length from outer edge of Tri-Clamp® connection to pump suction or discharge port.

### Clamping ring, pipe stub and gasket for Tri-Clamp® connections

	Clamping ring	Pipe stub	Gasket
	 TM03 4645 2406		
Pump type	Nominal diameter [mm]	A [mm]	B [mm]
CM(E) 1, 3, 5, 10	38.0	92.0	59.5
CM(E) 15, 25	51.0	104.4	74.0
	A [mm]	B [mm]	C [mm]
			D [mm]
			38.6
			51.6
	A [mm]	B [mm]	
			35.3
			48.0
			50.5
			64.0

The clamping ring is made of stainless steel EN 1.4301/AISI 304.

The pipe stub is made of stainless steel EN 1.4401/AISI 316.

The gasket is made of PTFE or EPDM.


Pump type	Pipework connection	Connection material	Gasket	Pressure [bar]	Number of coupling sets required	Product number
CM(E) 1, 3, 5, 10	DN 32		EPDM PTFE		2	96515374 96515375
CM(E) 15, 25	DN 50	Stainless steel	EPDM PTFE	16	2	96515376 96515377

## Potentiometer for CME

The potentiometer is for setpoint setting and start/stop of the CME pump.

Product	Product number
External potentiometer with cabinet for wall mounting	625468

## Communication interface modules (CIM) for CME

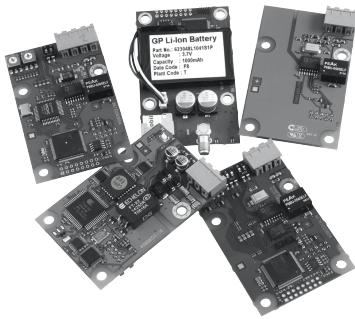

TM05 7508 1113

**Fig. 50** Grundfos CIM modules

A CIM module is an add-on communication interface module for the new-generation MGE motors. The CIM module enables data transmission between the pump and an external system, for example a BMS (building management system) or SCADA system.

We offer the following CIM modules:

Unit type	Fieldbus protocol	Product number
CIM 50	GENIbus	96824631
CIM 100	LonWorks	96824797
CIM 150	PROFIBUS DP	96824793
CIM 200	Modbus RTU	96824796
CIM 250	GSM/GPRS	96824795
CIM 270	GRM	96898815
CIM 300	BACnet MS/TP	96893770

## Communication interface units (CIU) for CME



GRA6118

**Fig. 51** Grundfos CIU unit

A CIU unit enables communication of operating data, such as measured values and setpoints, between CME pumps and a building management system. The CIU unit incorporates a 24-240 VAC/VDC power supply module and a CIM module. It can either be mounted on a DIN rail or on a wall.

We offer the following CIU units:

Unit type	Fieldbus protocol	Product number
CIU 100	LonWorks	96753735
CIU 150	PROFIBUS DP	96753081
CIU 200	Modbus RTU	96753082
CIU 250	GSM	96787106
CIU 270	GRM	Contact Grundfos
CIU 300	BACnet MS/TP	96893769

**Note:** The CIU is not required for the new-generation CME pumps (supply voltages S, T, U).

For further information about data communication via CIU units and fieldbus protocols, see the CIU documentation available in WebCAPS.

## Grundfos GO Remote

The Grundfos GO Remote is used for wireless infrared or radio communication with the pumps.

Various Grundfos GO Remote variants are available. The variants are described in the following.

### MI 201

The MI 201 is a complete solution, consisting of an Apple iPod touch 4G and a Grundfos cover for infrared and radio communication with Grundfos pumps or systems.



**Fig. 52** MI 201

Supplied with the product:

- Apple iPod touch 4G incl. accessories
- Grundfos MI 201 cover
- battery charger
- quick guide.

### MI 202 and MI 204

The MI 202 and MI 204 are an add-on modules with built-in infrared and radio communication. The MI 202 can be used in conjunction with Apple iPod Touch 4, iPhone 4 and 4S.

The MI 204 can be used in conjunction with Apple iPod Touch 5G, iPhone 5 or later.



**Fig. 53** MI 202 and MI 204

Supplied with the product:

- Grundfos MI 202 or 204
- sleeve
- quick guide
- charger cable.

### MI 301

The MI 301 is a module with built-in infrared and radio communication. The MI 301 must be used in conjunction with an Android or iOS-based Smartphone with a Bluetooth connection. The MI 301 has rechargeable Li-ion battery and must be charged separately.



TM05 3890 1712

**Fig. 54** MI 301

Supplied with the product:

- Grundfos MI 301
- battery charger
- quick guide.

### Product numbers

Grundfos GO Remote variant	Product number
Grundfos MI 201	98140638
Grundfos MI 202	98046376
Grundfos MI 204	98424092
Grundfos MI 301	98046408

### Supported units

Make	Model	Operating system	MI 201	MI 202	MI 204	MI 301
Apple	iPod touch 4G	iOS 5.0 or later	•	•	•	
	iPhone 4, 4S			•	•	
	iPod touch 5G	iOS 6.0 or later		•	•	
	iPhone 5			•	•	
HTC	Desire S	Android 2.3.3 or later			•	
	Sensation	Android 2.3.4 or later			•	
Samsung	Galaxy S II				•	
	Galaxy Nexus	Android 4.0 or later			•	
LG	Google Nexus 4	Android 4.2 or later			•	

**Note:** Similar Android and iOS-based devices may work as well, but are not supported by Grundfos.

## Sensors for CME

The sensors must be fitted to the pipework with suitable fittings.

Accessory	Type	Supplier	Measuring range	Product number
Flowmeter	SITRANS FM MAGFLO MAG 5100 W	Siemens	1-5 m <sup>3</sup> (DN 25)	ID8285
Flowmeter	SITRANS FM MAGFLO MAG 5100 W	Siemens	3-10 m <sup>3</sup> (DN 40)	ID8286
Flowmeter	SITRANS FM MAGFLO MAG 5100 W	Siemens	6-30 m <sup>3</sup> (DN 65)	ID8287
Flowmeter	SITRANS FM MAGFLO MAG 5100 W	Siemens	20-75 m <sup>3</sup> (DN 100)	ID8288
Temperature sensor	TTA (0) 25	Carlo Gavazzi	0 to +25 °C	96432591
Temperature sensor	TTA (-25) 25	Carlo Gavazzi	-25 to +25 °C	96430194
Temperature sensor	TTA (50) 100	Carlo Gavazzi	+50 to +100 °C	96432592
Temperature sensor	TTA (0) 150	Carlo Gavazzi	0 to +150 °C	96430195
Accessory for temperature sensor. All with 1/2 RG connection.	Protecting tube Ø9 x 50 mm	Carlo Gavazzi		96430201
	Protecting tube Ø9 x 100 mm	Carlo Gavazzi		96430202
	Cutting ring bush	Carlo Gavazzi		96430203
Temperature sensor, ambient temperature	WR 52	tmg (Plesner)	-50 to +50 °C	ID8295
Differential-temperature sensor	ETSD	Honsberg	0 to +20 °C	96409362
Differential-temperature sensor	ETSD	Honsberg	0 to +50 °C	96409363

**Note:** All sensors have 4-20 mA signal output.

### Danfoss pressure sensor kits for CME pumps and CM pumps connected to Grundfos CUE

The kit comprises:	Pressure range [bar]	Temperature range	Product number
• Danfoss pressure transmitter, type MBS 3000, with 2 m screened cable Connection: G 1/2 A (DIN 16288 - B6kt)	0-4		96428014
• 5 cable clips (black)	0-6		96428015
• Installation and operating instructions PT (400212)	0-10	-40 to +85 °C	96428016
	0-16		96428017
	0-25		96428018

### DPI differential-pressure sensor kit

The kit comprises:	Pressure range [bar]	Product number
• 1 sensor incl. 0.9 m screened cable (7/16" connections)	0 - 0.6	96611522
• 1 original DPI bracket (for wall mounting)	0 - 1.0	96611523
• 1 Grundfos bracket (for mounting on motor)	0 - 1.6	96611524
• 2 M4 screws for mounting of sensor on bracket	0 - 2.5	96611525
• 1 M6 screw (self-cutting) for mounting on MGE 90/100	0 - 4.0	96611526
• 1 M8 screw (self-cutting) for mounting on MGE 112/132	0 - 6.0	96611527
• 3 capillary tubes (short/long)	0 - 10	96611550
• 2 fittings (1/4" - 7/16")		
• 5 cable clips (black)		
• Installation and operating instructions (480675)		
• Service kit instructions		

## MP 204 motor protector



TM03 1471 2205

**Fig. 55** MP 204

The MP 204 is an electronic motor protector and data collecting unit. Apart from protecting the motor, it can also send information to a control unit via GENibus, like for instance:

- trip
- warning
- energy consumption
- input power
- motor temperature.

The MP 204 protects the motor primarily by measuring the motor current by means of a true RMS measurement.

The pump is protected secondarily by measuring the temperature with a Tempcon sensor, a Pt100/Pt1000 sensor and a PTC sensor/thermal switch.

The MP 204 is designed for single- and three-phase motors.

**Note:** The MP 204 must not be used together with frequency converters.

### Features

- Phase-sequence monitoring
- indication of current or temperature
- input for PTC sensor/thermal switch
- indication of temperature in °C or °F
- 4-digit, 7-segment display
- setting and status reading with the Grundfos GO Remote
- setting and status reading via the Grundfos GENibus fieldbus.

### Tripping conditions

- Overload
- underload (dry running)
- temperature
- missing phase
- phase sequence
- overvoltage
- undervoltage
- power factor ( $\cos \phi$ )
- current unbalance.

### Warnings

- Overload
- underload
- temperature
- overvoltage
- undervoltage
- power factor ( $\cos \phi$ )
- run capacitor (single-phase operation)
- starting capacitor (single-phase operation)
- loss of communication in network
- harmonic distortion.

### Learning function

- Phase sequence (three-phase operation)
- run capacitor (single-phase operation)
- starting capacitor (single-phase operation)
- identification and measurement of Pt100/Pt1000 sensor circuit.

### Product number

Description	Product number
MP 204 motor protector	96079927

## Cover for CM motor

The cover protects the motor from ingress of liquid, especially if the pump is installed in a vertically tilted position with the motor end pointing upwards.

### Product number

Description	Product number
Cover for CM motors, frame sizes 71 and 80	97528743

## Angled cable gland




TM05 0729 1411

**Fig. 56** Angled cable gland with O-ring and lock nut

Description	Product number
Angled cable gland with O-ring and lock nut	97842998

## 26. Further product documentation

### WebCAPS

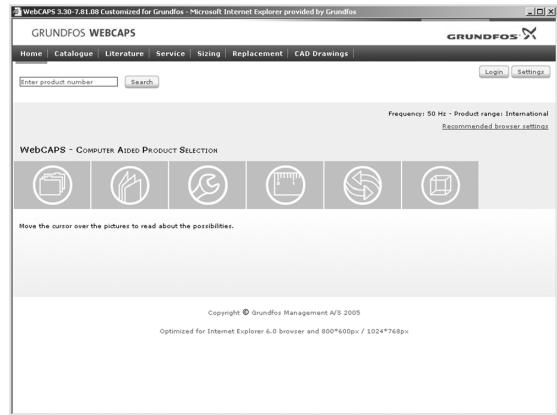

WebCAPS is a **Web-based Computer Aided Product Selection** program available on [www.grundfos.com](http://www.grundfos.com).

WebCAPS contains detailed information on more than 220,000 Grundfos products in more than 30 languages.

Information in WebCAPS is divided into six sections:

- Catalogue
- Literature
- Service
- Sizing
- Replacement
- CAD drawings.

This screenshot shows the 'Catalogue' section of WebCAPS. It displays a search results table for 'CR 10' pumps. The table includes columns for Product No., Product name, Phase, Voltage, Shaft seal, and Pump version. One row is highlighted with a yellow background. To the right of the table is a detailed product page for 'CR 10-A' with a graph of pump performance curves (QH) and a table of technical specifications like speed, flow rate, and head.

#### Catalogue

Based on fields of application and pump types, this section contains the following:

- technical data
- curves (QH, Eta, P1, P2, etc.) which can be adapted to the density and viscosity of the pumped liquid and show the number of pumps in operation
- product photos
- dimensional drawings
- wiring diagrams
- quotation texts, etc.

This screenshot shows the 'Literature' section of WebCAPS. It displays a search results table for 'CR' pumps. The table includes columns for Product No., Product name, Language, and Product type. One row is highlighted with a yellow background. To the right is a thumbnail image of a 'GRUNDFOS DATA BOOKLET' for 'Vertical multistage centrifugal pumps 50 Hz'.

#### Literature

This section contains all the latest documents of a given pump, such as

- data booklets
- installation and operating instructions
- service documentation, such as Service kit catalogue and Service kit instructions
- quick guides
- product brochures.

This screenshot shows the 'Service' section of WebCAPS. It displays a search results table for 'CR' pumps. The table includes columns for Product No., Product name, Phase, and Pump version. One row is highlighted with a yellow background. To the right is a detailed diagram of a pump assembly with various parts labeled.

#### Service

This section contains an easy-to-use interactive service catalogue. Here you can find and identify service parts of both existing and discontinued Grundfos pumps. Furthermore, the section contains service videos showing you how to replace service parts.

## WinCAPS



Fig. 57 WinCAPS DVD

### Sizing

This section is based on different fields of application and installation examples and gives easy step-by-step instructions in how to size a product:

- Select the most suitable and efficient pump for your installation.
- Carry out advanced calculations based on energy consumption, payback periods, load profiles, life cycle costs, etc.
- Analyse your selected pump via the built-in life cycle cost tool.
- Determine the flow velocity in wastewater applications, etc.

### Replacement

In this section you find a guide to selecting and comparing replacement data of an installed pump in order to replace the pump with a more efficient Grundfos pump.

The section contains replacement data of a wide range of pumps produced by other manufacturers than Grundfos.

Based on an easy step-by-step guide, you can compare Grundfos pumps with the one you have installed on your site. When you have specified the installed pump, the guide will suggest a number of Grundfos pumps which can improve both comfort and efficiency.

### CAD drawings

In this section, it is possible to download 2-dimensional (2D) and 3-dimensional (3D) CAD drawings of most Grundfos pumps.

These formats are available in WebCAPS:

#### 2-dimensional drawings:

- .dxf, wireframe drawings
- .dwg, wireframe drawings

#### 3-dimensional drawings:

- .dwg, wireframe drawings (without surfaces)
- .stp, solid drawings (with surfaces)
- .eprt, E-drawings.

WinCAPS is a **Windows-based Computer Aided Product Selection** program containing detailed information on more than 220,000 Grundfos products in more than 30 languages.

The program contains the same features and functions as WebCAPS, but is an ideal solution if no internet connection is available.

WinCAPS is available on DVD and updated once a year.

## GO CAPS

Mobile solution for professionals on the GO!



CAPS functionality on the mobile workplace.

Available on the  
**App Store**



Subject to alterations.

be think innovate

---

<b>96903467 0813</b>
ECM: 1116812

**GRUNDFOS A/S**  
DK-8850 Bjerringbro, Denmark  
Telephone: +45 87 50 14 00  
[www.grundfos.com](http://www.grundfos.com)

**GRUNDFOS** 

The name Grundfos, the Grundfos logo, and be think innovate are registered trademarks owned by Grundfos Holding A/S or Grundfos A/S, Denmark. All rights reserved worldwide.

© Copyright Grundfos Holding A/S